
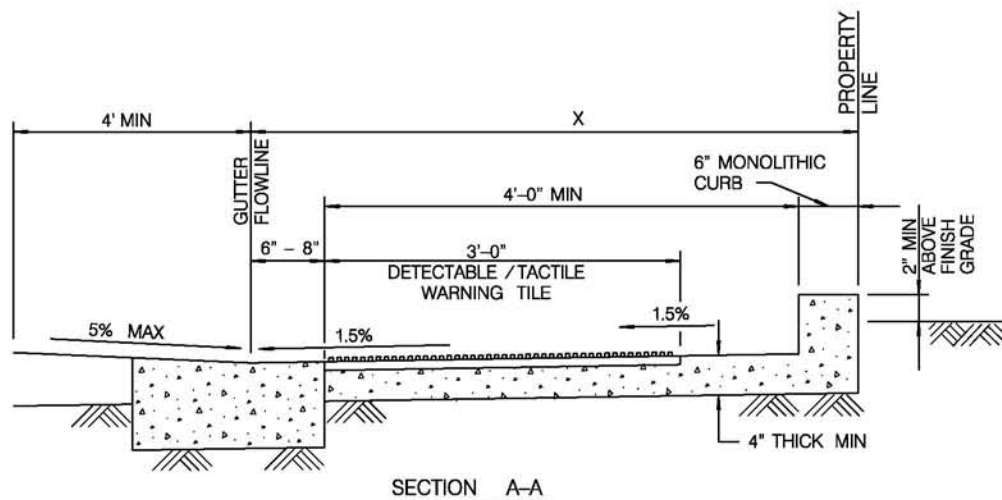
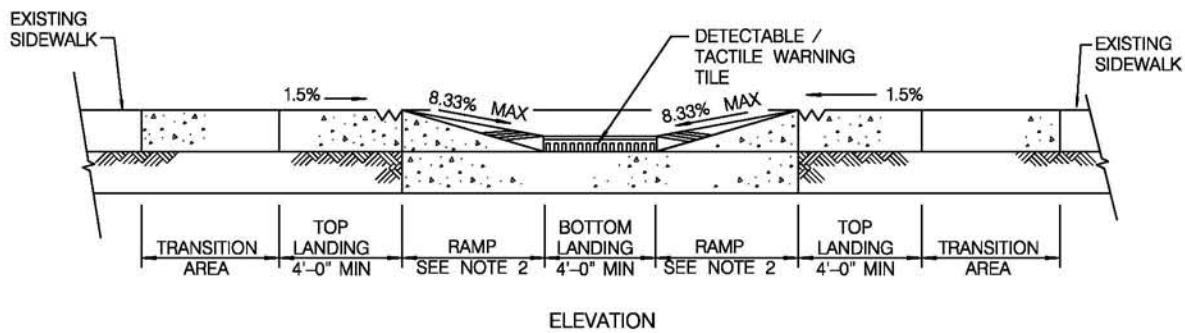


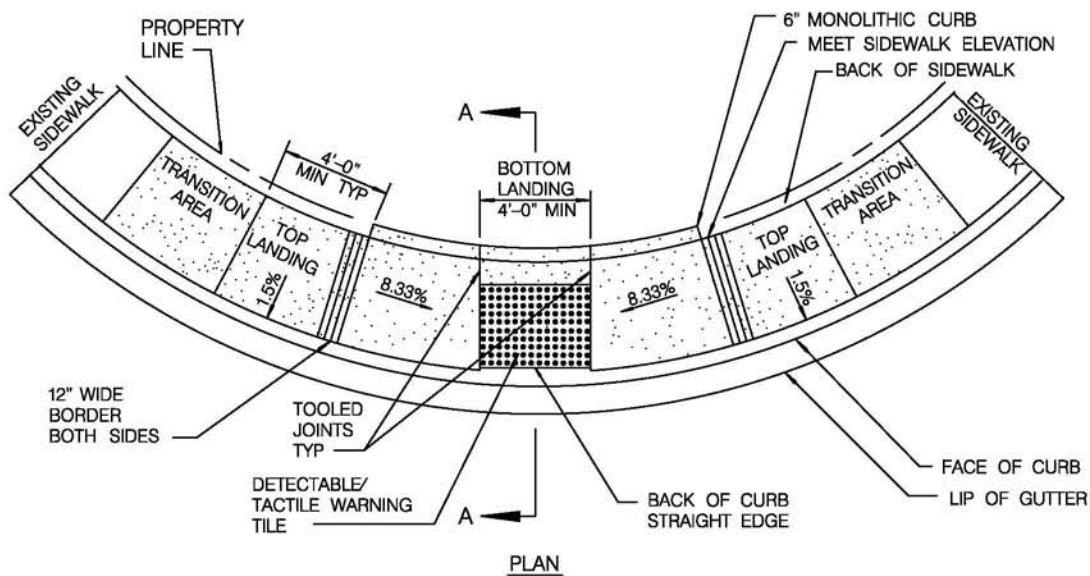

NOTES

1. TYPE C1 CURB RAMP SHALL ONLY BE USED TO MITIGATE EXISTING CONDITIONS WHERE INADEQUATE RIGHT OF WAY EXISTS. TYPE C1 SHALL BE USED WHEN $X < 8'$. X = DISTANCE FROM FACE OF CURB TO PROPERTY LINE.
2. SEE SDG-130 FOR ADDITIONAL CURB RAMP DETAILS AND INFORMATION.

REVISION	BY	APPROVED	DATE
ORIGINAL	SS	A. OSKQUI	12/03
UPDATE	FC	A. OSKQUI	12/06
UPDATE	FC	A. OSKQUI	12/08
UPDATE	KA	J. NAGELVOORT	01/12

CITY OF SAN DIEGO - STANDARD DRAWING

CURB RAMP - TYPE C1

RECOMMENDED BY THE CITY OF SAN DIEGO
STANDARDS COMMITTEE

H. Hadli

1/31/2012

COORDINATOR R.C.E. 65271 DATE

DRAWING
NUMBER

SDG-134