
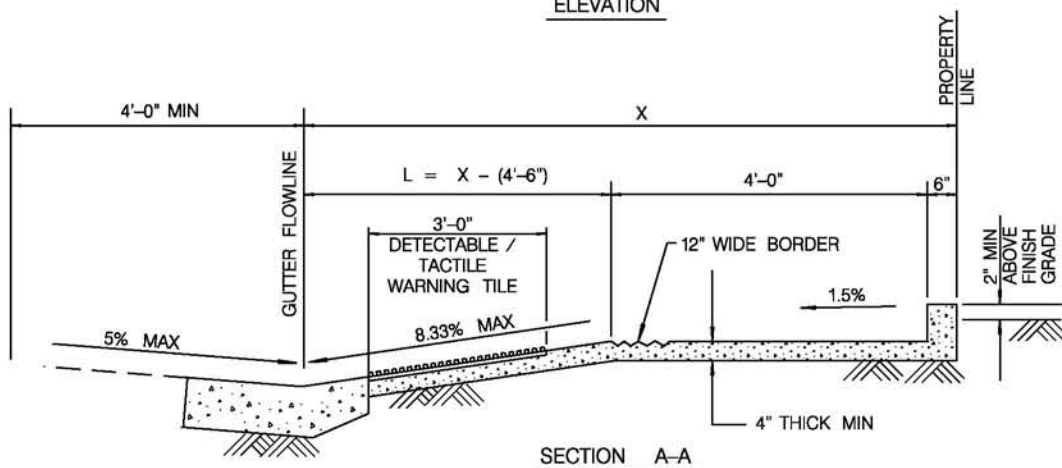
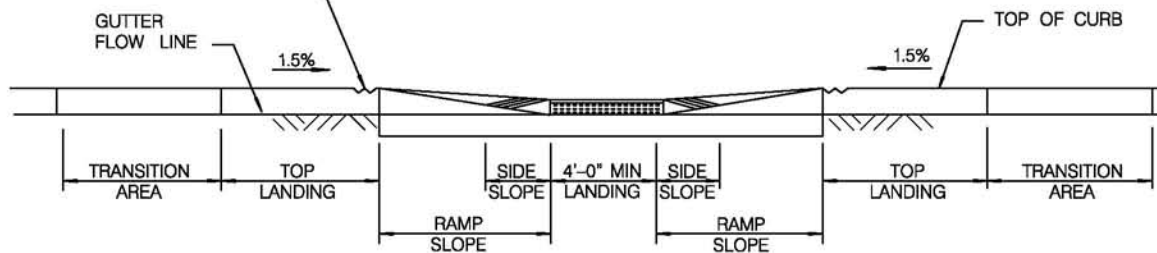


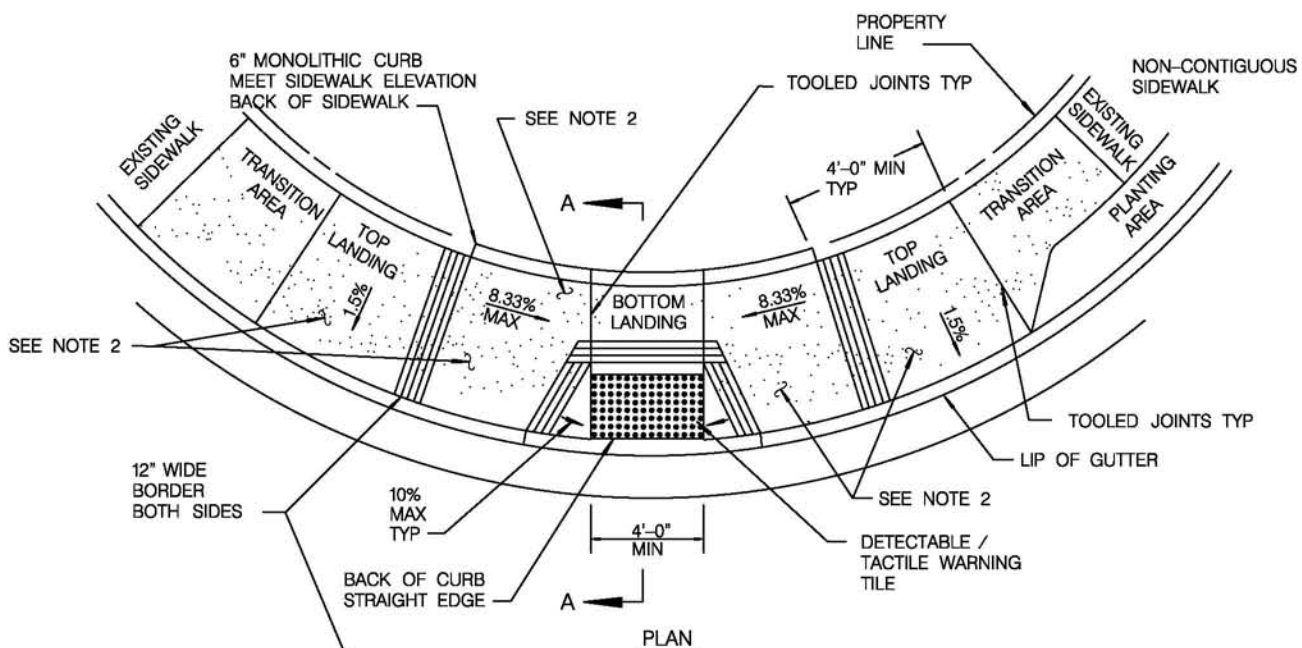

NOTES

1. TYPE C2 CURB RAMP SHALL ONLY BE USED TO MITIGATE EXISTING CONDITIONS WHERE INADEQUATE RIGHT OF WAY EXISTS. TYPE C2 SHALL BE USED WHEN $X=8'$ OR $8' < X < 10'$.
 X =DISTANCE FROM FACE OF CURB TO PROPERTY LINE.
2. SEE SDG-130 FOR ADDITIONAL CURB RAMP DETAILS AND INFORMATION.

REVISION	BY	APPROVED	DATE
ORIGINAL	SS	A. OSKOUI	12/03
UPDATE	FC	A. OSKOUI	12/06
UPDATE	FC	A. OSKOUI	12/08
UPDATE	KA	J. NAGELVOORT	01/10

CITY OF SAN DIEGO - STANDARD DRAWING

CURB RAMP - TYPE C2

RECOMMENDED BY THE CITY OF SAN DIEGO
STANDARDS COMMITTEE

H. Hadi 1/31/2012
COORDINATOR R.C.E. 65271 DATE

DRAWING
NUMBER

SDG-135