



**PLAN VIEW**

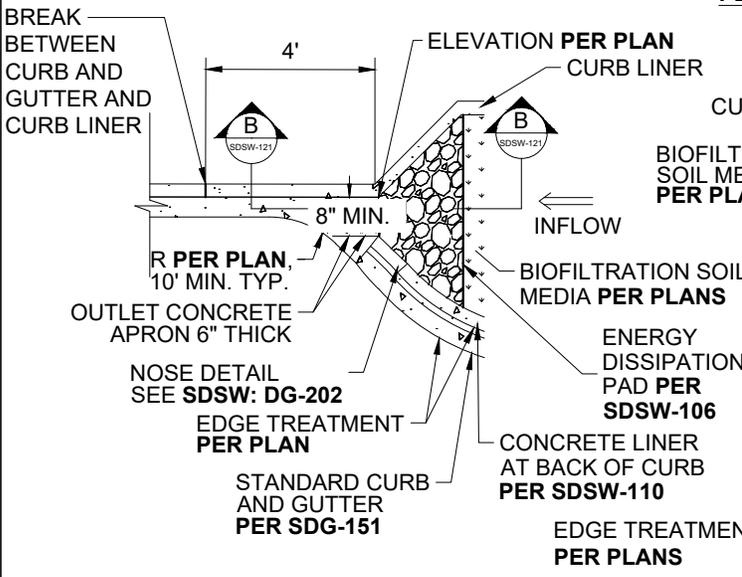

**OUTLET PLAN VIEW**

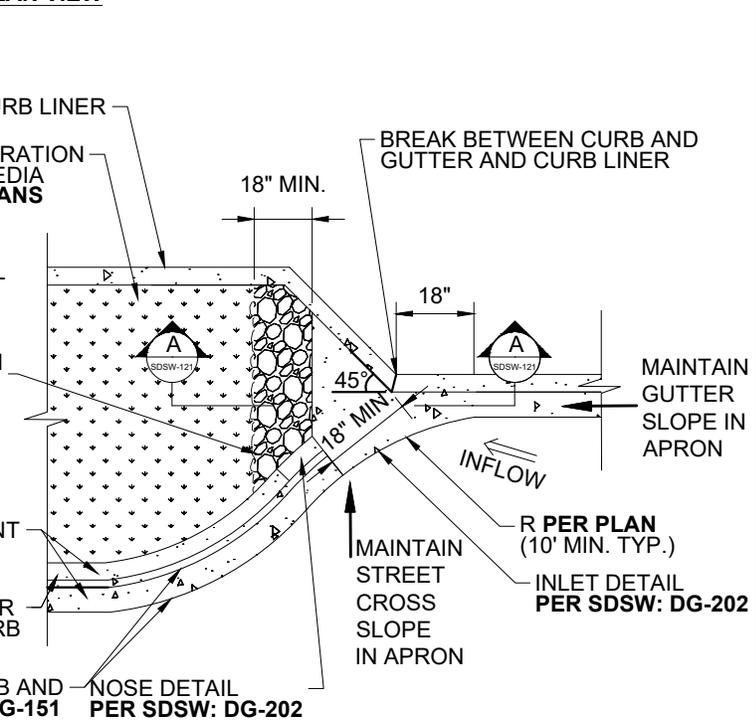

**INLET PLAN VIEW**

**NOTES:**

1. LONGITUDINAL SLOPE OF BIOFILTRATION CURB EXTENSION MATCHES ROAD WHEN 2% OR FLATTER AS REQUIRED PER DESIGN PLANS. THIS DETAIL SHOULD NOT BE USED FOR STREET LONGITUDINAL SLOPES GREATER THAN 8%.
2. CONCRETE LINER ELEVATION MUST BE SET ABOVE INLET AND OUTLET ELEVATIONS TO ALLOW OVERFLOW TO DRAIN TO STREET BEFORE PONDING LEVEL REACHES CONCRETE LINER.
3. CHECK DAMS REQUIRED WHEN SLOPE EXCEEDS 2.0%. REFER TO PLANS FOR LOCATION PLACEMENT. CHECK DAM TOP ELEVATIONS SHALL NOT EXCEED THE INLET ELEVATION. REFER TO SDSW-114, SDSW-115, AND SDSW-116.
4. DEPTH OF SYSTEM AS SHOWN ON DESIGN PLANS SHALL BE SIZED TO ADDRESS STORM WATER MANAGEMENT REQUIREMENTS.
5. BIOFILTRATION CELLS TO BE AT A MINIMUM OF 10' AWAY FROM THE APEX OF THE NEARBY INTERSECTIONS.
6. DESIGN OF STORMWATER INFRASTRUCTURE SHALL CONFORM TO THE STORMWATER STANDARDS MANUAL AND DRAINAGE DESIGN MANUAL, AND SHALL BE SUBJECT TO REVIEW. USE OF THIS DETAIL DOES NOT PRECLUDE SUCH REQUIREMENTS.

REVISION	BY	APPROVED	DATE
ORIGINAL	RC	R. AMEN	02/26

CITY OF SAN DIEGO – DESIGN GUIDE

**BIOFILTRATION CURB EXTENSION  
ADJACENT TO PARKWAY**

RECOMMENDED BY THE CITY  
OF SAN DIEGO STANDARDS COMMITTEE

*Alaine James 2/19/2026*  
COORDINATOR R.C.E. 81047 DATE

DESIGN  
GUIDE NO. **SDSW: DG-200**