

Appendix A

Detailed Proposed Land Use and Trip Generation Tables

Existing Conditions (2008)

TAZ: 3232

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	10	-	124	-	9	/DU	1,116
1110	Single Family Detached over 20 DU/acre	1	-	21	-	9	/DU	189
1210	MF Residential less or equal 20 DU/acre	2	-	29	-	8	/DU	232
1220	MF Residential over 20 DU/acre	12	-	484	-	6	/DU	2,904
5006	Automobile Dealership	0	1,272	-	-	45	/ksf	57
5007	Arterial Commercial	2	47,732	-	-	40	/ksf	1,909
1190	Single Family Residential Without Units	0	-	-	-	-	-	-
4118	Road Right of Way	15	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	1	-	-	-	-	-	-

Totals: 44 49,004 658 - - - 6,408

TAZ: 3233

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	7	-	84	-	9	/DU	756
1110	Single Family Detached over 20 DU/acre	0	-	10	-	9	/DU	90
1210	MF Residential less or equal 20 DU/acre	1	-	16	-	8	/DU	128
1220	MF Residential over 20 DU/acre	13	-	499	-	6	/DU	2,994
5007	Arterial Commercial	5	58,833	-	-	40	/ksf	2,353
4114	Parking Lot - Surface	0	-	-	-	-	-	-
4118	Road Right of Way	12	-	-	-	-	-	-

Totals: 39 58,833 609 - - - 6,321

TAZ: 3261

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	5	-	52	-	9	/DU	468
1110	Single Family Detached over 20 DU/acre	0	-	5	-	9	/DU	45
1210	MF Residential less or equal 20 DU/acre	3	-	40	-	8	/DU	320
1220	MF Residential over 20 DU/acre	8	-	322	-	6	/DU	1,932
5006	Automobile Dealership	4	156,829	-	-	45	/ksf	7,057
5007	Arterial Commercial	2	40,895	-	-	40	/ksf	1,636
6002	Office (Low-Rise - less or equal to 100,000 SF)	1	15,261	-	-	Ln Formula	-	408
6102	Religious Facility (without day care)	1	10,148	-	-	5	/ksf	51
1190	Single Family Residential Without Units	0	-	-	-	-	-	-
4112	Freeway	4	-	-	-	-	-	-
4114	Parking Lot - Surface	0	-	-	-	-	-	-
4118	Road Right of Way	14	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0	-	-	-	-	-	-

Totals: 42 223,133 419 - - - 11,916

TAZ: 3285

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	4	-	42	-	9	/DU	378
1110	Single Family Detached over 20 DU/acre	0	-	3	-	9	/DU	27
1210	MF Residential less or equal 20 DU/acre	1	-	24	-	8	/DU	192
1220	MF Residential over 20 DU/acre	8	-	305	-	6	/DU	1,830
5006	Automobile Dealership	0	1,445	-	-	45	/ksf	65
5007	Arterial Commercial	4	113,080	-	-	40	/ksf	4,523
5009	Other Retail Trade and Strip Commercial	0	2,216	2	-	36	/ksf	80
6805	Junior High School or Middle School	12	152,393	-	587	1	/student	822
4112	Freeway	4	-	-	-	-	-	-
4114	Parking Lot - Surface	1	-	-	-	-	-	-
4118	Road Right of Way	12	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0	-	-	-	-	-	-

Totals:	46	269,134	376	587	-	-	-	7,917
---------	----	---------	-----	-----	---	---	---	-------

TAZ: 3286

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	9	-	105	-	9	/DU	945
1110	Single Family Detached over 20 DU/acre	0	-	13	-	9	/DU	117
1210	MF Residential less or equal 20 DU/acre	3	-	53	-	8	/DU	424
1220	MF Residential over 20 DU/acre	21	-	1,015	-	6	/DU	6,090
2103	Light Industry - General	0	2,400	1	-	15	/ksf	36
5006	Automobile Dealership	2	83,032	-	-	45	/ksf	3,736
5007	Arterial Commercial	4	141,271	3	-	40	/ksf	5,651
6002	Office (Low-Rise - less or equal to 100,000 SF)	0	8,740	-	-	Ln Formula	-	267
6102	Religious Facility (without day care)	1	26,987	-	-	5	/ksf	135
6509	Other Health Care	0	8,445	-	-	50	/ksf	422
6806	Elementary School	1	24,033	-	181	3	/student	525
7601	Park - Active	0	-	-	-	50	/ac	8
4112	Freeway	4	-	-	-	-	-	-
4114	Parking Lot - Surface	2	-	-	-	-	-	-
4118	Road Right of Way	28	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0	-	-	-	-	-	-

Totals:	78	294,908	1,190	181	-	-	-	18,357
---------	----	---------	-------	-----	---	---	---	--------

TAZ: 3302

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	9	-	116	-	9	/DU	1,044
1110	Single Family Detached over 20 DU/acre	1	-	17	-	9	/DU	153
1210	MF Residential less or equal 20 DU/acre	6	-	100	-	8	/DU	800
1220	MF Residential over 20 DU/acre	24	-	1,128	-	6	/DU	6,768
5007	Arterial Commercial	4	73,273	4	-	40	/ksf	2,931
5009	Other Retail Trade and Strip Commercial	0	4,995	-	-	36	/ksf	180
6002	Office (Low-Rise - less or equal to 100,000 SF)	1	98,468	-	-	Ln Formula	-	1,669
6102	Religious Facility (without day care)	0	6,076	-	-	5	/ksf	30
6806	Elementary School	5	69,436	-	690	3	/student	2,001
1290	Multi-Family Residential Without Units	0	-	-	-	-	-	-
4113	Communications and Utilities	2	52,908	-	-	-	-	-
4114	Parking Lot - Surface	0	-	-	-	-	-	-
4115	Parking Lot - Structure	1	-	-	-	-	-	-
4118	Road Right of Way	21	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0	-	-	-	-	-	-

Totals:	75	305,156	1,365	690	-	-	-	15,576
---------	----	---------	-------	-----	---	---	---	--------

TAZ: 3334

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	2	-	21	-	9	/DU	189
1110	Single Family Detached over 20 DU/acre	0	-	5	-	9	/DU	45
1210	MF Residential less or equal 20 DU/acre	1	-	15	-	8	/DU	120
1220	MF Residential over 20 DU/acre	8	-	493	-	6	/DU	2,958
5004	Neighborhood Shopping Center (30,000 SF or more)	2	-	-	-	720	/ac	1,288
5007	Arterial Commercial	3	92,896	3	-	40	/ksf	3,716
5009	Other Retail Trade and Strip Commercial	1	29,632	3	-	36	/ksf	1,067
6806	Elementary School	6	61,842	-	777	3	/student	2,253
7601	Park - Active	1	-	-	-	50	/ac	47
4112	Freeway	4	-	-	-	-	-	-
4114	Parking Lot - Surface	1	-	-	-	-	-	-
4118	Road Right of Way	12	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	1	-	-	-	-	-	-

Totals:

41	184,370	540	777	-	-	-	-	11,684
----	---------	-----	-----	---	---	---	---	--------

TAZ: 3363

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	22	-	207	-	9	/DU	1,863
1110	Single Family Detached over 20 DU/acre	1	-	30	-	9	/DU	270
1210	MF Residential less or equal 20 DU/acre	5	-	76	-	8	/DU	608
1220	MF Residential over 20 DU/acre	8	-	320	-	6	/DU	1,920
5006	Automobile Dealership	0	10,131	-	-	45	/ksf	456
5007	Arterial Commercial	2	54,494	4	-	40	/ksf	2,180
5009	Other Retail Trade and Strip Commercial	0	5,666	-	-	36	/ksf	204
6102	Religious Facility (without day care)	1	26,416	-	-	5	/ksf	132
6806	Elementary School	7	42,333	-	577	3	/student	1,673
7601	Park - Active	13	-	-	-	50	/ac	626
7603	Open Space Park or Preserve	2	-	-	-	5	/ac	10
1190	Single Family Residential Without Units	0	-	-	-	-	-	-
1290	Multi-Family Residential Without Units	0	-	-	-	-	-	-
4114	Parking Lot - Surface	0	-	-	-	-	-	-
4118	Road Right of Way	21	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	1	-	-	-	-	-	-

Totals:

84	139,040	637	577	-	-	-	-	9,942
----	---------	-----	-----	---	---	---	---	-------

TAZ: 3369

LU Code	Land Use	Lot Area (acre)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached less or equal 20 DU/acre	3	-	36	-	9	/DU	324
1110	Single Family Detached over 20 DU/acre	0	-	1	-	9	/DU	9
1210	MF Residential less or equal 20 DU/acre	2	-	28	-	8	/DU	224
1220	MF Residential over 20 DU/acre	10	-	462	-	6	/DU	2,772
5007	Arterial Commercial	4	96,091	-	-	40	/ksf	3,844
6001	Office (High-Rise - greater than 100,000 SF)	1	487,770	-	-	Ln Formula	-	5,594
6102	Religious Facility (without day care)	0	17,608	-	-	5	/ksf	88
6104	Post Office	0	6,500	-	-	168	/ksf	1,092
4112	Freeway	1	-	-	-	-	-	-
4114	Parking Lot - Surface	1	-	-	-	-	-	-
4118	Road Right of Way	13	-	-	-	-	-	-

Totals:

37	607,969	527	-	-	-	-	-	13,947
----	---------	-----	---	---	---	---	---	--------

	Lot Area (acre)	Floor Area (sf)	DU's	Number Students	Rate	Units	Trips
Total For Existing:	485.3	2,131,547	6,320	2,812	-	-	102,068

Adopted Community Plan (2035)

Legend:

For the Commercial/Mixed Use Land Uses, there are two rates that are applied in order to account for the commercial and residential trips generated:

Commercial Trips Generated = (Lot Area sf) x (0.04 Trips/sf) x (0.25 FAR)

Residential Trips Generated = (DU's) x (6 Trips/DU)

TAZ: 3232

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	10.4	-	124	-	9	/DU	1,116
1110	Single Family Detached (20+ du/ac)	0.9	-	21	-	9	/DU	189
1210	MF Residential (≤ 20 du/ac)	2.0	-	29	-	8	/DU	232
1220	MF Residential (20+ du/ac)	11.8	-	484	-	6	/DU	2,904
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	132	-	6	/DU	792
5007	Arterial Commercial (20+ du/ac) - Commercial	1.8	19,800	-	-	40	/ksf	792
5007	Arterial Commercial	1.2	32,855	-	-	40	/ksf	1,314
1190	Single Family Residential Without Units	0.04	-	-	-	-	-	-
4118	Road Right of Way	15.0	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.8	-	-	-	-	-	-

Totals:	44.0	52,655	790	-	-	-	-	7,339
---------	------	--------	-----	---	---	---	---	-------

TAZ: 3233

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	6.8	-	81	-	9	/DU	729
1110	Single Family Detached (20+ du/ac)	0.4	-	8	-	9	/DU	72
1210	MF Residential (≤ 20 du/ac)	1.2	-	18	-	8	/DU	144
1220	MF Residential (20+ du/ac)	13.3	-	501	-	6	/DU	3,006
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	171	-	6	/DU	1,026
5007	Arterial Commercial (20+ du/ac) - Commercial	3.9	41,937	-	-	40	/ksf	1,677
5007	Arterial Commercial	0.8	19,044	-	-	40	/ksf	762
4118	Road Right of Way	12.3	-	-	-	-	-	-

Totals:	38.7	60,981	779	-	-	-	-	7,416
---------	------	--------	-----	---	---	---	---	-------

TAZ: 3261

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	4.3	-	45	-	9	/DU	405
1110	Single Family Detached (20+ du/ac)	0.0	-	1	-	9	/DU	9
1210	MF Residential (≤ 20 du/ac)	2.8	-	44	-	8	/DU	352
1220	MF Residential (20+ du/ac)	7.7	-	313	-	6	/DU	1,878
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	2	-	6	/DU	12
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	172	-	6	/DU	1,032
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	0.1	1,211	-	-	40	/ksf	48
5007	Arterial Commercial (20+ du/ac) - Commercial	2.8	24,595	-	-	40	/ksf	984
5007	Arterial Commercial	1.3	34,229	-	-	40	/ksf	1,369
5006	Automobile Dealership	0.3	10,774	-	-	45	/ksf	485
6102	Religious Facility (without day care)	0.6	10,148	-	-	5	/ksf	51
7214	Racquetball/Tennis/Health Club	3.5	55,000	-	-	40	/ksf	2,200
1190	Single Family Residential Without Units	0.03	-	-	-	-	-	-
4112	Freeway	3.7	-	-	-	-	-	-
4114	Parking Lot - Surface	0.4	-	-	-	-	-	-
4118	Road Right of Way	13.7	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.3	-	-	-	-	-	-

Totals:	41.6	135,957	577	-	-	-	-	8,825
---------	------	---------	-----	---	---	---	---	-------

TAZ: 3285

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	3.8	-	42	-	9	/DU	378
1110	Single Family Detached (20+ du/ac)	0.05	-	1	-	9	/DU	9
1210	MF Residential (≤ 20 du/ac)	1.4	-	24	-	8	/DU	192
1220	MF Residential (20+ du/ac)	7.7	-	307	-	6	/DU	1,842
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	129	-	6	/DU	774
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Residential	-	-	2	-	8	/DU	16
5007	Arterial Commercial (20+ du/ac) - Commercial	2.6	27,805	-	-	40	/ksf	1,112
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Commercial	0.2	1,592	-	-	36	/ksf	57
5006	Automobile Dealership	0.3	1,445	-	-	45	/ksf	65
5007	Arterial Commercial	1.9	88,194	-	-	40	/ksf	3,528
5009	Other Retail Trade and Strip Commercial	0.1	624	-	-	36	/ksf	22
6805	Junior High School or Middle School	11.6	-	-	1,800	1.4	/Student	2,520
4112	Freeway	3.74	-	-	-	-	-	-
4114	Parking Lot - Surface	0.4	-	-	-	-	-	-
4118	Road Right of Way	11.6	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.3	-	-	-	-	-	-

45.8	119,660	505	1,800	-	-	-	10,516
------	---------	-----	-------	---	---	---	--------

TAZ: 3286

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	9.0	-	99	-	9	/DU	891
1110	Single Family Detached (20+ du/ac)	0.3	-	9	-	9	/DU	81
1210	MF Residential (≤ 20 du/ac)	3.8	-	59	-	8	/DU	472
1220	MF Residential (20+ du/ac)	21.3	-	1019	-	6	/DU	6,114
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	2	-	8	/DU	16
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	174	-	6	/DU	1,044
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	0.3	10,057	-	-	40	/ksf	402
5007	Arterial Commercial (20+ du/ac) - Commercial	2.6	28,806	-	-	40	/ksf	1,152
5006	Automobile Dealership	1.4	81,832	-	-	45	/ksf	3,682
5007	Arterial Commercial	2.4	115,521	-	-	40	/ksf	4,621
6002	Office (Low-Rise - less or equal to 100,000 SF)	0.3	8,740	-	-	formula	-	267
6102	Religious Facility (without day care)	1.3	26,987	-	-	5	/ksf	135
6509	Other Health Care	0.5	8,445	-	-	50	/ksf	422
6806	Elementary School	1.5	-	-	199	2.9	/Student	577
7601	Park - Active	0.2	-	-	-	50	/acre	8
4112	Freeway	4.0	-	-	-	-	-	-
4114	Parking Lot - Surface	1.3	-	-	-	-	-	-
4118	Road Right of Way	28.0	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.3	-	-	-	-	-	-

78.4	280,388	1,362	199	-	-	-	19,886
------	---------	-------	-----	---	---	---	--------

TAZ: 3302

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	8.9	-	108	-	9	/DU	972
1110	Single Family Detached (20+ du/ac)	0.7	-	15	-	9	/DU	135
1210	MF Residential (≤ 20 du/ac)	6.6	-	108	-	8	/DU	864
1220	MF Residential (20+ du/ac)	24.5	-	1130	-	6	/DU	6,780
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	46	-	6	/DU	276
5007	Arterial Commercial (20+ du/ac) - Commercial	1.6	17,793	-	-	40	/ksf	712
5007	Arterial Commercial	2.1	44,313	-	-	40	/ksf	1,773
6002	Office (Low-Rise - less or equal to 100,000 SF)	1.2	98,468	-	-	formula	-	1,669
6102	Religious Facility (without day care)	0.2	6,076	-	-	5	/ksf	30
6806	Elementary School	4.6	-	-	690	2.9	/Student	2,001
1290	Multi-Family Residential Without Units	0.1	-	-	-	-	-	-
4113	Communications and Utilities	1.9	-	-	-	-	-	-
4114	Parking Lot - Surface	0.2	-	-	-	-	-	-
4115	Parking Lot - Structure	1.1	-	-	-	-	-	-
4118	Road Right of Way	21.2	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.5	-	-	-	-	-	-

75.2	166,650	1,407	690	-	-	-	15,211
------	---------	-------	-----	---	---	---	--------

TAZ: 3334

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	1.6	-	19	-	9	/DU	171
1110	Single Family Detached (20+ du/ac)	0.1	-	3	-	9	/DU	27
1210	MF Residential (≤ 20 du/ac)	1.0	-	17	-	8	/DU	136
1220	MF Residential (20+ du/ac)	7.8	-	495	-	6	/DU	2,970
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	1	-	8	/DU	8
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	191	-	6	/DU	1,146
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Residential	-	-	2	-	8	/DU	16
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	0.2	7,702	-	-	40	/ksf	308
5007	Arterial Commercial (20+ du/ac) - Commercial	4.0	53,648	-	-	40	/ksf	2,146
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Commercial	0.3	1,012	-	-	36	/ksf	36
5007	Arterial Commercial	2.0	64,174	-	-	40	/ksf	2,567
5009	Other Retail Trade and Strip Commercial	0.4	21,798	-	-	36	/ksf	785
6007	Medical Office (less or equal to 100,000 SF)	0.5	39,400	-	-	50	/ksf	1,970
6806	Elementary School	5.6	-	-	1000	2.9	/Student	2,900
7600	Parks	0.1	-	-	-	50	/acre	6
7601	Park - Active	0.9	-	-	-	50	/acre	47
4112	Freeway	4.5	-	-	-	-	-	-
4118	Road Right of Way	11.5	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.1	-	-	-	-	-	-

40.6	187,734	728	1,000	-	-	-	15,240
------	---------	-----	-------	---	---	---	--------

TAZ: 3363

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	13.1	-	124	-	9	/DU	1,116
1110	Single Family Detached (20+ du/ac)	0.5	-	12	-	9	/DU	108
1210	MF Residential (≤ 20 du/ac)	10.5	-	148	-	8	/DU	1,184
1220	MF Residential (20+ du/ac)	8.7	-	338	-	6	/DU	2,028
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	46	-	8	/DU	368
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	23	-	6	/DU	138
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	4.2	46,215	-	-	40	/ksf	1,849
5007	Arterial Commercial (20+ du/ac) - Commercial	0.5	6,566	-	-	40	/ksf	263
5006	Automobile Dealership	0.5	10,131	-	-	45	/ksf	456
5007	Arterial Commercial	1.9	52,514	-	-	40	/ksf	2,101
5009	Other Retail Trade and Strip Commercial	0.3	5,666	-	-	36	/ksf	204
6102	Religious Facility (without day care)	1.1	26,416	-	-	5	/ksf	132
6806	Elementary School	7.0	-	-	630	2.9	/Student	1,827
7601	Park - Active	11.8	-	-	-	50	/acre	591
7603	Open Space Park or Preserve	2.0	-	-	-	5	/acre	10
1190	Single Family Residential Without Units	0.04	-	-	-	-	-	-
4114	Parking Lot - Surface	0.2	-	-	-	-	-	-
4118	Road Right of Way	21.2	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	0.3	-	-	-	-	-	-

83.9	147,508	691	630	-	-	-	12,373
------	---------	-----	-----	---	---	---	--------

TAZ: 3369

LU Code	Land Use	Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	3.3	-	36	-	9	/DU	324
1110	Single Family Detached (20+ du/ac)	0.02	-	1	-	9	/DU	9
1210	MF Residential (≤ 20 du/ac)	2.1	-	28	-	8	/DU	224
1220	MF Residential (20+ du/ac)	9.7	-	462	-	6	/DU	2,772
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	117	-	6	/DU	702
5007	Arterial Commercial (20+ du/ac) - Commercial	3.2	35,229	-	-	40	/ksf	1,409
5007	Arterial Commercial	2.0	64,248	-	-	40	/ksf	2,570
6001	Office (High-Rise - greater than 100,000 SF)	1.5	487,770	-	-	formula	-	5,594
6102	Religious Facility (without day care)	0.4	17,608	-	-	5	/ksf	88
4112	Freeway	1.0	-	-	-	-	-	-
4114	Parking Lot - Surface	0.5	-	-	-	-	-	-
4118	Road Right of Way	13.4	-	-	-	-	-	-

37.1	604,855	644	-	-	-	-	13,693
------	---------	-----	---	---	---	---	--------

Lot Area (ac)	Floor Area (sf)	DU's	Students	Rate	Units	Trips
485.3	1,756,388	7,483	4,319	-	-	110,499

Total For CP:

Proposed Land Use Plan (2035)

Legend:

Total CP Area: The area of each land use for the whole TAZ (for CP land uses)

CP Study Area: The area of each land use for only the study area being changed in the IBI Proposal (for CP land uses)

Proposed Study Area: The area of each land use for only the study area being changed in the IBI Proposal (for Proposed land uses)

Lot Area = (Total CP Area) - (CP Study Area) + (Proposed Study Area)

This equation calculates the Lot Area by overlaying the IBI Proposed Land Uses over the Community Plan Land Uses.

For the Commercial/Mixed Use Land Uses, there are two rates that are applied in order to account for the commercial and residential trips generated:

Commercial Trips Generated = (Lot Area sf) x (0.04 Trips/sf) x (0.25 FAR)

Residential Trips Generated = (DU's) x (6 Trips/DU)

TAZ: 3232

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	CP Study Floor Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	454,395	36,190	0	418,204	-	-	-	-	124	10	0	114	-	9	/DU	1,026
1110	Single Family Detached (20+ du/ac)	40,884	0	0	40,884	-	-	-	-	21	0	0	21	-	9	/DU	189
1210	MF Residential (≤ 20 du/ac)	85,353	13,311	0	72,042	-	-	-	-	29	5	0	24	-	8	/DU	192
1220	MF Residential (20+ du/ac)	515,326	93,258	73,664	495,732	-	-	-	-	484	74	51	461	-	6	/DU	2,764
5007	Arterial Commercial (20+ du/ac) - Residential	0	0	0	0	-	-	-	-	132	132	196	196	-	6	/DU	1,175
5007	Arterial Commercial (20+ du/ac) - Commercial	79,215	79,215	196,485	196,485	19,800	19,800	49,121	49,121	-	-	-	-	-	40	/ksf	1,965
5007	Arterial Commercial	51,193	51,193	0	0	32,855	32,855	0	0	-	-	-	-	-	40	/ksf	0
1190	Single Family Residential Without Units	1,753	0	0	1,753	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	651,769	0	0	651,769	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	36,711	3,563	0	33,148	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		1,916,598	-	-	1,910,017	-	-	-	49,121	-	-	-	816	-	-	-	7,312

TAZ: 3233

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	CP Study Floor Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	296,765	0	0	296,765	-	-	-	-	81	0	0	81	-	9	/DU	729
1110	Single Family Detached (20+ du/ac)	15,891	0	0	15,891	-	-	-	-	8	0	0	8	-	9	/DU	72
1210	MF Residential (≤ 20 du/ac)	51,769	4,505	37,167	84,431	-	-	-	-	18	2	17	33	-	8	/DU	265
1220	MF Residential (20+ du/ac)	579,512	45,041	0	534,471	-	-	-	-	501	43	0	458	-	6	/DU	2,748
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	-	-	-	-	-	-	171	20	26	177	-	6	/DU	1,064
5007	Arterial Commercial (20+ du/ac) - Commercial	171,521	19,143	38,342	190,719	41,937	4,785	9,585	46,737	-	-	-	-	-	40	/ksf	1,869
5007	Arterial Commercial	33,944	19,476	0	14,468	19,044	12,217	0	6,827	-	-	-	-	-	40	/ksf	273
4118	Road Right of Way	534,838	0	0	534,838	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		1,684,240	-	-	1,671,583	-	-	-	53,564	-	-	-	757	-	-	-	7,021

TAZ: 3261

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	CP Study Floor Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	185,444	67,951	0	117,493	-	-	-	-	45	15	0	30	-	9	/DU	270
1110	Single Family Detached (20+ du/ac)	1,861	0	0	1,861	-	-	-	-	1	0	0	1	-	9	/DU	9
1210	MF Residential (≤ 20 du/ac)	122,339	56,171	44,957	111,125	-	-	-	-	44	20	21	45	-	8	/DU	357
1220	MF Residential (20+ du/ac)	334,834	142,207	107,845	300,472	-	-	-	-	313	141	74	246	-	6	/DU	1,478
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	2	0	0	2	-	6	/DU	12
5007	Arterial Commercial (20+ du/ac) - Commercial	-	-	-	-	-	-	-	-	172	88	239	323	-	6	/DU	1,941
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	4,845	0	0	4,845	1,211	-	-	1,211	-	-	-	-	-	40	/ksf	48
5007	Arterial Commercial (20+ du/ac) - Commercial	121,434	70,395	253,759	304,798	24,595	17,597	63,440	70,438	-	-	-	-	-	40	/ksf	2,818
5007	Arterial Commercial	57,795	53,860	0	3,935	34,229	30,841	0	3,388	-	-	-	-	-	40	/ksf	136
5006	Automobile Dealership	11,175	11,175	0	0	10,774	10,774	0	-	-	-	-	-	-	45	/ksf	0
6102	Religious Facility (without day care)	26,998	0	0	26,998	10,148	-	-	10,148	-	-	-	-	-	5	/ksf	51
7214	Racquetball/Tennis/Health Club	151,695	0	0	151,695	55,000	-	-	55,000	-	-	-	-	-	40	/ksf	2,200
1190	Single Family Residential Without Units	1,427	1,427	0	0	-	-	-	-	-	-	-	-	-	-	-	-
4112	Freeway	161,973	0	0	161,973	-	-	-	-	-	-	-	-	-	-	-	-
4114	Parking Lot - Surface	17,679	17,679	0	0	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	596,950	0	0	596,950	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	14,009	14,009	0	0	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		1,810,458	-	-	1,782,145	-	-	-	140,185	-	-	-	647	-	-	-	9,319

TAZ: 3285

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	CP Study Floor Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	164,608	61,031	0	103,577	-	-	-	-	42	14	0	28	-	9	/DU	252
1110	Single Family Detached (20+ du/ac)	2,104	0	0	2,104	-	-	-	-	1	0	0	1	-	9	/DU	9
1210	MF Residential (≤ 20 du/ac)	61,929	14,302	41,984	89,611	-	-	-	-	24	6	19	37	-	8	/DU	298
1220	MF Residential (20+ du/ac)	336,574	57,322	0	279,252	-	-	-	-	307	41	0	266	-	6	/DU	1,596
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	129	75	203	257	-	6	/DU	1,544
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	2	2	0	0	-	8	/DU	0
5007	Arterial Commercial (20+ du/ac) - Commercial	111,236	55,880	175,368	230,724	27,805	13,959	43,842	57,678	-	-	-	-	-	40	/ksf	2,307
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Commercial	9,937	9,937	0	0	1,592	1,592	0	0	-	-	-	-	-	36	/ksf	0
5006	Automobile Dealership	14,964	0	0	14,964	1,445	0	0	1,445	-	-	-	-	-	45	/ksf	65
5007	Arterial Commercial	84,721	4,532	0	80,189	88,194	0	0	88,194	-	-	-	-	-	40	/ksf	3,528
5009	Other Retail Trade and Strip Commercial	4,759	4,759	0	0	624	624	0	0	-	-	-	-	-	36	/ksf	0
6805	Junior High School or Middle School	504,621	0	0	504,621	-	-	-	-	-	-	-	-	1,800	1	/Student	2,520
4112	Freeway	162,934	0	0	162,934	-	-	-	-	-	-	-	-	-	-	-	-
4114	Parking Lot - Surface	18,582	0	0	18,582	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	506,146	0	0	506,146	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	13,801	10,675	0	3,126	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		1,996,915	-	-	1,995,829	-	-	-	147,317	-	-	-	590	-	-	-	12,120

TAZ: 3286

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	CP Study Floor Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	391,033	74,429	0	316,604	-	-	-	-	99	19	0	80	-	9	/DU	720
1110	Single Family Detached (20+ du/ac)	13,948	0	0	13,948	-	-	-	-	9	0	0	9	-	9	/DU	81
1210	MF Residential (≤ 20 du/ac)	165,589	5,698	37,088	196,979	-	-	-	-	59	2	17	74	-	8	/DU	592
1220	MF Residential (20+ du/ac)	926,422	199,842	98,253	824,832	-	-	-	-	1,019	202	68	885	-	6	/DU	5,308
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	2	2	0	0	-	8	/DU	0
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	-	-	-	-	-	-	174	34	277	417	-	6	/DU	2,503
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	14,432	14,432	0	0	10,057	10,057	0	0	-	-	-	-	-	40	/ksf	0
5007	Arterial Commercial (20+ du/ac) - Commercial	115,252	30,877	271,426	355,801	28,806	7,717	67,857	88,946	-	-	-	-	-	40	/ksf	3,558
5006	Automobile Dealership	60,647	60,647	0	0	81,832	81,832	0	0	-	-	-	-	-	45	/ksf	0
5007	Arterial Commercial	106,449	31,827	0	74,622	115,521	25,797	0	89,724	-	-	-	-	-	40	/ksf	3,589
6002	Office (Low-Rise - less or equal to 100,000 SF)	12,195	12,195	12,195	12,195	8,740	8,740	3,049	3,049	-	-	-	-	-	formula	-	121
6102	Religious Facility (without day care)	58,033	0	0	58,033	26,987	0	0	26,987	-	-	-	-	-	5	/ksf	135
6509	Other Health Care	21,365	0	0	21,365	8,445	0	0	8,445	-	-	-	-	-	50	/ksf	422
6806	Elementary School	63,195	0	0	63,195	-	-	-	-	-	-	-	-	199	3	/Student	577
7601	Park - Active	6,963	0	0	6,963	-	-	-	-	-	-	-	-	-	50	/acre	8
4112	Freeway	172,918	0	0	172,918	-	-	-	-	-	-	-	-	-	-	-	-
4114	Parking Lot - Surface	56,958	12,392	0	44,566	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	1,218,430	0	0	1,218,430	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	11,966	5,270	0	6,696	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		2,845,226	-	-	3,387,148	-	-	-	217,150	-	-	-	1,465	-	-	-	17,613

TAZ: 3302

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	CP Study Floor Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	386,489	12,037	0	374,452	-	-	-	-	108	2	0	106	-	9	/DU	954
1110	Single Family Detached (20+ du/ac)	29,198	0	0	29,198	-	-	-	-	15	0	0	15	-	9	/DU	135
1210	MF Residential (≤ 20 du/ac)	289,515	35,552	92,510	346,473	-	-	-	-	108	11	37	134	-	8	/DU	1,075
1220	MF Residential (20+ du/ac)	1,066,577	154,028	0	912,549	-	-	-	-	1,130	163	0	967	-	6	/DU	5,802
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	0	0	10	10	-	6	/DU	59
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	-	-	-	-	-	-	46	14	108	140	-	6	/DU	839
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	0	0	21,357	21,357	0	0	5,339	5,339	-	-	-	-	-	40	/ksf	214
5007	Arterial Commercial (20+ du/ac) - Commercial	67,988	18,991	156,589	205,585	17,793	5,548	39,147	51,392	-	-	-	-	-	40	/ksf	2,056
5007	Arterial Commercial	89,650	58,610	0	31,040	44,313	17,590	0	26,723	-	-	-	-	-	40	/ksf	1,069
6002	Office (Low-Rise - less or equal to 100,000 SF)	53,852	0	0	53,852	98,468	0	0	98,468	-	-	-	-	-	formula	-	1,669
6102	Religious Facility (without day care)	7,365	0	0	7,365	6,076	0	0	6,076	-	-	-	-	-	5	/ksf	30
6806	Elementary School	199,900	0	0	199,900	-	-	-	-	-	-	-	-	690	3	/Student	2,001
1290	Multi-Family Residential Without Units	4,029	0	0	4,029	-	-	-	-	-	-	-	-	-	-	-	-
4113	Communications and Utilities	83,723	83,723	56,693	56,693	-	-	-	-	-	-	-	-	-	-	-	-
4114	Parking Lot - Surface	6,543	6,543	0	0	-	-	-	-	-	-	-	-	-	-	-	-
4115	Parking Lot - Structure	46,142	0	0	46,142	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	923,680	0	0	923,680	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	19,757	7,080	0	12,676	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		3,274,406	-	-	3,224,991	-	-	-	187,998	-	-	-	1,372	-	-	-	15,902

TAZ: 3334

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	Floor CP Study Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	68,397	13,848	0	54,549	-	-	-	-	19	4	0	15	-	9	/DU	135
1110	Single Family Detached (20+ du/ac)	5,443	0	0	5,443	-	-	-	-	3	0	0	3	-	9	/DU	27
1210	MF Residential (≤ 20 du/ac)	42,465	13,823	87,533	116,175	-	-	-	-	17	6	30	41	-	8	/DU	330
1220	MF Residential (20+ du/ac)	339,561	89,007	0	250,554	-	-	-	-	495	78	0	417	-	6	/DU	2,502
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	1	1	14	14	-	8	/DU	110
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	-	-	-	-	-	-	191	76	98	213	-	6	/DU	1,275
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	2	1	0	1	-	8	/DU	8
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	6,641	6,641	29,937	29,937	7,702	7,702	7,484	7,484	-	-	-	-	-	40	/ksf	299
5007	Arterial Commercial (20+ du/ac) - Commercial	174,828	101,026	116,850	190,652	53,648	25,253	29,213	57,608	-	-	-	-	-	40	/ksf	2,304
5009	Other Retail Trade and Strip Commercial (≤ 20 du/ac) - Commercial	12,528	6,799	0	5,729	1,012	1,012	0	0	-	-	-	-	-	36	/ksf	0
5007	Arterial Commercial	87,416	36,465	0	50,951	64,174	31,101	0	33,073	-	-	-	-	-	40	/ksf	1,323
5009	Other Retail Trade and Strip Commercial	16,805	0	0	16,805	21,798	0	0	21,798	-	-	-	-	-	36	/ksf	785
6007	Medical Office (less or equal to 100,000 SF)	23,117	0	0	23,117	39,400	0	0	39,400	-	-	-	-	-	50	/ksf	1,970
6806	Elementary School	244,059	0	0	244,059	-	-	-	-	-	-	-	-	1,000	3	/Student	2,900
7600	Parks	5,348	0	0	5,348	-	-	-	-	-	-	-	-	-	50	/acre	6
7601	Park - Active	41,359	0	0	41,359	-	-	-	-	-	-	-	-	-	50	/acre	47
4112	Freeway	194,707	0	0	194,707	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	502,382	0	0	502,382	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	4,016	0	0	4,016	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		1,769,072	-	-	1,735,782	-	-	-	159,363	-	-	-	704	-	-	-	14,022

TAZ: 3363


LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	Floor CP Study Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	569,696	37,751	0	531,945	-	-	-	-	124	8	0	116	-	9	/DU	1,044
1110	Single Family Detached (20+ du/ac)	22,833	0	0	22,833	-	-	-	-	12	0	0	12	-	9	/DU	108
1210	MF Residential (≤ 20 du/ac)	456,529	80,393	131,176	507,312	-	-	-	-	148	31	47	164	-	8	/DU	1,312
1220	MF Residential (20+ du/ac)	380,043	186,312	0	193,731	-	-	-	-	338	177	0	161	-	6	/DU	966
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	46	0	20	66	-	8	/DU	524
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	-	-	-	-	-	-	23	23	251	251	-	6	/DU	1,509
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	184,861	0	42,604	227,465	46,215	0	10,651	56,866	-	-	-	-	-	40	/ksf	2,275
5007	Arterial Commercial (20+ du/ac) - Commercial	21,841	21,841	274,028	274,028	6,566	6,566	68,507	68,507	-	-	-	-	-	40	/ksf	2,740
5006	Automobile Dealership	21,377	21,377	0	0	10,131	10,131	0	0	-	-	-	-	-	45	/ksf	0
5007	Arterial Commercial	81,878	81,878	0	0	52,514	52,514	0	0	-	-	-	-	-	40	/ksf	0
5009	Other Retail Trade and Strip Commercial	13,774	13,774	0	0	5,666	5,666	0	0	-	-	-	-	-	36	/ksf	0
6102	Religious Facility (without day care)	48,640	20,672	0	27,968	26,416	5,912	0	20,504	-	-	-	-	-	5	/ksf	103
6806	Elementary School	306,748	0	0	306,748	-	-	-	-	-	-	-	-	630	3	/Student	1,827
7601	Park - Active	514,680	0	0	514,680	-	-	-	-	-	-	-	-	-	50	/acre	591
7603	Open Space Park or Preserve	85,762	0	0	85,762	-	-	-	-	-	-	-	-	-	5	/acre	10
1190	Single Family Residential Without Units	1,624	0	0	1,624	-	-	-	-	-	-	-	-	-	-	-	-
4114	Parking Lot - Surface	7,129	7,129	0	0	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	924,683	0	0	924,683	-	-	-	-	-	-	-	-	-	-	-	-
9101	Vacant and Undeveloped Land	13,459	6,806	0	6,652	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		3,655,557	-	-	3,625,430	-	-	-	145,877	-	-	-	770	-	-	-	13,008

TAZ: 3369

LU Code	Land Use	Total CP Area (sf)	CP Study Area (sf)	Proposed Study Area (sf)	Total Proposed Lot Area (sf)	Total CP Floor Area (sf)	Floor CP Study Area (sf)	Proposed Study Floor Area (sf)	Total Proposed Floor Area (sf)	Total CP DU's	CP Study DU's	Proposed DU's	Total Proposed DU's	Students	Rate	Units	Trips
1110	Single Family Detached (≤ 20 du/ac)	144,213	31,239	0	112,973	-	-	-	-	36	6	0	30	-	9	/DU	270
1110	Single Family Detached (20+ du/ac)	874	0	0	874	-	-	-	-	1	0	0	1	-	9	/DU	9
1210	MF Residential (≤ 20 du/ac)	90,222	5,244	77,762	162,739	-	-	-	-	28	2	27	53	-	8	/DU	423
1220	MF Residential (20+ du/ac)	422,463	108,398	0	314,065	-	-	-	-	462	117	0	345	-	6	/DU	2,070
5007	Arterial Commercial (≤ 20 du/ac) - Residential	-	-	-	-	-	-	-	-	0	0	18	18	-	8	/DU	146
5007	Arterial Commercial (20+ du/ac) - Residential	-	-	-	-	-	-	-	-	117	90	191	218	-	6	/DU	1,308
5007	Arterial Commercial (≤ 20 du/ac) - Commercial	0	0	39,815	39,815	0	0	9,954	9,954	-	-	-	-	-	40	/ksf	398
5007	Arterial Commercial (20+ du/ac) - Commercial	140,938	114,042	209,920	236,817	35,229	28,506	52,480	59,203	-	-	-	-	-	40	/ksf	2,368
5007	Arterial Commercial	87,755	67,759	0	19,996	64,248	45,649	0	18,599	-	-	-	-	-	40	/ksf	744
6001	Office (High-Rise - greater than 100,000 SF)	64,457	0	0	64,457	487,770	0	0	487,770	-	-	-	-	-	formula	-	5,594
6102	Religious Facility (without day care)	18,310	18,310	0	0	17,608	17,608	0	0	-	-	-	-	-	5	/ksf	0
4112	Freeway	41,475	0	0	41,475	-	-	-	-	-	-	-	-	-	-	-	-
4114	Parking Lot - Surface	21,999	10,030	0	11,968	-	-	-	-	-	-	-	-	-	-	-	-
4118	Road Right of Way	582,133	0	0	582,133	-	-	-	-	-	-	-	-	-	-	-	-
Totals:		1,614,838	-	-	1,587,312	-	-	-	575,526	-	-	-	665	-	-	-	13,331


Appendix B

Base Year, 2035, and Proposed Model Output

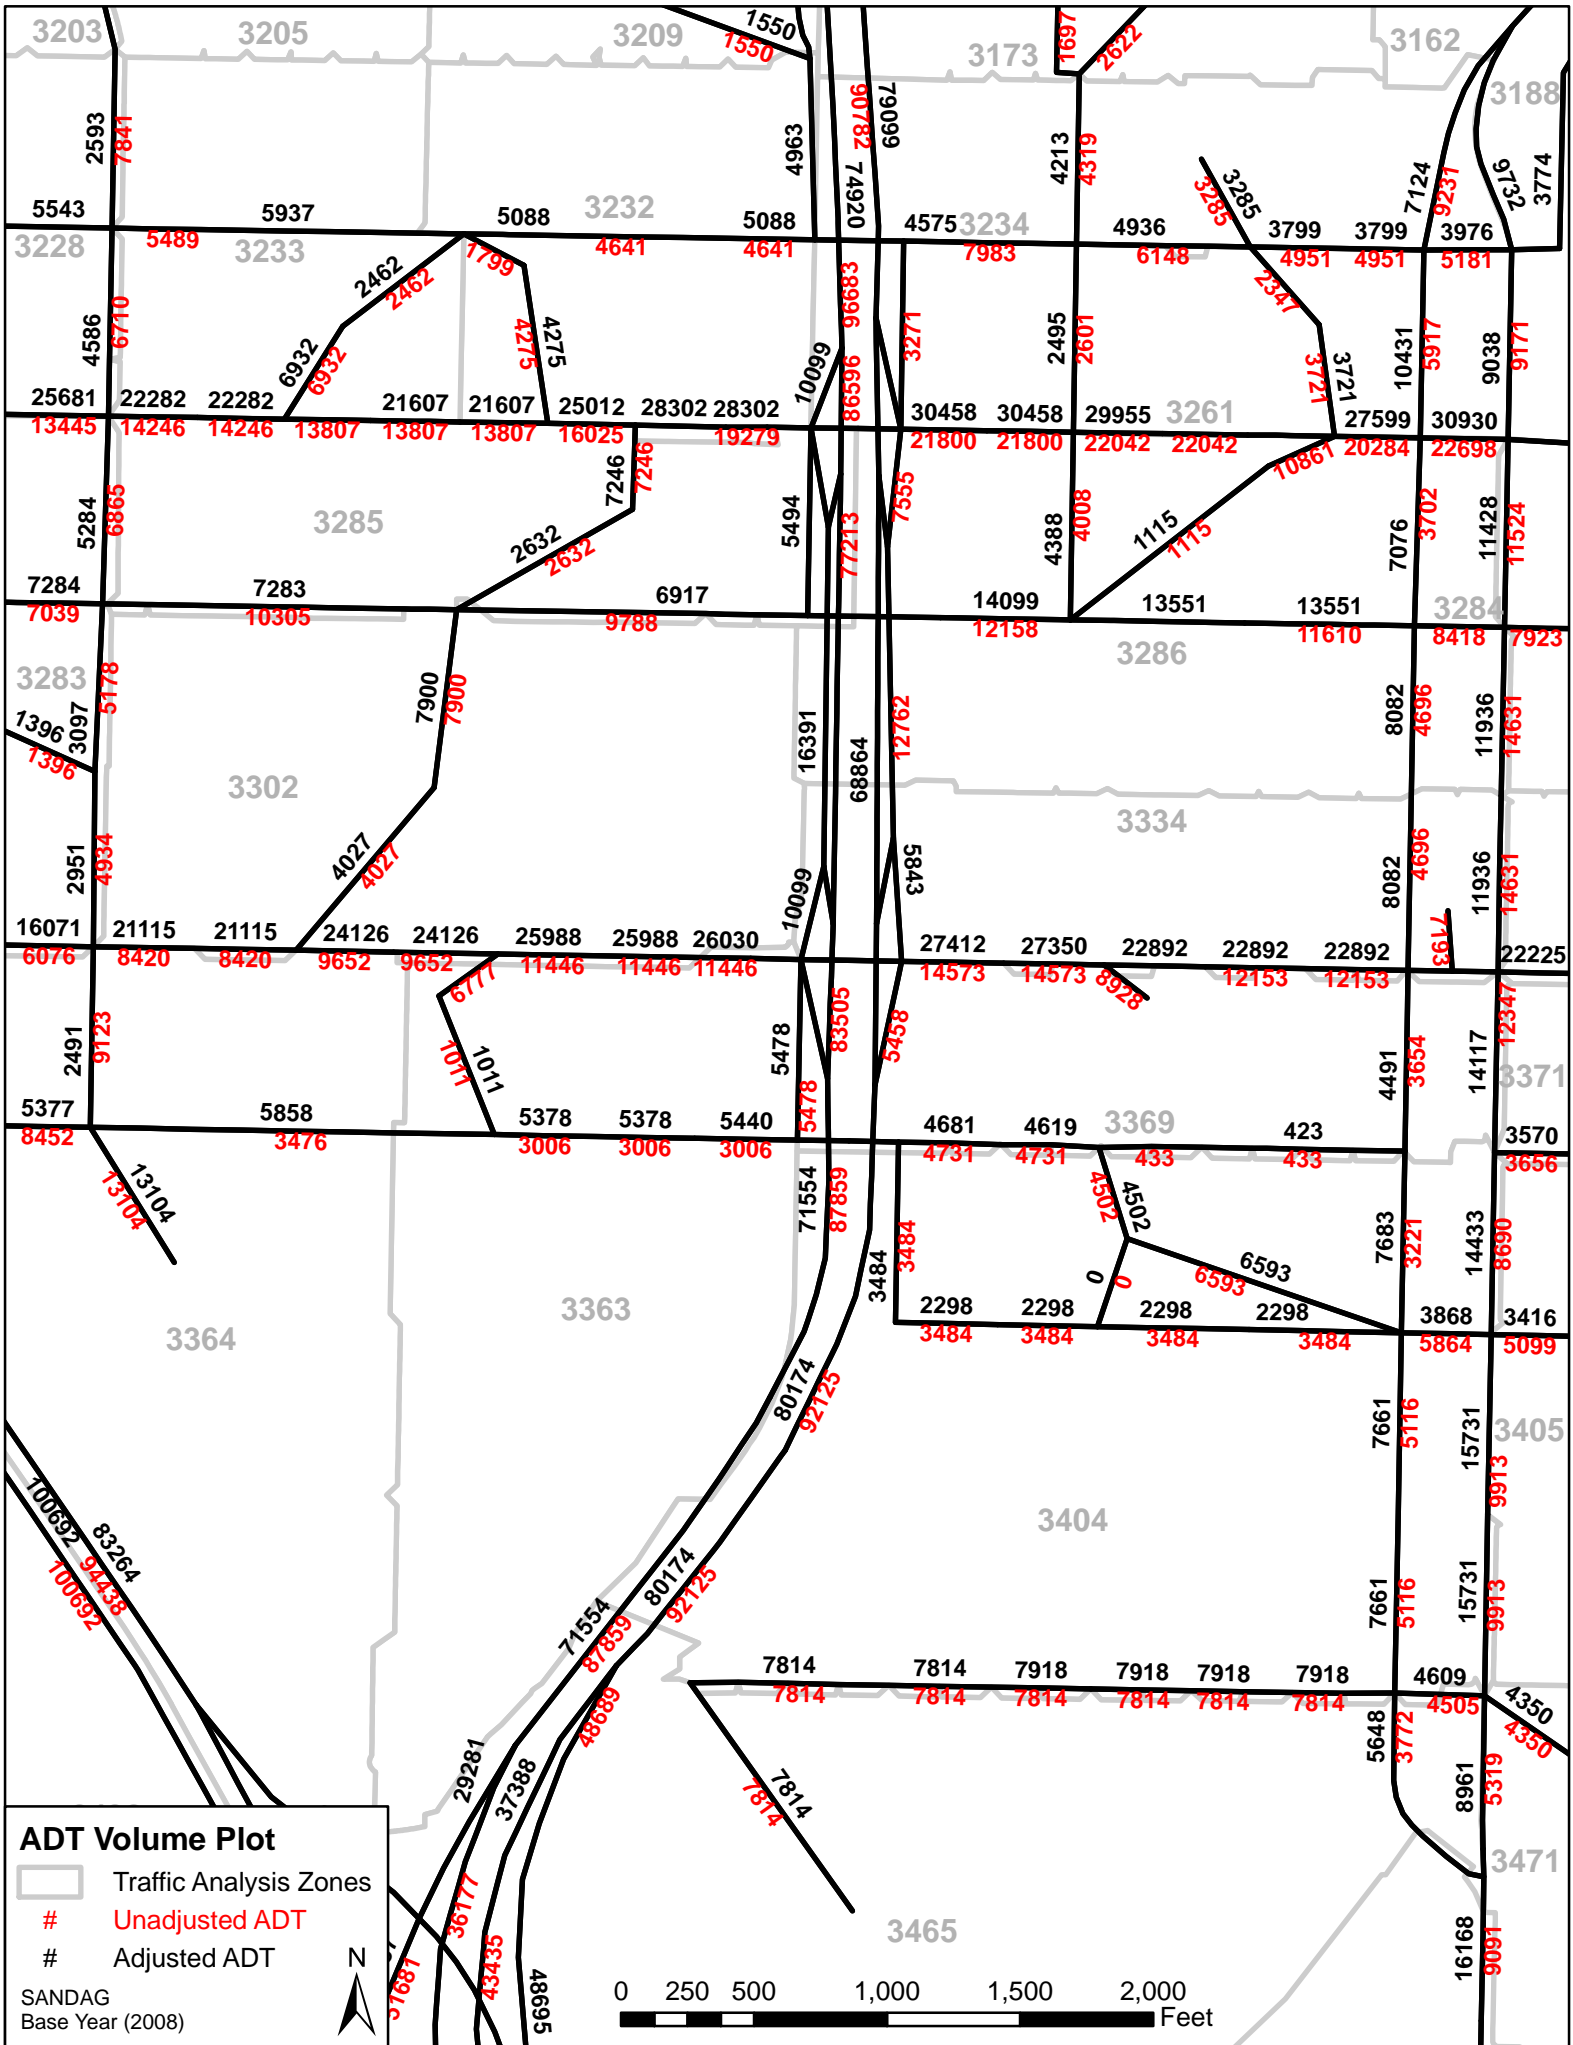


ADT Volume Plot

- Traffic Analysis Zones
- # Unadjusted ADT
- # Adjusted ADT



SANDAG
Base Year (2008)

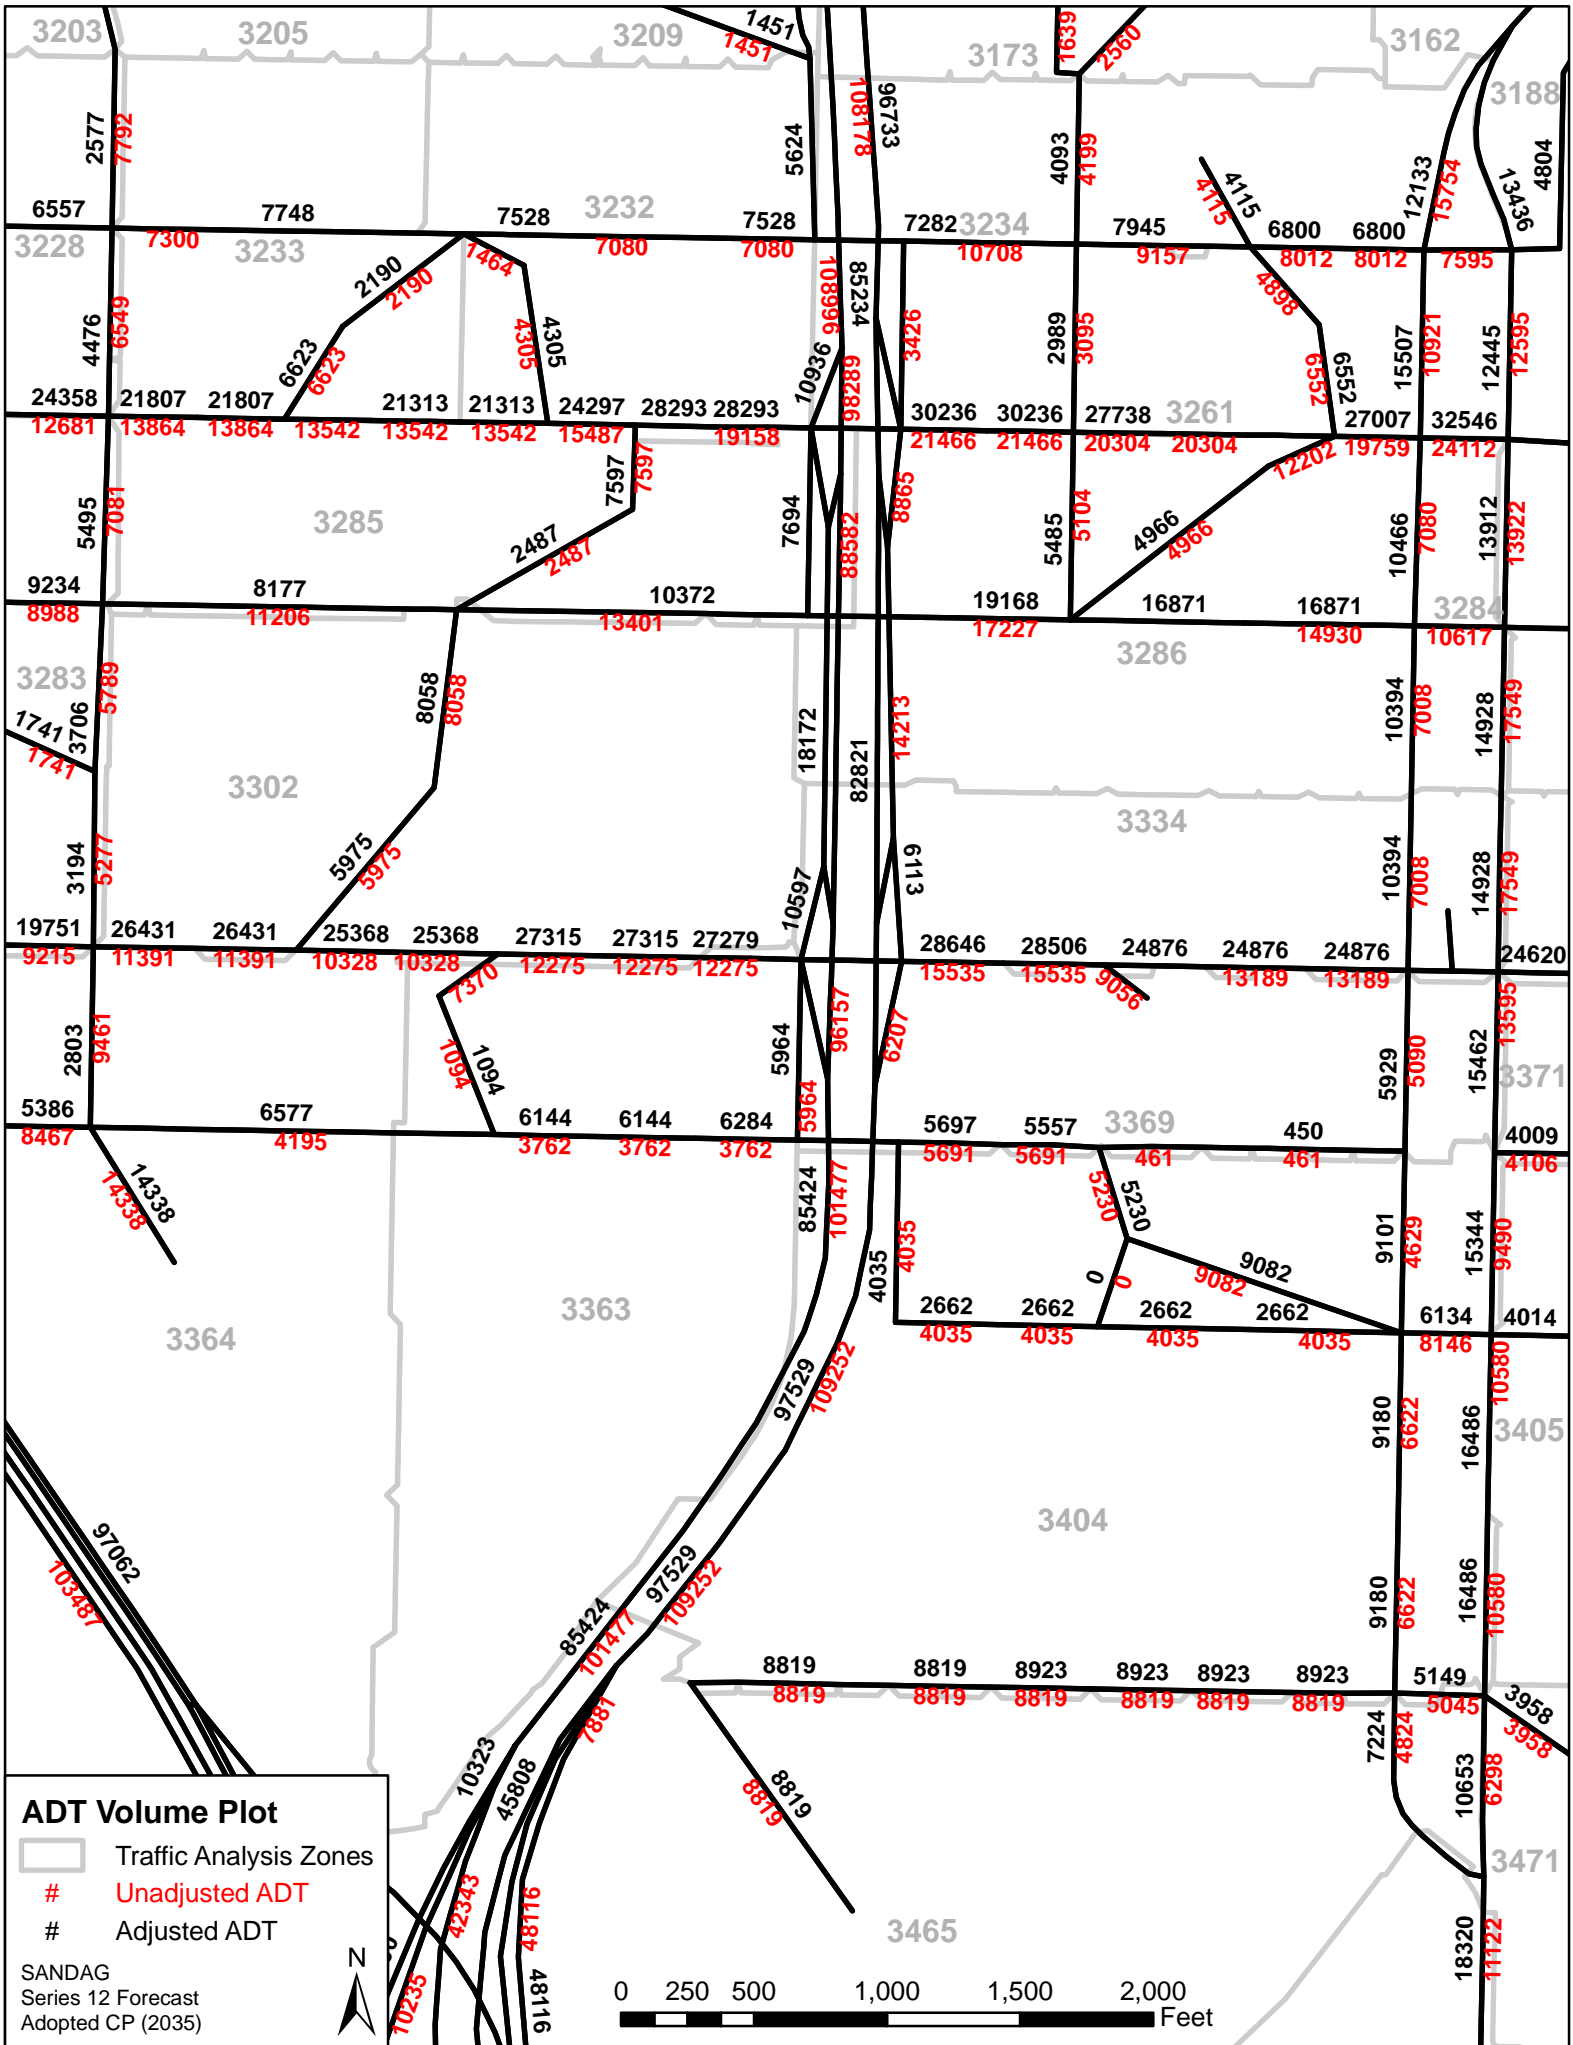

SANDAG
Series 12 Forecast
2011 RTP

ADT Volume Plot

Functional Classifications

- Freeway
- Prime
- Major
- Collector
- Light Collector
- Rural Collector
- Local
- Freeway Ramp
- Local Ramp
- Zone Connector


Traffic Analysis Zones

Unadjusted ADT(x1000)


Adjusted ADT(x1000)

Portions of this map contain information from the San Diego Association of Governments (SANDAG) Regional Information System. This product cannot be reproduced without the written permission of SANDAG.

SAN DIEGO ASSOCIATION OF GOVERNMENTS
401 B STREET, SUITE 800
SAN DIEGO, CALIFORNIA 92101 USA
(619) 499-1100
E-mail: sandag@sandag.org
Web site: www.sandag.org

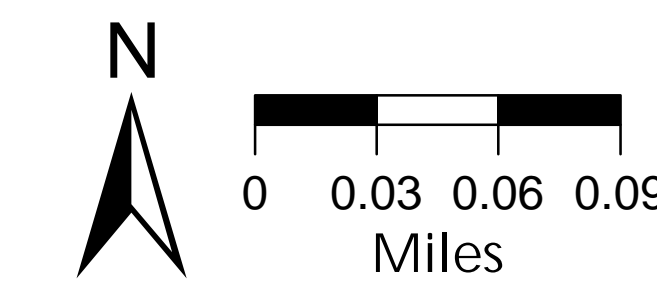

May 14, 2012

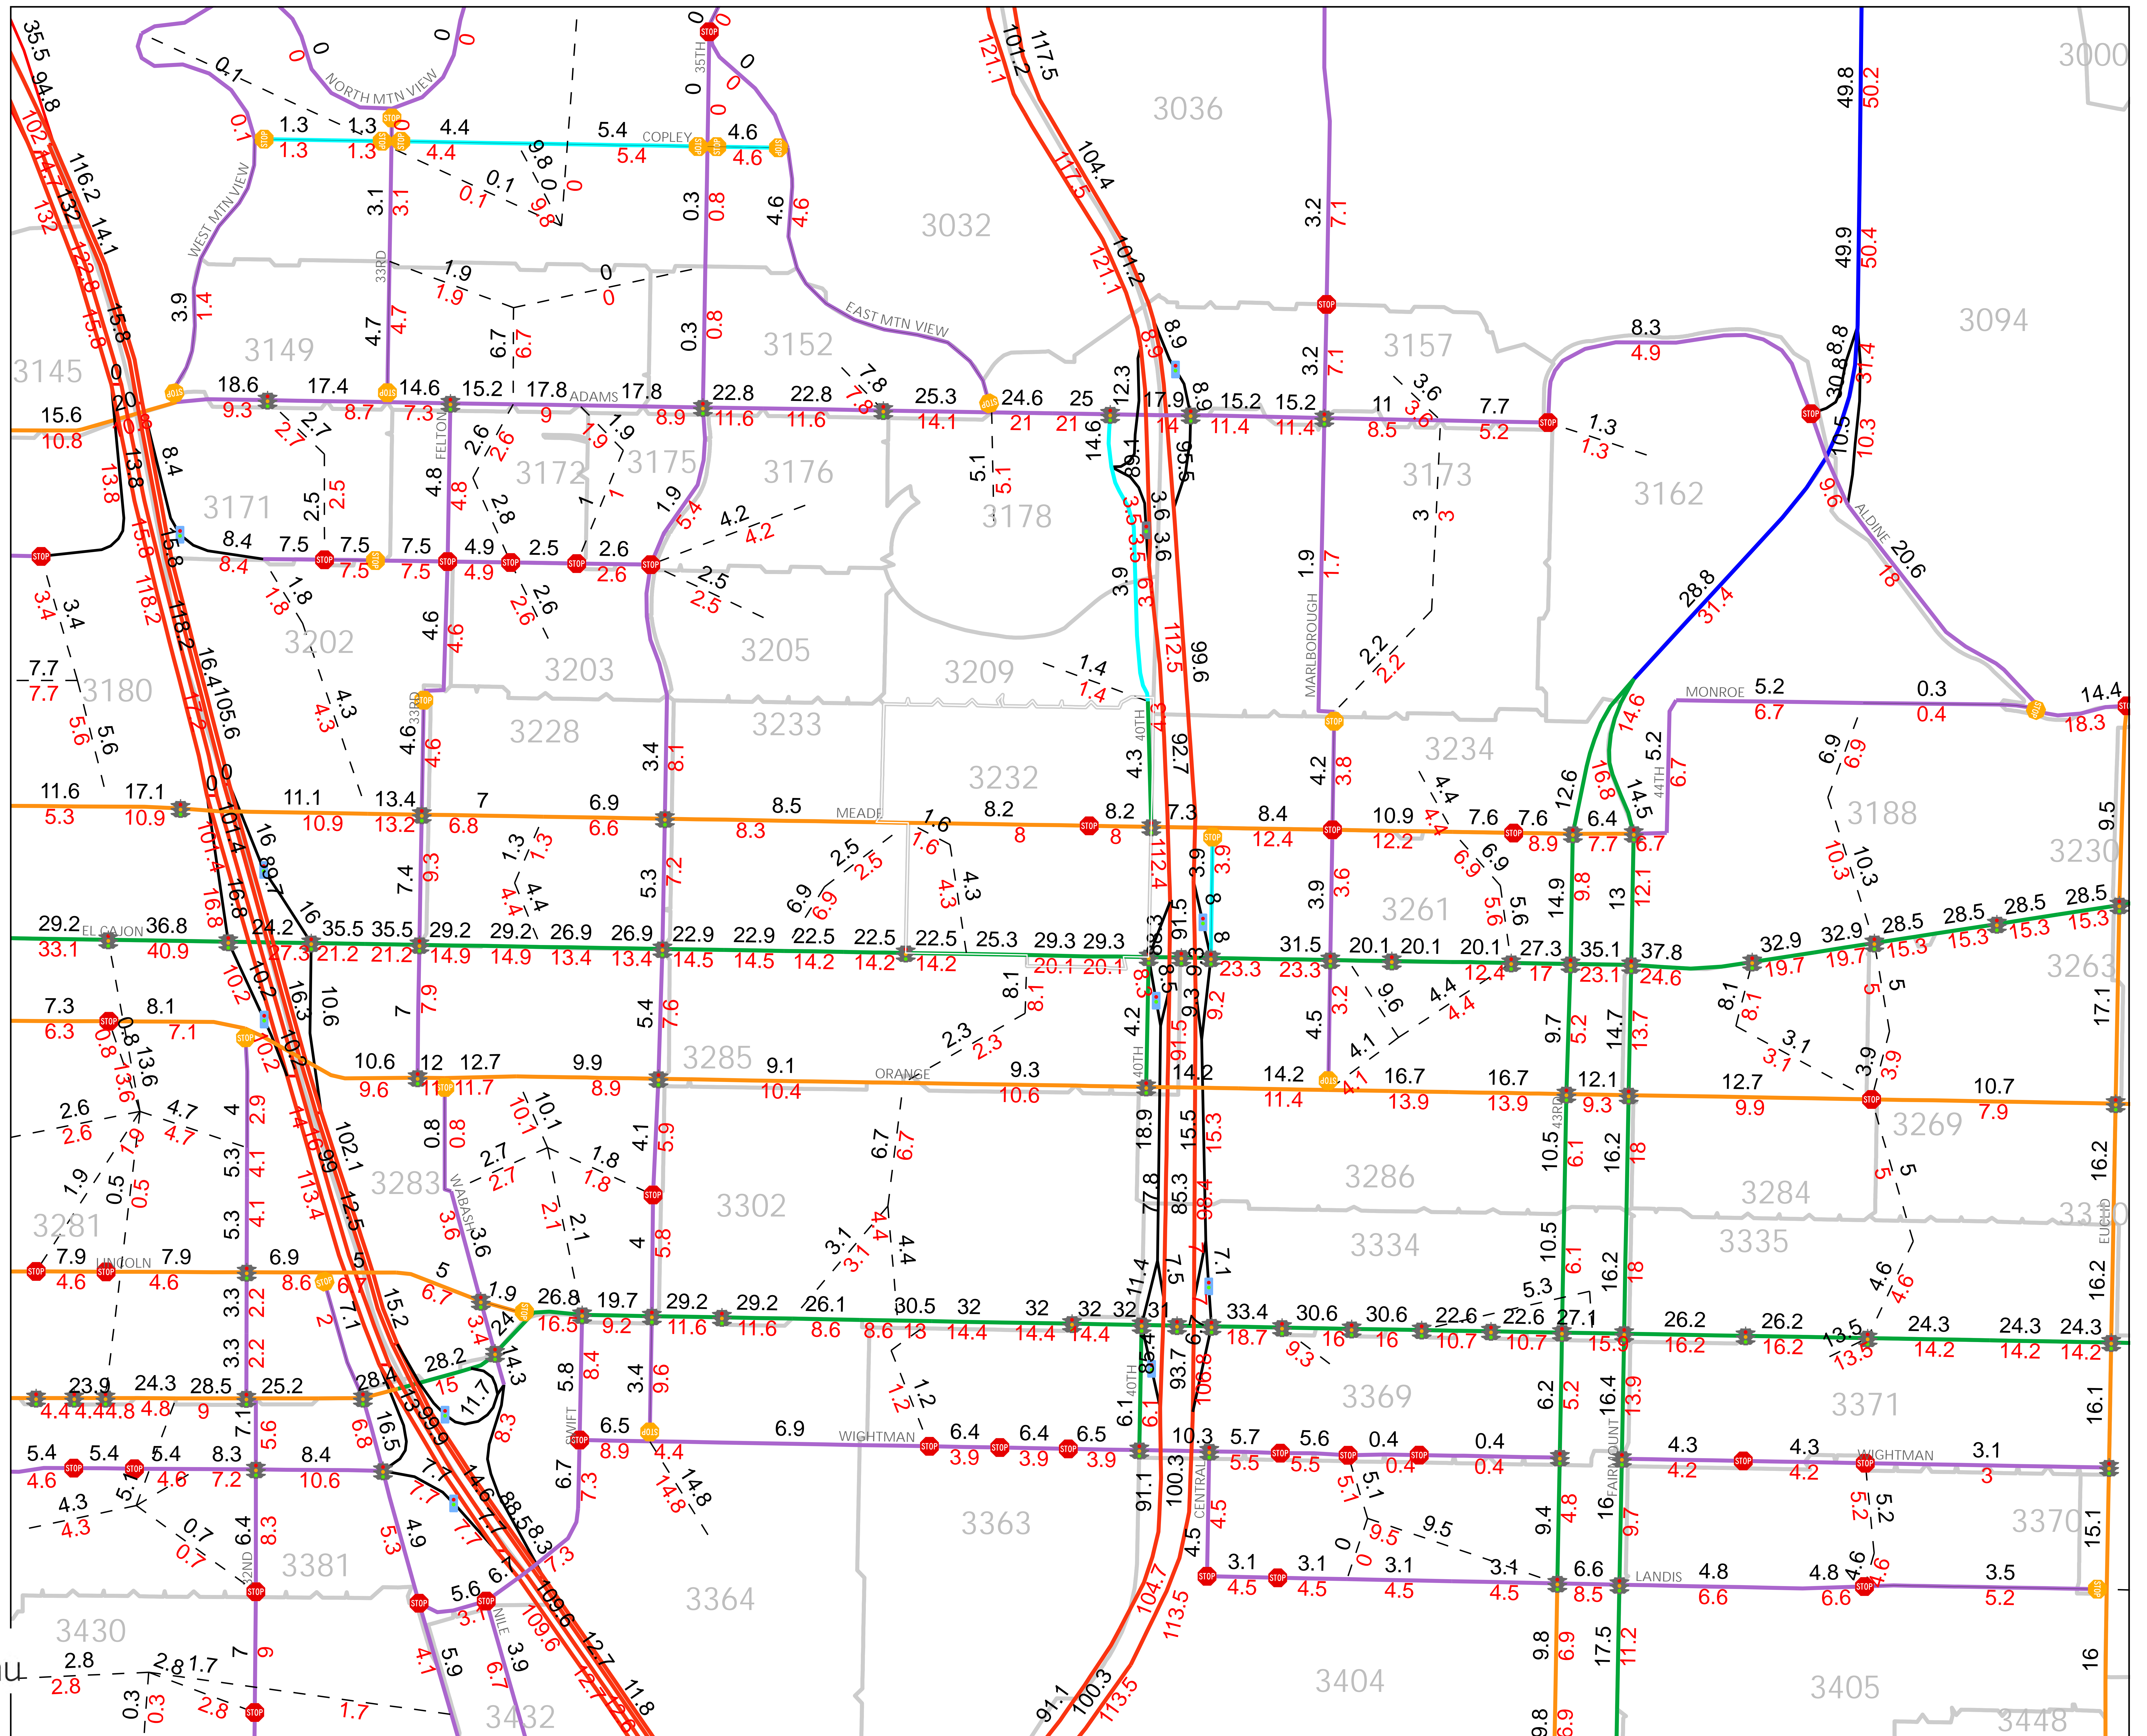

Appendix C

Recommended Forecast ADT Volume Adjustments

Roadway Segment	MAUREEN'S SUGGESTED Approximate Range of Future Volumes to use for MidCity BRT SAS
El Cajon Bl (37th - SR 15)	28K - 30K
El Cajon Bl (SR 15 - Marlborough)	38K - 40K
Orange Ave (Cherokee Av W - 39th)	9.5K
Orange Ave (42 St W - 42 St E)	13K
University Ave (39th St - SR 15)	27K - 29K
University Av (SR-15 SB - SR 15 NB)	
University Ave (SR 15 - Marlborough)	33K

Source: City of San Diego

Roadway Segment	City Traffic counts												MCSAP		SANDAG Forecasts from Website			Metro Center Traffic Study (2002) Buildout volumes	For discussion Future volumes - ACP	For discussion Future volumes Proposed MCSAP					
													Average past counts	Historical High Count	MCSAP Future volumes used in 6-2012 Study for ACP (Pre-Land Use Assumption Modifications)	MCSAP Future volumes used in 6-2012 Study for Proposed Scenario = Adjusted Sr 12 2035 MCSAP Forecast Volume (Pre-Land Use Assumption Modifications)	Series 11 2030 adjusted (not calibrated)					Series 12 2035 adjusted (not calibrated)	Series 12 2050 adjusted (not calibrated)		
El Cajon Bl (37th - SR 15)	23,030	2002	23,370	2006	24,700	2007	24,025	2009	21,715	2010	21,700	2012		23,090	24,700	28,300	29,300	31,000	29,600	32,000	27,710 but west of 39th	ok	ok		
El Cajon Bl (SR 15 - Marlborough)	29,640	2002	30,760	2002	35,800	2005	26,990	2008	31,945	2011				31,027	35,800	30,200	31,500	42,000	30,900	33,900	35,710	low	low	38-40K	
Orange Ave (Cherokee Av W - 39th)			7,930	2000	7,180	2004	7,300	2007	7,360	2010				7,443	7,930		9,300	11,000	10,800	12,600	9,565		ok		
Orange Ave (42 St W - 42 St E)									9,870	2010				9,870	9,870		14,200	20,000	20,600	22,700		high	high	13K	
University Ave (39th St - SR 15)					23,700	2004								23,700	23,700	27,300	32,000	25,000	28,200	29,400	19,625 but west of 39th	ok	high 29K	why is proposed so much higher - may not be worth answering since these were the premodified traffic volumes	
University Av (SR-15 SB - SR 15 NB)							27,785	2009	26,500	2012				27,143	27,785			26,000	26,600	29,200					
University Ave (SR 15 - Marlborough)	25,900	1990	22,500	1991	23,700	2004	32,370	2002	29,260	2004	27,120	2007	27,620	2010	26,924	32,370	28,600	33,400	34,000	30,400	33,200	24,325 but probably east	low 33K	ok	why is proposed so much higher - may not be worth answering since these were the premodified traffic volumes
Source: City of San Diego																									

Appendix D

City of San Diego Traffic Impact Study Roadway Classification and LOS Table

TABLE 2
Roadway Classifications, Levels of Service (LOS)
and Average Daily Traffic (ADT)

STREET CLASSIFICATION	LANES	CROSS SECTIONS	LEVEL OF SERVICE				
			A	B	C	D	E
Freeway	8 lanes		60,000	84,000	120,000	140,000	150,000
Freeway	6 lanes		45,000	63,000	90,000	110,000	120,000
Freeway	4 lanes		30,000	42,000	60,000	70,000	80,000
Expressway	6 lanes	102/122	30,000	42,000	60,000	70,000	80,000
Primary Arterial	6 lanes	102/122	25,000	35,000	50,000	55,000	60,000
Major Arterial	6 lanes	102/122	20,000	28,000	40,000	45,000	50,000
Major Arterial	4 lanes	78/98	15,000	21,000	30,000	35,000	40,000
Collector	4 lanes	72/92	10,000	14,000	20,000	25,000	30,000
Collector (no center lane) continuous left-turn lane)	4 lanes 2 lanes	64/84 50/70	5,000	7,000	10,000	13,000	15,000
Collector (no fronting property)	2 lanes	40/60	4,000	5,500	7,500	9,000	10,000
Collector (commercial-industrial fronting)	2 lanes	50/70	2,500	3,500	5,000	6,500	8,000
Collector (multifamily)	2 lanes	40/60	2,500	3,500	5,000	6,500	8,000
Sub-Collector (single-family)	2 lanes	36/56	—	—	2,200	—	—

LEGEND:

XXX/XXX = Curb to curb width (feet)/right-of-way width (feet): based on the City of San Diego Street Design Manual

XX/XXX= Approximate recommended ADT based on the City of San Diego Street Design Manual.

NOTES:

1. The volumes and the average daily level of service listed above are only intended as a general planning guideline.
2. Levels of service are not applied to residential streets since their primary purpose is to serve abutting lots, not carry through traffic. Levels of service normally apply to roads carrying through traffic between major trip generators and attractors.

Appendix E


2035 Adopted Community Plan

Scenario – Synchro Sheets (Intersection & Queue)

Queues

1: El Cajon & 37th

1/29/2013




Lane Group	EBL	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	33	696	837	195	142
v/c Ratio	0.22	0.26	0.35	0.34	0.28
Control Delay	37.2	11.9	17.1	14.0	14.9
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	37.2	11.9	17.1	14.0	14.9
Queue Length 50th (ft)	16	73	93	46	37
Queue Length 95th (ft)	41	98	161	92	76
Internal Link Dist (ft)		109	1248	382	134
Turn Bay Length (ft)	100				
Base Capacity (vph)	179	2682	2380	674	599
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.18	0.26	0.35	0.29	0.24

Intersection Summary

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th

1/29/2013



Movement	EBU	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations		↔	↑↑↑			↑↑↑			↔			↔
Volume (vph)	10	20	610	30	0	740	30	50	60	70	70	30
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.4	4.9			4.9			4.9			4.9
Lane Util. Factor		1.00	0.91			0.91			1.00			1.00
Frt		1.00	0.99			0.99			0.95			0.97
Flt Protected		0.95	1.00			1.00			0.99			0.97
Satd. Flow (prot)		1770	5049			5055			1741			1757
Flt Permitted		1.00	1.00			1.00			0.89			0.79
Satd. Flow (perm)		1863	5049			5055			1565			1419
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	11	22	663	33	0	804	33	54	65	76	76	33
RTOR Reduction (vph)	0	0	6	0	0	5	0	0	32	0	0	15
Lane Group Flow (vph)	0	33	690	0	0	832	0	0	163	0	0	127
Turn Type	custom	Prot					Perm			Perm		Perm
Protected Phases		5	2			6			8			4
Permitted Phases	5						8				4	
Actuated Green, G (s)		3.1	42.4			34.9			27.8			27.8
Effective Green, g (s)		3.1	42.4			34.9			27.8			27.8
Actuated g/C Ratio		0.04	0.53			0.44			0.35			0.35
Clearance Time (s)		4.4	4.9			4.9			4.9			4.9
Vehicle Extension (s)		2.0	1.0			1.0			2.0			2.0
Lane Grp Cap (vph)		72	2676			2205			544			493
v/s Ratio Prot			0.14			c0.16						
v/s Ratio Perm		c0.02							c0.10			0.09
v/c Ratio		0.46	0.26			0.38			0.30			0.26
Uniform Delay, d1		37.6	10.2			15.2			19.0			18.7
Progression Factor		1.00	1.00			1.00			1.00			1.00
Incremental Delay, d2		1.7	0.2			0.5			0.1			0.1
Delay (s)		39.3	10.5			15.7			19.1			18.8
Level of Service		D	B			B			B			B
Approach Delay (s)			11.8			15.7			19.1			18.8
Approach LOS			B			B			B			B
Intersection Summary												
HCM Average Control Delay			14.8			HCM Level of Service			B			
HCM Volume to Capacity ratio			0.35									
Actuated Cycle Length (s)			80.0			Sum of lost time (s)			14.2			
Intersection Capacity Utilization			46.5%			ICU Level of Service			A			
Analysis Period (min)			15									
c	Critical Lane Group											

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th


1/29/2013

Movement	SBR
Lane Configurations	
Volume (vph)	30
Ideal Flow (vphpl)	1900
Total Lost time (s)	
Lane Util. Factor	
Frts	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Peak-hour factor, PHF	0.92
Adj. Flow (vph)	33
RTOR Reduction (vph)	0
Lane Group Flow (vph)	0
Turn Type	
Protected Phases	
Permitted Phases	
Actuated Green, G (s)	
Effective Green, g (s)	
Actuated g/C Ratio	
Clearance Time (s)	
Vehicle Extension (s)	
Lane Grp Cap (vph)	
v/s Ratio Prot	
v/s Ratio Perm	
v/c Ratio	
Uniform Delay, d1	
Progression Factor	
Incremental Delay, d2	
Delay (s)	
Level of Service	
Approach Delay (s)	
Approach LOS	
Intersection Summary	

Queues

2: El Cajon & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	1054	348	641	1217	413	200	180
v/c Ratio	0.85	0.72	1.06	0.42	0.38	0.36	0.35
Control Delay	48.3	21.7	100.6	20.0	28.6	25.5	19.1
Queue Delay	0.3	0.0	429.8	1.4	0.2	0.0	0.0
Total Delay	48.6	21.7	530.4	21.4	28.7	25.5	19.1
Queue Length 50th (ft)	200	62	~494	170	109	91	58
Queue Length 95th (ft)	241	172	#721	224	152	157	121
Internal Link Dist (ft)	1248			230		598	
Turn Bay Length (ft)		100			200		
Base Capacity (vph)	1245	486	603	2925	1101	557	519
Starvation Cap Reductn	0	0	288	1433	0	0	0
Spillback Cap Reductn	18	0	0	0	160	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.86	0.72	2.03	0.82	0.44	0.36	0.35

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

2: El Cajon & SR 15 SB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↗	↘	↑↑↑					↖	↗	↘
Volume (vph)	0	970	320	590	1120	0	0	0	0	380	120	230
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Lane Util. Factor		0.86	1.00	1.00	0.91					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.94	1.00	1.00					1.00	0.99	0.98
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.99	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.95	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		6408	1496	1770	5085					3401	1662	1467
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		6408	1496	1770	5085					3401	1662	1467
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	1054	348	641	1217	0	0	0	0	413	130	250
RTOR Reduction (vph)	0	0	195	0	0	0	0	0	0	0	18	44
Lane Group Flow (vph)	0	1054	153	641	1217	0	0	0	0	413	182	136
Confl. Peds. (#/hr)			10	10			10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		20.4	20.4	35.8	60.4					34.0	34.0	34.0
Effective Green, g (s)		20.4	20.4	35.8	60.4					34.0	34.0	34.0
Actuated g/C Ratio		0.19	0.19	0.34	0.58					0.32	0.32	0.32
Clearance Time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1245	291	603	2925					1101	538	475
v/s Ratio Prot		c0.16		c0.36	0.24						0.11	
v/s Ratio Perm			0.10							c0.12		0.09
v/c Ratio		0.85	0.53	1.06	0.42					0.38	0.34	0.29
Uniform Delay, d1		40.8	38.0	34.6	12.5					27.3	27.0	26.5
Progression Factor		1.00	1.00	1.54	1.56					1.00	1.00	1.00
Incremental Delay, d2		7.2	6.7	50.9	0.4					1.0	1.7	1.5
Delay (s)		48.0	44.6	104.1	19.8					28.3	28.7	28.0
Level of Service		D	D	F	B					C	C	C
Approach Delay (s)		47.2			48.9			0.0			28.3	
Approach LOS		D			D			A			C	

Intersection Summary		
HCM Average Control Delay	44.3	HCM Level of Service D
HCM Volume to Capacity ratio	0.75	
Actuated Cycle Length (s)	105.0	Sum of lost time (s) 14.8
Intersection Capacity Utilization	94.2%	ICU Level of Service F
Analysis Period (min)	15	
c Critical Lane Group		

Queues

3: El Cajon & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBT	NBR
Lane Group Flow (vph)	380	1022	1543	717	217	335	328
v/c Ratio	0.98	0.33	0.70	0.95	0.22	0.66	0.66
Control Delay	94.3	10.3	33.2	41.6	26.9	28.2	28.0
Queue Delay	85.2	0.2	0.5	0.0	0.1	0.0	0.0
Total Delay	179.5	10.4	33.7	41.6	27.0	28.2	28.0
Queue Length 50th (ft)	277	76	277	~312	52	136	132
Queue Length 95th (ft)	m#401	90	322	#560	80	236	231
Internal Link Dist (ft)		230	588			231	
Turn Bay Length (ft)				90	140		
Base Capacity (vph)	389	3075	2210	756	1167	576	566
Starvation Cap Reductn	76	1035	0	0	0	0	0
Spillback Cap Reductn	0	0	268	0	292	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	1.21	0.50	0.79	0.95	0.25	0.58	0.58


























Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis

3: El Cajon & SR 15 NB Ramps

1/29/2013

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		  			  		 					
Volume (vph)	350	940	0	0	1420	660	200	30	580	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Lane Util. Factor	1.00	0.91			0.86	1.00	0.97	0.95	0.95			
Frpb, ped/bikes	1.00	1.00			1.00	0.95	1.00	0.98	0.98			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.99	1.00	1.00			
Frt	1.00	1.00			1.00	0.85	1.00	0.86	0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (prot)	1770	5085			6408	1511	3403	1497	1468			
Flt Permitted	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (perm)	1770	5085			6408	1511	3403	1497	1468			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	380	1022	0	0	1543	717	217	33	630	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	235	0	67	67	0	0	0
Lane Group Flow (vph)	380	1022	0	0	1543	482	217	268	261	0	0	0
Confl. Peds. (#/hr)	10					10	10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	Perm		Perm			
Protected Phases	5	2			6			8				
Permitted Phases						6	8		8			
Actuated Green, G (s)	23.1	63.5			36.2	36.2	30.9	30.9	30.9			
Effective Green, g (s)	23.1	63.5			36.2	36.2	30.9	30.9	30.9			
Actuated g/C Ratio	0.22	0.60			0.34	0.34	0.29	0.29	0.29			
Clearance Time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2	0.2	0.2			
Lane Grp Cap (vph)	389	3075			2209	521	1001	441	432			
v/s Ratio Prot	c0.21	0.20			0.24			c0.18				
v/s Ratio Perm						c0.32	0.06		0.18			
v/c Ratio	0.98	0.33			0.70	0.92	0.22	0.61	0.60			
Uniform Delay, d1	40.7	10.3			29.7	33.1	27.9	31.8	31.8			
Progression Factor	1.55	0.87			1.00	1.00	1.00	1.00	1.00			
Incremental Delay, d2	31.5	0.2			1.9	24.6	0.0	1.6	1.6			
Delay (s)	94.4	9.2			31.6	57.7	28.0	33.5	33.4			
Level of Service	F	A			C	E	C	C	C			
Approach Delay (s)		32.3			39.8			32.1			0.0	
Approach LOS		C			D			C			A	
Intersection Summary												
HCM Average Control Delay			36.0				HCM Level of Service		D			
HCM Volume to Capacity ratio			0.83									
Actuated Cycle Length (s)			105.0				Sum of lost time (s)		14.8			
Intersection Capacity Utilization			94.2%				ICU Level of Service		F			
Analysis Period (min)			15									
c	Critical Lane Group											

Queues

4: El Cajon & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	98	1119	54	1500	272	98
v/c Ratio	0.68	0.47	0.45	0.70	0.60	0.18
Control Delay	57.8	16.7	44.8	22.5	22.7	9.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	57.8	16.7	44.8	22.5	22.7	9.3
Queue Length 50th (ft)	42	150	23	228	75	14
Queue Length 95th (ft)	#118	196	#64	#329	139	41
Internal Link Dist (ft)		588		574	300	317
Turn Bay Length (ft)	95		90			
Base Capacity (vph)	145	2356	119	2157	580	681
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.68	0.47	0.45	0.70	0.47	0.14

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

4: El Cajon & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	90	990	40	50	1350	30	180	20	50	20	30	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.4	4.9		4.4	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.91		1.00	0.91			1.00			1.00	
Frt	1.00	0.99		1.00	1.00			0.97			0.94	
Flt Protected	0.95	1.00		0.95	1.00			0.97			0.99	
Satd. Flow (prot)	1770	5056		1770	5069			1750			1733	
Flt Permitted	0.95	1.00		0.95	1.00			0.76			0.90	
Satd. Flow (perm)	1770	5056		1770	5069			1369			1583	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	98	1076	43	54	1467	33	196	22	54	22	33	43
RTOR Reduction (vph)	0	5	0	0	3	0	0	15	0	0	29	0
Lane Group Flow (vph)	98	1114	0	54	1497	0	0	257	0	0	69	0
Turn Type	Prot			Prot			Perm			Perm		
Protected Phases	5	2		1	6			8			4	
Permitted Phases							8			4		
Actuated Green, G (s)	4.6	30.8		2.7	28.9			22.3			22.3	
Effective Green, g (s)	4.6	30.8		2.7	28.9			22.3			22.3	
Actuated g/C Ratio	0.07	0.44		0.04	0.41			0.32			0.32	
Clearance Time (s)	4.4	4.9		4.4	4.9			4.9			4.9	
Vehicle Extension (s)	2.0	3.2		2.0	3.2			2.0			2.0	
Lane Grp Cap (vph)	116	2225		68	2093			436			504	
v/s Ratio Prot	c0.06	0.22		0.03	c0.30							
v/s Ratio Perm								c0.19			0.04	
v/c Ratio	0.84	0.50		0.79	0.72			0.59			0.14	
Uniform Delay, d1	32.3	14.1		33.4	17.1			20.0			17.0	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	38.7	0.8		43.2	2.1			1.3			0.0	
Delay (s)	71.0	14.9		76.6	19.2			21.3			17.0	
Level of Service	E	B		E	B			C			B	
Approach Delay (s)		19.4			21.2			21.3			17.0	
Approach LOS		B			C			C			B	

Intersection Summary

HCM Average Control Delay	20.4	HCM Level of Service	C
HCM Volume to Capacity ratio	0.68		
Actuated Cycle Length (s)	70.0	Sum of lost time (s)	14.2
Intersection Capacity Utilization	64.3%	ICU Level of Service	C
Analysis Period (min)	15		
c Critical Lane Group			

Queues

5: University & 39th

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	22	837	65	554	391	76	326	337	174
v/c Ratio	0.08	0.96	0.61	0.63	0.41	0.16	0.45	0.99	0.24
Control Delay	11.3	42.5	43.8	18.0	2.8	15.2	12.3	70.9	10.2
Queue Delay	0.0	0.0	0.0	1.7	0.1	0.0	0.0	0.0	0.0
Total Delay	11.3	42.5	43.8	19.7	2.9	15.2	12.3	70.9	10.2
Queue Length 50th (ft)	5	326	20	169	0	21	62	141	30
Queue Length 95th (ft)	17	#574	#83	269	41	48	127	#302	69
Internal Link Dist (ft)		289		315			568		302
Turn Bay Length (ft)	150		150			100		230	
Base Capacity (vph)	261	878	107	881	955	471	724	342	719
Starvation Cap Reductn	0	0	0	174	93	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.08	0.95	0.61	0.78	0.45	0.16	0.45	0.99	0.24

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

5: University & 39th

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	20	740	30	60	510	360	70	100	200	310	90	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Frt	1.00	0.99		1.00	1.00	0.85	1.00	0.90		1.00	0.93	
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (prot)	1770	1852		1770	1863	1583	1770	1677		1770	1741	
Flt Permitted	0.30	1.00		0.12	1.00	1.00	0.65	1.00		0.47	1.00	
Satd. Flow (perm)	551	1852		226	1863	1583	1206	1677		875	1741	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	22	804	33	65	554	391	76	109	217	337	98	76
RTOR Reduction (vph)	0	2	0	0	0	207	0	70	0	0	40	0
Lane Group Flow (vph)	22	835	0	65	554	184	76	256	0	337	134	0
Turn Type	Perm			Perm			Perm	Perm		Perm		
Protected Phases	2			6			8			4		
Permitted Phases	2			6			6	8		4		
Actuated Green, G (s)	32.9	32.9		32.9	32.9	32.9	27.3	27.3		27.3	27.3	
Effective Green, g (s)	32.9	32.9		32.9	32.9	32.9	27.3	27.3		27.3	27.3	
Actuated g/C Ratio	0.47	0.47		0.47	0.47	0.47	0.39	0.39		0.39	0.39	
Clearance Time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Vehicle Extension (s)	4.2	4.2		4.2	4.2	4.2	2.0	2.0		2.0	2.0	
Lane Grp Cap (vph)	259	870		106	876	744	470	654		341	679	
v/s Ratio Prot	c0.45			0.30			0.15			0.08		
v/s Ratio Perm	0.04			0.29		0.12	0.06			c0.39		
v/c Ratio	0.08	0.96		0.61	0.63	0.25	0.16	0.39		0.99	0.20	
Uniform Delay, d1	10.2	17.9		13.8	14.0	11.1	13.9	15.4		21.2	14.1	
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Incremental Delay, d2	0.6	22.2		23.7	3.5	0.8	0.1	0.1		45.0	0.1	
Delay (s)	10.9	40.1		37.5	17.5	11.9	14.0	15.5		66.2	14.2	
Level of Service	B	D		D	B	B	B	B		E	B	
Approach Delay (s)	39.3			16.6			15.2			48.5		
Approach LOS	D			B			B			D		


Intersection Summary

HCM Average Control Delay	29.3	HCM Level of Service	C
HCM Volume to Capacity ratio	0.97		
Actuated Cycle Length (s)	70.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	96.8%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

6: University & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	1054	511	402	750	380	245	222
v/c Ratio	0.64	0.68	0.98	0.35	0.40	0.49	0.40
Control Delay	27.6	12.4	74.9	10.1	24.9	21.5	7.5
Queue Delay	0.0	0.0	0.0	0.5	0.0	0.0	0.0
Total Delay	27.6	12.4	74.9	10.6	24.9	21.5	7.5
Queue Length 50th (ft)	182	53	~240	110	78	80	13
Queue Length 95th (ft)	230	172	#413	147	114	149	66
Internal Link Dist (ft)	315			260		545	
Turn Bay Length (ft)		95			250		
Base Capacity (vph)	1638	747	412	2139	1121	574	609
Starvation Cap Reductn	0	0	0	864	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.68	0.98	0.59	0.34	0.43	0.36

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

6: University & SR 15 SB Ramps

1/29/2013




Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↑↑↑	↗	↘	↑↑					↖	↗	↘	
Volume (vph)	0	970	470	370	690	0	0	0	0	350	120	310	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6	
Lane Util. Factor		0.91	1.00	1.00	0.95					0.97	0.95	0.95	
Frbp, ped/bikes		1.00	0.96	1.00	1.00					1.00	0.99	0.98	
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.99	1.00	1.00	
Frt		1.00	0.85	1.00	1.00					1.00	0.93	0.85	
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00	
Satd. Flow (prot)		5085	1516	1770	3539					3402	1626	1467	
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00	
Satd. Flow (perm)		5085	1516	1770	3539					3402	1626	1467	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	0	1054	511	402	750	0	0	0	0	380	130	337	
RTOR Reduction (vph)	0	0	259	0	0	0	0	0	0	0	40	134	
Lane Group Flow (vph)	0	1054	252	402	750	0	0	0	0	380	205	88	
Confl. Peds. (#/hr)			10	10			10		10	10		10	
Confl. Bikes (#/hr)			5			5			5			5	
Turn Type			Perm	Prot						Perm		Perm	
Protected Phases		2		1	6						4		
Permitted Phases			2							4		4	
Actuated Green, G (s)		27.4	27.4	19.8	51.4					24.0	24.0	24.0	
Effective Green, g (s)		27.4	27.4	19.8	51.4					24.0	24.0	24.0	
Actuated g/C Ratio		0.32	0.32	0.23	0.60					0.28	0.28	0.28	
Clearance Time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6	
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2	
Lane Grp Cap (vph)		1639	489	412	2140					961	459	414	
v/s Ratio Prot		c0.21		c0.23	0.21						c0.13		
v/s Ratio Perm			0.17							0.11		0.06	
v/c Ratio		0.64	0.52	0.98	0.35					0.40	0.45	0.21	
Uniform Delay, d1		24.6	23.4	32.4	8.4					24.6	25.0	23.3	
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00	
Incremental Delay, d2		2.0	3.9	37.5	0.5					0.1	0.3	0.1	
Delay (s)		26.6	27.3	69.8	8.9					24.7	25.3	23.4	
Level of Service		C	C	E	A					C	C	C	
Approach Delay (s)		26.8			30.2			0.0			24.5		
Approach LOS		C			C			A			C		
Intersection Summary													
HCM Average Control Delay			27.3									HCM Level of Service	C
HCM Volume to Capacity ratio			0.67										
Actuated Cycle Length (s)			85.0									Sum of lost time (s)	13.8
Intersection Capacity Utilization			105.4%									ICU Level of Service	G
Analysis Period (min)			15										
c	Critical Lane Group												

Queues

7: University & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBR
Lane Group Flow (vph)	565	750	761	913	283	554
v/c Ratio	1.02	0.30	0.40	1.05	0.39	0.58
Control Delay	90.5	7.6	33.3	63.9	49.1	9.5
Queue Delay	232.3	1.7	1.0	45.8	0.0	0.0
Total Delay	322.8	9.3	34.3	109.7	49.1	9.5
Queue Length 50th (ft)	~544	118	186	~597	114	26
Queue Length 95th (ft)	#775	145	225	#858	159	86
Internal Link Dist (ft)		260	323			
Turn Bay Length (ft)				225	365	365
Base Capacity (vph)	554	2528	1889	870	725	952
Starvation Cap Reductn	193	1554	807	84	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	1.57	0.77	0.70	1.16	0.39	0.58

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

7: University & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑			↑↑↑	↗	↘↗		↗↗			
Volume (vph)	520	690	0	0	700	840	260	0	510	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	5.0		5.0			
Lane Util. Factor	1.00	0.95			0.91	1.00	0.97		0.88			
Frbp, ped/bikes	1.00	1.00			1.00	0.94	1.00		0.95			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.99		1.00			
Frt	1.00	1.00			1.00	0.85	1.00		0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (prot)	1770	3539			5085	1490	3385		2644			
Flt Permitted	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (perm)	1770	3539			5085	1490	3385		2644			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	565	750	0	0	761	913	283	0	554	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	316	0	0	385	0	0	0
Lane Group Flow (vph)	565	750	0	0	761	597	283	0	169	0	0	0
Confl. Peds. (#/hr)	10					10	10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	custom		custom			
Protected Phases	5	2			6							
Permitted Phases						6	8		8			
Actuated Green, G (s)	43.8	100.0			52.0	52.0	30.0		30.0			
Effective Green, g (s)	43.8	100.0			52.0	52.0	30.0		30.0			
Actuated g/C Ratio	0.31	0.71			0.37	0.37	0.21		0.21			
Clearance Time (s)	4.2	5.0			5.0	5.0	5.0		5.0			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2		0.2			
Lane Grp Cap (vph)	554	2528			1889	553	725		567			
v/s Ratio Prot	c0.32	0.21			0.15							
v/s Ratio Perm						c0.40	c0.08		0.06			
v/c Ratio	1.02	0.30			0.40	1.08	0.39		0.30			
Uniform Delay, d1	48.1	7.3			32.5	44.0	47.2		46.2			
Progression Factor	1.00	1.00			1.00	1.00	1.00		1.00			
Incremental Delay, d2	43.3	0.3			0.6	61.4	1.6		1.3			
Delay (s)	91.4	7.6			33.2	105.4	48.7		47.5			
Level of Service	F	A			C	F	D		D			
Approach Delay (s)		43.6			72.6			47.9			0.0	
Approach LOS		D			E			D			A	

Intersection Summary

HCM Average Control Delay	57.2	HCM Level of Service	E
HCM Volume to Capacity ratio	0.89		
Actuated Cycle Length (s)	140.0	Sum of lost time (s)	14.2
Intersection Capacity Utilization	105.4%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			

Queues

8: University & 41st

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	65	1163	22	1293	445	109
v/c Ratio	0.96	0.54	0.11	1.14	1.17	0.21
Control Delay	126.2	13.5	10.6	98.0	138.2	14.2
Queue Delay	0.0	3.8	0.0	100.8	0.0	0.0
Total Delay	126.2	17.2	10.6	198.9	138.2	14.2
Queue Length 50th (ft)	40	231	6	-1075	-375	22
Queue Length 95th (ft)	#89	287	18	#1337	#578	65
Internal Link Dist (ft)		323		304	593	79
Turn Bay Length (ft)	42		155			
Base Capacity (vph)	68	2136	206	1132	379	517
Starvation Cap Reductn	0	863	0	188	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.96	0.91	0.11	1.37	1.17	0.21

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

8: University & 41st

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	60	970	100	20	1150	40	350	20	40	20	20	60
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	1.00			0.99			0.92	
Flt Protected	0.95	1.00		0.95	1.00			0.96			0.99	
Satd. Flow (prot)	1770	3489		1770	1853			1763			1696	
Flt Permitted	0.06	1.00		0.18	1.00			0.68			0.92	
Satd. Flow (perm)	111	3489		337	1853			1248			1567	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	65	1054	109	22	1250	43	380	22	43	22	22	65
RTOR Reduction (vph)	0	7	0	0	1	0	0	3	0	0	45	0
Lane Group Flow (vph)	65	1156	0	22	1292	0	0	442	0	0	64	0
Turn Type	Perm		Perm		Perm		Perm		Perm		Perm	
Protected Phases	2		6		6		8		8		4	
Permitted Phases	2		6		6		8		8		4	
Actuated Green, G (s)	67.1	67.1		67.1	67.1			33.1			33.1	
Effective Green, g (s)	67.1	67.1		67.1	67.1			33.1			33.1	
Actuated g/C Ratio	0.61	0.61		0.61	0.61			0.30			0.30	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0			2.0			2.0	
Lane Grp Cap (vph)	68	2128		206	1130			376			472	
v/s Ratio Prot		0.33			c0.70							
v/s Ratio Perm	0.59			0.07				c0.35			0.04	
v/c Ratio	0.96	0.54		0.11	1.14			1.17			0.13	
Uniform Delay, d1	20.1	12.5		8.9	21.5			38.5			28.0	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	97.2	1.0		1.0	75.3			103.0			0.0	
Delay (s)	117.3	13.5		10.0	96.8			141.4			28.1	
Level of Service	F	B		A	F			F			C	
Approach Delay (s)		19.0			95.3			141.4			28.1	
Approach LOS		B			F			F			C	

Intersection Summary

HCM Average Control Delay	69.3	HCM Level of Service	E
HCM Volume to Capacity ratio	1.15		
Actuated Cycle Length (s)	110.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	100.7%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			

Queues

9: University & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	43	870	43	967	250	217
v/c Ratio	0.32	0.40	0.13	0.85	0.58	0.65
Control Delay	17.4	9.3	9.1	23.3	26.1	32.4
Queue Delay	0.0	0.4	0.0	0.0	0.0	0.0
Total Delay	17.4	9.6	9.1	23.3	26.1	32.4
Queue Length 50th (ft)	10	116	9	389	84	82
Queue Length 95th (ft)	39	156	25	#683	155	154
Internal Link Dist (ft)		304		883	602	1199
Turn Bay Length (ft)	150		150			
Base Capacity (vph)	133	2168	331	1140	486	381
Starvation Cap Reductn	0	691	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.32	0.59	0.13	0.85	0.51	0.57

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

9: University & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	40	770	30	40	850	40	60	80	90	90	60	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.95			0.97	
Flt Protected	0.95	1.00		0.95	1.00			0.99			0.98	
Satd. Flow (prot)	1770	3519		1770	1850			1742			1760	
Flt Permitted	0.12	1.00		0.29	1.00			0.86			0.67	
Satd. Flow (perm)	216	3519		538	1850			1516			1215	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	43	837	33	43	924	43	65	87	98	98	65	54
RTOR Reduction (vph)	0	3	0	0	2	0	0	31	0	0	15	0
Lane Group Flow (vph)	43	867	0	43	965	0	0	219	0	0	202	0
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases	2			6			8			4		
Permitted Phases	2			6			8			4		
Actuated Green, G (s)	49.2	49.2		49.2	49.2			21.0			21.0	
Effective Green, g (s)	49.2	49.2		49.2	49.2			21.0			21.0	
Actuated g/C Ratio	0.62	0.62		0.62	0.62			0.26			0.26	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	2.9	2.9		2.9	2.9			2.0			2.0	
Lane Grp Cap (vph)	133	2164		331	1138			398			319	
v/s Ratio Prot		0.25			c0.52							
v/s Ratio Perm	0.20			0.08				0.14			c0.17	
v/c Ratio	0.32	0.40		0.13	0.85			0.55			0.63	
Uniform Delay, d1	7.4	7.9		6.4	12.4			25.4			26.1	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	6.3	0.6		0.8	7.9			0.9			3.0	
Delay (s)	13.7	8.4		7.3	20.3			26.4			29.1	
Level of Service	B	A		A	C			C			C	
Approach Delay (s)		8.7			19.7			26.4			29.1	
Approach LOS		A			B			C			C	


Intersection Summary

HCM Average Control Delay	17.1	HCM Level of Service	B
HCM Volume to Capacity ratio	0.78		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	74.5%	ICU Level of Service	D
Analysis Period (min)	15		
c Critical Lane Group			

Queues

1: El Cajon & 37th

1/29/2013



Lane Group	EBL	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	87	1500	1413	184	141
v/c Ratio	0.94	0.56	0.75	0.34	0.27
Control Delay	117.7	15.2	26.7	17.2	14.8
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	117.7	15.2	26.7	17.2	14.8
Queue Length 50th (ft)	44	197	241	53	37
Queue Length 95th (ft)	#134	245	#326	100	75
Internal Link Dist (ft)		109	1248	382	134
Turn Bay Length (ft)	100				
Base Capacity (vph)	93	2679	1897	649	610
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.94	0.56	0.74	0.28	0.23


Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th

1/29/2013



Movement	EBU	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations		↔	↑↑↑			↑↑↑			↕			↕
Volume (vph)	30	50	1300	80	0	1210	90	50	50	70	60	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.4	4.9			4.9			4.9			4.9
Lane Util. Factor		1.00	0.91			0.91			1.00			1.00
Frt		1.00	0.99			0.99			0.94			0.97
Flt Protected		0.95	1.00			1.00			0.99			0.98
Satd. Flow (prot)		1770	5041			5032			1733			1763
Flt Permitted		0.50	1.00			1.00			0.88			0.80
Satd. Flow (perm)		931	5041			5032			1550			1447
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	33	54	1413	87	0	1315	98	54	54	76	65	43
RTOR Reduction (vph)	0	0	8	0	0	9	0	0	11	0	0	15
Lane Group Flow (vph)	0	87	1492	0	0	1404	0	0	173	0	0	126
Turn Type	custom	Prot					Perm			Perm		Perm
Protected Phases		5	2			6			8			4
Permitted Phases	5							8				4
Actuated Green, G (s)		8.0	42.4			30.0			27.8			27.8
Effective Green, g (s)		8.0	42.4			30.0			27.8			27.8
Actuated g/C Ratio		0.10	0.53			0.38			0.35			0.35
Clearance Time (s)		4.4	4.9			4.9			4.9			4.9
Vehicle Extension (s)		2.0	1.0			1.0			2.0			2.0
Lane Grp Cap (vph)		93	2672			1887			539			503
v/s Ratio Prot			0.30			c0.28						
v/s Ratio Perm		c0.09							c0.11			0.09
v/c Ratio		0.94	0.56			0.74			0.32			0.25
Uniform Delay, d1		35.7	12.6			21.7			19.2			18.7
Progression Factor		1.00	1.00			1.00			1.00			1.00
Incremental Delay, d2		71.1	0.8			2.7			0.1			0.1
Delay (s)		106.9	13.4			24.4			19.3			18.7
Level of Service		F	B			C			B			B
Approach Delay (s)			18.5			24.4			19.3			18.7
Approach LOS			B			C			B			B
Intersection Summary												
HCM Average Control Delay			21.1			HCM Level of Service			C			
HCM Volume to Capacity ratio			0.59									
Actuated Cycle Length (s)			80.0			Sum of lost time (s)			14.2			
Intersection Capacity Utilization			53.4%			ICU Level of Service			A			
Analysis Period (min)			15									
c	Critical Lane Group											

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th


1/29/2013

Movement	SBR
Lane Configurations	
Volume (vph)	30
Ideal Flow (vphpl)	1900
Total Lost time (s)	
Lane Util. Factor	
Fr	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Peak-hour factor, PHF	0.92
Adj. Flow (vph)	33
RTOR Reduction (vph)	0
Lane Group Flow (vph)	0
Turn Type	
Protected Phases	
Permitted Phases	
Actuated Green, G (s)	
Effective Green, g (s)	
Actuated g/C Ratio	
Clearance Time (s)	
Vehicle Extension (s)	
Lane Grp Cap (vph)	
v/s Ratio Prot	
v/s Ratio Perm	
v/c Ratio	
Uniform Delay, d1	
Progression Factor	
Incremental Delay, d2	
Delay (s)	
Level of Service	
Approach Delay (s)	
Approach LOS	
Intersection Summary	

Queues

2: El Cajon & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	2152	413	696	1315	739	393	357
v/c Ratio	1.11	0.77	1.09	0.37	0.93	0.98	0.87
Control Delay	102.7	43.5	106.8	9.6	73.0	90.6	62.3
Queue Delay	0.0	0.0	288.1	3.2	0.0	0.0	0.0
Total Delay	102.7	43.5	394.9	12.9	73.0	90.6	62.3
Queue Length 50th (ft)	~671	263	~739	173	355	369	269
Queue Length 95th (ft)	#744	404	#984	199	#473	#598	#460
Internal Link Dist (ft)	1248			230		598	
Turn Bay Length (ft)		100			200		
Base Capacity (vph)	1944	533	637	3521	795	402	409
Starvation Cap Reductn	0	0	238	2070	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	1.11	0.77	1.74	0.91	0.93	0.98	0.87

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

2: El Cajon & SR 15 SB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↗	↘	↑↑↑					↖	↗	↘
Volume (vph)	0	1980	380	640	1210	0	0	0	0	680	200	490
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Lane Util. Factor		0.86	1.00	1.00	0.91					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.94	1.00	1.00					1.00	0.99	0.97
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.99	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.93	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		6408	1486	1770	5085					3389	1629	1460
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		6408	1486	1770	5085					3389	1629	1460
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	2152	413	696	1315	0	0	0	0	739	217	533
RTOR Reduction (vph)	0	0	82	0	0	0	0	0	0	0	20	67
Lane Group Flow (vph)	0	2152	331	696	1315	0	0	0	0	739	373	290
Confl. Peds. (#/hr)			10	10			10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		44.0	44.0	52.2	100.4					34.0	34.0	34.0
Effective Green, g (s)		44.0	44.0	52.2	100.4					34.0	34.0	34.0
Actuated g/C Ratio		0.30	0.30	0.36	0.69					0.23	0.23	0.23
Clearance Time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1944	451	637	3521					795	382	342
v/s Ratio Prot		c0.34		c0.39	0.26						c0.23	
v/s Ratio Perm			0.22							0.22		0.20
v/c Ratio		1.11	0.73	1.09	0.37					0.93	0.98	0.85
Uniform Delay, d1		50.5	45.2	46.4	9.3					54.3	55.1	53.0
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00
Incremental Delay, d2		56.3	10.1	63.5	0.3					18.8	40.6	22.3
Delay (s)		106.8	55.4	109.9	9.6					73.1	95.7	75.3
Level of Service		F	E	F	A					E	F	E
Approach Delay (s)		98.5			44.3			0.0			79.6	
Approach LOS		F			D			A			E	

Intersection Summary

HCM Average Control Delay	75.9	HCM Level of Service	E
HCM Volume to Capacity ratio	1.07		
Actuated Cycle Length (s)	145.0	Sum of lost time (s)	14.8
Intersection Capacity Utilization	129.4%	ICU Level of Service	H
Analysis Period (min)	15		
c Critical Lane Group			

Queues

3: El Cajon & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBT	NBR
Lane Group Flow (vph)	380	2446	1630	663	250	379	371
v/c Ratio	0.98	0.82	0.78	0.94	0.24	0.79	0.81
Control Delay	82.4	21.2	35.8	41.6	26.5	45.5	47.2
Queue Delay	56.0	88.2	0.0	0.0	0.0	0.0	0.0
Total Delay	138.4	109.4	35.8	41.6	26.5	45.5	47.2
Queue Length 50th (ft)	256	486	298	268	60	230	227
Queue Length 95th (ft)	#448	563	346	#522	91	351	349
Internal Link Dist (ft)		230	588			231	
Turn Bay Length (ft)				90	140		
Base Capacity (vph)	389	2989	2102	707	1167	525	505
Starvation Cap Reductn	57	941	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	1.14	1.19	0.78	0.94	0.21	0.72	0.73

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

3: El Cajon & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑↑			↑↑↑	↗	↘↗	↗	↗			
Volume (vph)	350	2250	0	0	1500	610	230	70	620	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Lane Util. Factor	1.00	0.91			0.86	1.00	0.97	0.95	0.95			
Frbp, ped/bikes	1.00	1.00			1.00	0.95	1.00	0.98	0.98			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.99	1.00	1.00			
Frt	1.00	1.00			1.00	0.85	1.00	0.88	0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (prot)	1770	5085			6408	1510	3403	1527	1468			
Flt Permitted	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (perm)	1770	5085			6408	1510	3403	1527	1468			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	380	2446	0	0	1630	663	250	76	674	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	212	0	1	1	0	0	0
Lane Group Flow (vph)	380	2446	0	0	1630	451	250	378	370	0	0	0
Confl. Peds. (#/hr)	10					10	10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	Perm		Perm			
Protected Phases	5	2			6			8				
Permitted Phases						6	8		8			
Actuated Green, G (s)	23.1	61.7			34.4	34.4	32.7	32.7	32.7			
Effective Green, g (s)	23.1	61.7			34.4	34.4	32.7	32.7	32.7			
Actuated g/C Ratio	0.22	0.59			0.33	0.33	0.31	0.31	0.31			
Clearance Time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2	0.2	0.2			
Lane Grp Cap (vph)	389	2988			2099	495	1060	476	457			
v/s Ratio Prot	c0.21	0.48			0.25			0.25				
v/s Ratio Perm						c0.30	0.07		c0.25			
v/c Ratio	0.98	0.82			0.78	0.91	0.24	0.79	0.81			
Uniform Delay, d1	40.7	17.2			31.8	33.8	26.9	33.1	33.3			
Progression Factor	1.00	1.00			1.00	1.00	1.00	1.00	1.00			
Incremental Delay, d2	39.0	2.6			2.9	23.5	0.0	8.3	9.6			
Delay (s)	79.7	19.8			34.7	57.4	26.9	41.3	42.9			
Level of Service	E	B			C	E	C	D	D			
Approach Delay (s)		27.9			41.3			38.3			0.0	
Approach LOS		C			D			D			A	

Intersection Summary

HCM Average Control Delay	34.6	HCM Level of Service	C
HCM Volume to Capacity ratio	0.89		
Actuated Cycle Length (s)	105.0	Sum of lost time (s)	14.8
Intersection Capacity Utilization	129.4%	ICU Level of Service	H
Analysis Period (min)	15		
c Critical Lane Group			

Queues

4: El Cajon & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	207	1967	98	1532	260	151
v/c Ratio	0.87	0.90	0.77	0.81	0.59	0.31
Control Delay	69.9	29.7	74.9	28.7	26.2	16.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	69.9	29.7	74.9	28.7	26.2	16.9
Queue Length 50th (ft)	103	~349	49	267	92	42
Queue Length 95th (ft)	#220	#475	#130	#366	165	86
Internal Link Dist (ft)		588		574	300	317
Turn Bay Length (ft)	95		90			
Base Capacity (vph)	241	2195	127	1889	501	562
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.86	0.90	0.77	0.81	0.52	0.27

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

4: El Cajon & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	190	1690	120	90	1350	60	140	50	50	50	50	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.4	4.9		4.4	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.91		1.00	0.91			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.97			0.96	
Flt Protected	0.95	1.00		0.95	1.00			0.97			0.98	
Satd. Flow (prot)	1770	5035		1770	5053			1759			1760	
Flt Permitted	0.95	1.00		0.95	1.00			0.74			0.83	
Satd. Flow (perm)	1770	5035		1770	5053			1343			1496	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	207	1837	130	98	1467	65	152	54	54	54	54	43
RTOR Reduction (vph)	0	9	0	0	6	0	0	13	0	0	19	0
Lane Group Flow (vph)	207	1958	0	98	1526	0	0	247	0	0	132	0
Turn Type	Prot			Prot			Perm			Perm		
Protected Phases	5	2		1	6			8			4	
Permitted Phases							8			4		
Actuated Green, G (s)	10.7	34.7		5.8	29.8			25.3			25.3	
Effective Green, g (s)	10.7	34.7		5.8	29.8			25.3			25.3	
Actuated g/C Ratio	0.13	0.43		0.07	0.37			0.32			0.32	
Clearance Time (s)	4.4	4.9		4.4	4.9			4.9			4.9	
Vehicle Extension (s)	2.0	3.2		2.0	3.2			2.0			2.0	
Lane Grp Cap (vph)	237	2184		128	1882			425			473	
v/s Ratio Prot	c0.12	c0.39		0.06	0.30							
v/s Ratio Perm								c0.18			0.09	
v/c Ratio	0.87	0.90		0.77	0.81			0.58			0.28	
Uniform Delay, d1	34.0	21.0		36.4	22.6			22.9			20.5	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	27.2	6.3		21.4	3.9			1.3			0.1	
Delay (s)	61.2	27.3		57.8	26.5			24.2			20.6	
Level of Service	E	C		E	C			C			C	
Approach Delay (s)		30.5			28.4			24.2			20.6	
Approach LOS		C			C			C			C	

Intersection Summary

HCM Average Control Delay	28.9	HCM Level of Service	C
HCM Volume to Capacity ratio	0.75		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	9.3
Intersection Capacity Utilization	72.2%	ICU Level of Service	C
Analysis Period (min)	15		
c Critical Lane Group			

Queues

5: University & 39th

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	54	967	65	1011	261	65	217	337	196
v/c Ratio	0.57	0.94	0.69	0.97	0.26	0.18	0.35	1.01	0.33
Control Delay	41.7	34.6	55.8	41.7	1.9	21.5	11.2	81.2	18.0
Queue Delay	0.0	0.0	0.0	87.2	0.0	0.0	0.0	0.0	0.0
Total Delay	41.7	34.6	55.8	128.9	1.9	21.5	11.2	81.2	18.0
Queue Length 50th (ft)	16	410	22	450	0	23	34	~171	57
Queue Length 95th (ft)	#79	#701	#97	#745	30	54	87	#337	110
Internal Link Dist (ft)		289		315			568		302
Turn Bay Length (ft)	150		150			100		230	
Base Capacity (vph)	94	1036	94	1041	1000	354	618	335	591
Starvation Cap Reductn	0	0	0	204	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.57	0.93	0.69	1.21	0.26	0.18	0.35	1.01	0.33

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

5: University & 39th

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	50	850	40	60	930	240	60	60	140	310	110	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Frt	1.00	0.99		1.00	1.00	0.85	1.00	0.89		1.00	0.94	
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (prot)	1770	1850		1770	1863	1583	1770	1667		1770	1754	
Flt Permitted	0.09	1.00		0.09	1.00	1.00	0.59	1.00		0.56	1.00	
Satd. Flow (perm)	167	1850		167	1863	1583	1102	1667		1045	1754	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	924	43	65	1011	261	65	65	152	337	120	76
RTOR Reduction (vph)	0	2	0	0	0	116	0	83	0	0	29	0
Lane Group Flow (vph)	54	965	0	65	1011	145	65	134	0	337	167	0
Turn Type	Perm			Perm			Perm	Perm		Perm		
Protected Phases	2			6			8			4		
Permitted Phases	2			6			6	8		4		
Actuated Green, G (s)	44.5	44.5		44.5	44.5	44.5	25.7	25.7		25.7	25.7	
Effective Green, g (s)	44.5	44.5		44.5	44.5	44.5	25.7	25.7		25.7	25.7	
Actuated g/C Ratio	0.56	0.56		0.56	0.56	0.56	0.32	0.32		0.32	0.32	
Clearance Time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Vehicle Extension (s)	4.2	4.2		4.2	4.2	4.2	2.0	2.0		2.0	2.0	
Lane Grp Cap (vph)	93	1029		93	1036	881	354	536		336	563	
v/s Ratio Prot		0.52		c0.54			0.08			0.10		
v/s Ratio Perm	0.32			0.39		0.09	0.06			c0.32		
v/c Ratio	0.58	0.94		0.70	0.98	0.16	0.18	0.25		1.00	0.30	
Uniform Delay, d1	11.6	16.5		12.9	17.2	8.7	19.6	20.0		27.1	20.4	
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Incremental Delay, d2	23.8	16.5		35.6	22.7	0.4	0.1	0.1		49.8	0.1	
Delay (s)	35.4	33.0		48.5	40.0	9.1	19.7	20.1		77.0	20.5	
Level of Service	D	C		D	D	A	B	C		E	C	
Approach Delay (s)		33.1			34.3			20.0			56.2	
Approach LOS		C			C			C			E	


Intersection Summary

HCM Average Control Delay	36.4	HCM Level of Service	D
HCM Volume to Capacity ratio	0.99		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	91.0%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

6: University & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	1185	500	533	902	696	399	351
v/c Ratio	0.84	0.93	0.98	0.41	0.76	0.84	0.69
Control Delay	39.4	49.5	69.7	10.0	37.3	48.5	24.3
Queue Delay	0.0	0.0	79.4	1.1	0.0	0.0	0.0
Total Delay	39.4	49.5	149.1	11.0	37.3	48.5	24.3
Queue Length 50th (ft)	251	214	~329	140	191	225	107
Queue Length 95th (ft)	#329	#423	#540	181	254	#373	212
Internal Link Dist (ft)	315			260		545	
Turn Bay Length (ft)		95			250		
Base Capacity (vph)	1412	538	542	2223	1002	515	540
Starvation Cap Reductn	0	0	98	999	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.84	0.93	1.20	0.74	0.69	0.77	0.65

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

6: University & SR 15 SB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↗	↘	↑↑					↖	↗	↘
Volume (vph)	0	1090	460	490	830	0	0	0	0	640	310	380
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6
Lane Util. Factor		0.91	1.00	1.00	0.95					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.95	1.00	1.00					1.00	1.00	0.97
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.99	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.98	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		5085	1512	1770	3539					3398	1721	1465
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		5085	1512	1770	3539					3398	1721	1465
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	1185	500	533	902	0	0	0	0	696	337	413
RTOR Reduction (vph)	0	0	118	0	0	0	0	0	0	0	7	112
Lane Group Flow (vph)	0	1185	382	533	902	0	0	0	0	696	392	239
Confl. Peds. (#/hr)			10	10			10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		26.4	26.4	29.1	59.7					25.7	25.7	25.7
Effective Green, g (s)		26.4	26.4	29.1	59.7					25.7	25.7	25.7
Actuated g/C Ratio		0.28	0.28	0.31	0.63					0.27	0.27	0.27
Clearance Time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1413	420	542	2224					919	466	396
v/s Ratio Prot		0.23		c0.30	0.25						c0.23	
v/s Ratio Perm			c0.25							0.20		0.16
v/c Ratio		0.84	0.91	0.98	0.41					0.76	0.84	0.60
Uniform Delay, d1		32.3	33.2	32.7	8.8					31.8	32.7	30.2
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00
Incremental Delay, d2		6.1	26.3	34.1	0.6					3.2	12.4	1.8
Delay (s)		38.4	59.5	66.8	9.4					35.0	45.1	32.0
Level of Service		D	E	E	A					C	D	C
Approach Delay (s)		44.7			30.7			0.0			37.1	
Approach LOS		D			C			A			D	


Intersection Summary

HCM Average Control Delay	37.9	HCM Level of Service	D
HCM Volume to Capacity ratio	0.91		
Actuated Cycle Length (s)	95.0	Sum of lost time (s)	13.8
Intersection Capacity Utilization	119.8%	ICU Level of Service	H
Analysis Period (min)	15		
c Critical Lane Group			

Queues

7: University & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBR
Lane Group Flow (vph)	337	1424	924	630	380	772
v/c Ratio	0.97	0.77	0.66	0.72	0.31	0.79
Control Delay	76.1	19.6	29.0	7.9	18.8	28.1
Queue Delay	0.0	22.5	0.0	0.0	0.0	0.0
Total Delay	76.1	42.1	29.0	7.9	18.8	28.1
Queue Length 50th (ft)	~174	301	154	0	65	173
Queue Length 95th (ft)	#338	393	199	95	97	247
Internal Link Dist (ft)		260	323			
Turn Bay Length (ft)				225	365	365
Base Capacity (vph)	348	1855	1398	872	1320	1063
Starvation Cap Reductn	0	479	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.97	1.03	0.66	0.72	0.29	0.73

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

7: University & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑			↑↑↑	↗	↘↗		↗↗			
Volume (vph)	310	1310	0	0	850	580	350	0	710	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	4.6		4.6			
Lane Util. Factor	1.00	0.95			0.91	1.00	0.97		0.88			
Frbp, ped/bikes	1.00	1.00			1.00	0.95	1.00		0.96			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.99		1.00			
Frt	1.00	1.00			1.00	0.85	1.00		0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (prot)	1770	3539			5085	1510	3406		2681			
Flt Permitted	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (perm)	1770	3539			5085	1510	3406		2681			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	337	1424	0	0	924	630	380	0	772	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	457	0	0	24	0	0	0
Lane Group Flow (vph)	337	1424	0	0	924	173	380	0	748	0	0	0
Confl. Peds. (#/hr)	10					10	10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot				Perm	custom			custom			
Protected Phases	5	2			6							
Permitted Phases						6	8		8			
Actuated Green, G (s)	15.7	41.9			22.0	22.0	28.5		28.5			
Effective Green, g (s)	15.7	41.9			22.0	22.0	28.5		28.5			
Actuated g/C Ratio	0.20	0.52			0.28	0.28	0.36		0.36			
Clearance Time (s)	4.2	5.0			5.0	5.0	4.6		4.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2		0.2			
Lane Grp Cap (vph)	347	1854			1398	415	1213		955			
v/s Ratio Prot	c0.19	c0.40			0.18							
v/s Ratio Perm						0.11	0.11		c0.28			
v/c Ratio	0.97	0.77			0.66	0.42	0.31		0.78			
Uniform Delay, d1	31.9	15.2			25.7	23.8	18.7		23.0			
Progression Factor	1.00	1.00			1.00	1.00	1.00		1.00			
Incremental Delay, d2	40.3	3.1			2.5	3.1	0.1		3.9			
Delay (s)	72.2	18.3			28.2	26.8	18.7		26.9			
Level of Service	E	B			C	C	B		C			
Approach Delay (s)		28.6			27.6			24.2			0.0	
Approach LOS		C			C			C			A	

Intersection Summary

HCM Average Control Delay	27.1	HCM Level of Service	C
HCM Volume to Capacity ratio	0.79		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	8.8
Intersection Capacity Utilization	119.8%	ICU Level of Service	H
Analysis Period (min)	15		
c Critical Lane Group			

Queues

8: University & 41st

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	43	1957	22	1261	402	65
v/c Ratio	0.63	0.88	0.32	1.06	1.06	0.14
Control Delay	58.1	22.3	24.6	66.2	102.0	14.5
Queue Delay	0.0	85.3	0.0	104.4	0.0	0.0
Total Delay	58.1	107.6	24.6	170.6	102.0	14.5
Queue Length 50th (ft)	17	546	7	~985	~310	12
Queue Length 95th (ft)	#90	678	31	#1248	#505	46
Internal Link Dist (ft)		323		304	593	79
Turn Bay Length (ft)	42		155			
Base Capacity (vph)	68	2223	68	1186	379	467
Starvation Cap Reductn	0	577	0	219	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.63	1.19	0.32	1.30	1.06	0.14

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

8: University & 41st

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	40	1570	230	20	1150	10	310	10	50	10	10	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.98		1.00	1.00			0.98			0.91	
Flt Protected	0.95	1.00		0.95	1.00			0.96			0.99	
Satd. Flow (prot)	1770	3471		1770	1860			1755			1682	
Flt Permitted	0.06	1.00		0.06	1.00			0.75			0.94	
Satd. Flow (perm)	106	3471		106	1860			1366			1592	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	43	1707	250	22	1250	11	337	11	54	11	11	43
RTOR Reduction (vph)	0	11	0	0	0	0	0	5	0	0	31	0
Lane Group Flow (vph)	43	1946	0	22	1261	0	0	397	0	0	34	0
Turn Type	Perm		Perm		Perm			Perm		Perm		
Protected Phases	2		6		8			8		4		
Permitted Phases	2		6		8			8		4		
Actuated Green, G (s)	70.1	70.1		70.1	70.1			30.1			30.1	
Effective Green, g (s)	70.1	70.1		70.1	70.1			30.1			30.1	
Actuated g/C Ratio	0.64	0.64		0.64	0.64			0.27			0.27	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0			2.0			2.0	
Lane Grp Cap (vph)	68	2212		68	1185			374			436	
v/s Ratio Prot		0.56		c0.68								
v/s Ratio Perm	0.40			0.21				c0.29			0.02	
v/c Ratio	0.63	0.88		0.32	1.06			1.06			0.08	
Uniform Delay, d1	12.1	16.5		9.1	20.0			40.0			29.6	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	37.2	5.4		12.2	44.9			63.7			0.0	
Delay (s)	49.3	21.9		21.3	64.9			103.6			29.7	
Level of Service	D	C		C	E			F			C	
Approach Delay (s)		22.5			64.1			103.6			29.7	
Approach LOS		C			E			F			C	

Intersection Summary

HCM Average Control Delay	45.6	HCM Level of Service	D
HCM Volume to Capacity ratio	1.06		
Actuated Cycle Length (s)	110.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	96.7%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

9: University & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	54	1848	65	1293	305	316
v/c Ratio	0.72	0.81	0.87	1.08	1.06	0.83
Control Delay	66.7	16.6	95.9	69.2	106.7	52.3
Queue Delay	0.0	53.9	0.0	0.0	0.0	0.0
Total Delay	66.7	70.4	95.9	69.2	106.7	52.3
Queue Length 50th (ft)	21	412	30	-926	-208	174
Queue Length 95th (ft)	#102	518	#78	#1184	#377	#323
Internal Link Dist (ft)		304		883	602	1199
Turn Bay Length (ft)	150		150			
Base Capacity (vph)	75	2281	75	1200	287	379
Starvation Cap Reductn	0	624	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.72	1.12	0.87	1.08	1.06	0.83

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

9: University & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↗		↖	↗			↕			↕	
Volume (vph)	50	1600	100	60	1120	70	110	100	70	70	110	110
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.97			0.95	
Flt Protected	0.95	1.00		0.95	1.00			0.98			0.99	
Satd. Flow (prot)	1770	3508		1770	1846			1765			1746	
Flt Permitted	0.06	1.00		0.06	1.00			0.60			0.80	
Satd. Flow (perm)	115	3508		115	1846			1087			1408	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	1739	109	65	1217	76	120	109	76	76	120	120
RTOR Reduction (vph)	0	5	0	0	2	0	0	12	0	0	22	0
Lane Group Flow (vph)	54	1843	0	65	1291	0	0	293	0	0	294	0
Turn Type	Perm		Perm		Perm		Perm		Perm		Perm	
Protected Phases	2		6		8		8		4		4	
Permitted Phases	2		6		8		8		4		4	
Actuated Green, G (s)	64.9	64.9		64.9	64.9			25.3			25.3	
Effective Green, g (s)	64.9	64.9		64.9	64.9			25.3			25.3	
Actuated g/C Ratio	0.65	0.65		0.65	0.65			0.25			0.25	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	2.9	2.9		2.9	2.9			2.0			2.0	
Lane Grp Cap (vph)	75	2277		75	1198			275			356	
v/s Ratio Prot		0.53		c0.70								
v/s Ratio Perm	0.47			0.57				c0.27			0.21	
v/c Ratio	0.72	0.81		0.87	1.08			1.07			0.82	
Uniform Delay, d1	11.6	13.0		14.1	17.5			37.4			35.3	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	45.4	3.2		71.3	49.6			72.7			13.7	
Delay (s)	56.9	16.2		85.4	67.1			110.1			49.0	
Level of Service	E	B		F	E			F			D	
Approach Delay (s)		17.4			68.0			110.1			49.0	
Approach LOS		B			E			F			D	

Intersection Summary

HCM Average Control Delay	44.9	HCM Level of Service	D
HCM Volume to Capacity ratio	1.07		
Actuated Cycle Length (s)	100.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	97.2%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			


Appendix F

2035 Proposed Land Uses Scenario – Synchro Sheets (Intersection & Queue)

Queues

1: El Cajon & 37th

1/29/2013




Lane Group	EBL	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	33	685	826	173	142
v/c Ratio	0.22	0.26	0.35	0.29	0.28
Control Delay	37.2	11.9	17.0	11.4	14.9
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	37.2	11.9	17.0	11.4	14.9
Queue Length 50th (ft)	16	72	91	35	37
Queue Length 95th (ft)	41	97	159	75	76
Internal Link Dist (ft)		109	1248	382	134
Turn Bay Length (ft)	100				
Base Capacity (vph)	179	2682	2380	689	600
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.18	0.26	0.35	0.25	0.24

Intersection Summary

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th

1/29/2013



Movement	EBU	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations												
Volume (vph)	10	20	600	30	0	730	30	40	50	70	70	30
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.4	4.9			4.9			4.9			4.9
Lane Util. Factor		1.00	0.91			0.91			1.00			1.00
Frt		1.00	0.99			0.99			0.94			0.97
Flt Protected		0.95	1.00			1.00			0.99			0.97
Satd. Flow (prot)		1770	5049			5055			1731			1757
Flt Permitted		1.00	1.00			1.00			0.90			0.79
Satd. Flow (perm)		1863	5049			5055			1584			1420
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	11	22	652	33	0	793	33	43	54	76	76	33
RTOR Reduction (vph)	0	0	6	0	0	5	0	0	39	0	0	15
Lane Group Flow (vph)	0	33	679	0	0	821	0	0	134	0	0	127
Turn Type	custom	Prot					Perm			Perm		Perm
Protected Phases		5	2			6			8			4
Permitted Phases	5							8				4
Actuated Green, G (s)		3.1	42.4			34.9			27.8			27.8
Effective Green, g (s)		3.1	42.4			34.9			27.8			27.8
Actuated g/C Ratio		0.04	0.53			0.44			0.35			0.35
Clearance Time (s)		4.4	4.9			4.9			4.9			4.9
Vehicle Extension (s)		2.0	1.0			1.0			2.0			2.0
Lane Grp Cap (vph)		72	2676			2205			550			493
v/s Ratio Prot			0.13			c0.16						
v/s Ratio Perm		c0.02							0.08			c0.09
v/c Ratio		0.46	0.25			0.37			0.24			0.26
Uniform Delay, d1		37.6	10.2			15.2			18.6			18.7
Progression Factor		1.00	1.00			1.00			1.00			1.00
Incremental Delay, d2		1.7	0.2			0.5			0.1			0.1
Delay (s)		39.3	10.4			15.7			18.7			18.8
Level of Service		D	B			B			B			B
Approach Delay (s)			11.8			15.7			18.7			18.8
Approach LOS			B			B			B			B
Intersection Summary												
HCM Average Control Delay			14.7			HCM Level of Service			B			
HCM Volume to Capacity ratio			0.33									
Actuated Cycle Length (s)			80.0			Sum of lost time (s)			14.2			
Intersection Capacity Utilization			47.0%			ICU Level of Service			A			
Analysis Period (min)			15									
c	Critical Lane Group											

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th


1/29/2013

Movement	SBR
Lane Configurations	
Volume (vph)	30
Ideal Flow (vphpl)	1900
Total Lost time (s)	
Lane Util. Factor	
Fr	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Peak-hour factor, PHF	0.92
Adj. Flow (vph)	33
RTOR Reduction (vph)	0
Lane Group Flow (vph)	0
Turn Type	
Protected Phases	
Permitted Phases	
Actuated Green, G (s)	
Effective Green, g (s)	
Actuated g/C Ratio	
Clearance Time (s)	
Vehicle Extension (s)	
Lane Grp Cap (vph)	
v/s Ratio Prot	
v/s Ratio Perm	
v/c Ratio	
Uniform Delay, d1	
Progression Factor	
Incremental Delay, d2	
Delay (s)	
Level of Service	
Approach Delay (s)	
Approach LOS	
Intersection Summary	

Queues

2: El Cajon & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	978	348	609	1130	380	200	180
v/c Ratio	0.79	0.69	1.01	0.39	0.35	0.36	0.34
Control Delay	45.5	18.8	74.7	12.7	28.1	25.5	16.7
Queue Delay	0.0	0.0	184.0	1.4	0.0	0.0	0.0
Total Delay	45.5	18.8	258.7	14.1	28.1	25.5	16.7
Queue Length 50th (ft)	183	51	~413	142	99	91	50
Queue Length 95th (ft)	222	155	#646	173	139	157	111
Internal Link Dist (ft)	1248			230		598	
Turn Bay Length (ft)		100			200		
Base Capacity (vph)	1245	501	603	2925	1101	557	529
Starvation Cap Reductn	0	0	183	1522	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.79	0.69	1.45	0.81	0.35	0.36	0.34

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

2: El Cajon & SR 15 SB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↗	↘	↑↑↑					↖	↗	↘
Volume (vph)	0	900	320	560	1040	0	0	0	0	350	120	230
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Lane Util. Factor		0.86	1.00	1.00	0.91					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.94	1.00	1.00					1.00	0.99	0.98
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.99	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.95	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		6408	1496	1770	5085					3401	1662	1467
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		6408	1496	1770	5085					3401	1662	1467
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	978	348	609	1130	0	0	0	0	380	130	250
RTOR Reduction (vph)	0	0	210	0	0	0	0	0	0	0	18	54
Lane Group Flow (vph)	0	978	138	609	1130	0	0	0	0	380	182	126
Confl. Peds. (#/hr)			10	10			10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		20.4	20.4	35.8	60.4					34.0	34.0	34.0
Effective Green, g (s)		20.4	20.4	35.8	60.4					34.0	34.0	34.0
Actuated g/C Ratio		0.19	0.19	0.34	0.58					0.32	0.32	0.32
Clearance Time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1245	291	603	2925					1101	538	475
v/s Ratio Prot		c0.15		c0.34	0.22						0.11	
v/s Ratio Perm			0.09							c0.11		0.09
v/c Ratio		0.79	0.47	1.01	0.39					0.35	0.34	0.27
Uniform Delay, d1		40.2	37.5	34.6	12.2					27.0	27.0	26.3
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00
Incremental Delay, d2		5.0	5.4	39.1	0.4					0.9	1.7	1.4
Delay (s)		45.3	43.0	73.7	12.6					27.9	28.7	27.6
Level of Service		D	D	E	B					C	C	C
Approach Delay (s)		44.7			34.0			0.0			28.0	
Approach LOS		D			C			A			C	

Intersection Summary

HCM Average Control Delay	36.5	HCM Level of Service	D
HCM Volume to Capacity ratio	0.71		
Actuated Cycle Length (s)	105.0	Sum of lost time (s)	14.8
Intersection Capacity Utilization	96.8%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

3: El Cajon & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBT	NBR
Lane Group Flow (vph)	402	1000	1511	772	217	341	333
v/c Ratio	0.98	0.31	0.64	0.97	0.24	0.70	0.69
Control Delay	84.8	10.7	32.5	44.9	32.0	31.2	30.8
Queue Delay	99.6	0.6	0.0	0.0	0.0	0.0	0.0
Total Delay	184.4	11.3	32.5	44.9	32.0	31.2	30.8
Queue Length 50th (ft)	~302	128	282	~408	60	147	142
Queue Length 95th (ft)	#506	155	326	#648	91	255	248
Internal Link Dist (ft)		230	588			231	
Turn Bay Length (ft)				90	140		
Base Capacity (vph)	410	3250	2379	798	1064	549	540
Starvation Cap Reductn	88	1718	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	1.25	0.65	0.64	0.97	0.20	0.62	0.62

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

3: El Cajon & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑↑			↑↑↑	↗	↘↗	↗	↗			
Volume (vph)	370	920	0	0	1390	710	200	30	590	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Lane Util. Factor	1.00	0.91			0.86	1.00	0.97	0.95	0.95			
Frbp, ped/bikes	1.00	1.00			1.00	0.95	1.00	0.98	0.97			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.99	1.00	1.00			
Frt	1.00	1.00			1.00	0.85	1.00	0.86	0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (prot)	1770	5085			6408	1508	3400	1495	1466			
Flt Permitted	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (perm)	1770	5085			6408	1508	3400	1495	1466			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	402	1000	0	0	1511	772	217	33	641	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	238	0	86	86	0	0	0
Lane Group Flow (vph)	402	1000	0	0	1511	534	217	255	247	0	0	0
Confl. Peds. (#/hr)	10					10	10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	Perm		Perm			
Protected Phases	5	2			6			8				
Permitted Phases						6	8		8			
Actuated Green, G (s)	26.6	73.5			42.7	42.7	30.9	30.9	30.9			
Effective Green, g (s)	26.6	73.5			42.7	42.7	30.9	30.9	30.9			
Actuated g/C Ratio	0.23	0.64			0.37	0.37	0.27	0.27	0.27			
Clearance Time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2	0.2	0.2			
Lane Grp Cap (vph)	409	3250			2379	560	914	402	394			
v/s Ratio Prot	c0.23	0.20			0.24			c0.17				
v/s Ratio Perm						c0.35	0.06		0.17			
v/c Ratio	0.98	0.31			0.64	0.95	0.24	0.63	0.63			
Uniform Delay, d1	44.0	9.3			29.7	35.2	32.8	37.1	37.0			
Progression Factor	1.00	1.00			1.00	1.00	1.00	1.00	1.00			
Incremental Delay, d2	39.6	0.2			1.3	28.0	0.0	2.4	2.2			
Delay (s)	83.6	9.6			31.0	63.2	32.9	39.5	39.2			
Level of Service	F	A			C	E	C	D	D			
Approach Delay (s)		30.8			41.9			37.8			0.0	
Approach LOS		C			D			D			A	

Intersection Summary

HCM Average Control Delay	37.7	HCM Level of Service	D
HCM Volume to Capacity ratio	0.86		
Actuated Cycle Length (s)	115.0	Sum of lost time (s)	14.8
Intersection Capacity Utilization	96.8%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

4: El Cajon & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	120	1011	33	1348	196	120
v/c Ratio	0.70	0.40	0.25	0.62	0.47	0.24
Control Delay	55.1	14.8	35.4	21.3	19.4	9.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	55.1	14.8	35.4	21.3	19.4	9.6
Queue Length 50th (ft)	51	104	14	204	50	17
Queue Length 95th (ft)	#129	178	39	#293	97	46
Internal Link Dist (ft)		588		574	300	317
Turn Bay Length (ft)	95		90			
Base Capacity (vph)	175	2547	139	2176	572	674
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.69	0.40	0.24	0.62	0.34	0.18

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

4: El Cajon & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	110	900	30	30	1210	30	130	20	30	30	30	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.4	4.9		4.4	4.9			4.9				4.9
Lane Util. Factor	1.00	0.91		1.00	0.91			1.00				1.00
Frt	1.00	1.00		1.00	1.00			0.98				0.94
Flt Protected	0.95	1.00		0.95	1.00			0.97				0.99
Satd. Flow (prot)	1770	5060		1770	5067			1757				1726
Flt Permitted	0.95	1.00		0.95	1.00			0.75				0.89
Satd. Flow (perm)	1770	5060		1770	5067			1357				1551
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	120	978	33	33	1315	33	141	22	33	33	33	54
RTOR Reduction (vph)	0	4	0	0	3	0	0	13	0	0	38	0
Lane Group Flow (vph)	120	1007	0	33	1345	0	0	183	0	0	82	0
Turn Type	Prot			Prot			Perm		Perm			Perm
Protected Phases	5	2		1	6			8				4
Permitted Phases							8			4		
Actuated Green, G (s)	5.6	32.5		2.2	29.1			21.1				21.1
Effective Green, g (s)	5.6	32.5		2.2	29.1			21.1				21.1
Actuated g/C Ratio	0.08	0.46		0.03	0.42			0.30				0.30
Clearance Time (s)	4.4	4.9		4.4	4.9			4.9				4.9
Vehicle Extension (s)	2.0	3.2		2.0	3.2			2.0				2.0
Lane Grp Cap (vph)	142	2349		56	2106			409				468
v/s Ratio Prot	c0.07	c0.20		0.02	c0.27							
v/s Ratio Perm								c0.14				0.05
v/c Ratio	0.85	0.43		0.59	0.64			0.45				0.18
Uniform Delay, d1	31.8	12.5		33.5	16.3			19.7				18.0
Progression Factor	1.00	1.00		1.00	1.00			1.00				1.00
Incremental Delay, d2	33.3	0.6		9.8	1.5			0.3				0.1
Delay (s)	65.1	13.1		43.3	17.8			20.0				18.1
Level of Service	E	B		D	B			C				B
Approach Delay (s)		18.6			18.4			20.0				18.1
Approach LOS		B			B			C				B

Intersection Summary

HCM Average Control Delay	18.6	HCM Level of Service	B
HCM Volume to Capacity ratio	0.63		
Actuated Cycle Length (s)	70.0	Sum of lost time (s)	19.1
Intersection Capacity Utilization	58.7%	ICU Level of Service	B
Analysis Period (min)	15		
c Critical Lane Group			

Queues

5: University & 39th

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	22	913	65	609	380	76	305	326	163
v/c Ratio	0.09	0.97	0.65	0.65	0.38	0.17	0.45	1.02	0.24
Control Delay	10.8	43.9	49.5	17.7	2.5	17.6	13.8	82.1	11.1
Queue Delay	0.0	0.0	0.0	3.3	0.2	0.0	0.0	0.0	0.0
Total Delay	10.8	43.9	49.5	20.9	2.7	17.6	13.8	82.1	11.1
Queue Length 50th (ft)	5	387	21	196	0	23	64	~154	30
Queue Length 95th (ft)	17	#657	#90	304	39	53	131	#314	70
Internal Link Dist (ft)		289		315			568		302
Turn Bay Length (ft)	150		150			100		230	
Base Capacity (vph)	257	938	100	941	988	443	678	321	672
Starvation Cap Reductn	0	0	0	231	162	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.09	0.97	0.65	0.86	0.46	0.17	0.45	1.02	0.24

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

5: University & 39th

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	20	810	30	60	560	350	70	90	190	300	80	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Frt	1.00	0.99		1.00	1.00	0.85	1.00	0.90		1.00	0.93	
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (prot)	1770	1853		1770	1863	1583	1770	1673		1770	1732	
Flt Permitted	0.27	1.00		0.11	1.00	1.00	0.65	1.00		0.47	1.00	
Satd. Flow (perm)	508	1853		197	1863	1583	1218	1673		881	1732	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	22	880	33	65	609	380	76	98	207	326	87	76
RTOR Reduction (vph)	0	2	0	0	0	188	0	69	0	0	42	0
Lane Group Flow (vph)	22	911	0	65	609	192	76	236	0	326	121	0
Turn Type	Perm			Perm			Perm	Perm		Perm		
Protected Phases	2			6			8			4		
Permitted Phases	2			6			6	8		4		
Actuated Green, G (s)	37.9	37.9		37.9	37.9	37.9	27.3	27.3		27.3	27.3	
Effective Green, g (s)	37.9	37.9		37.9	37.9	37.9	27.3	27.3		27.3	27.3	
Actuated g/C Ratio	0.51	0.51		0.51	0.51	0.51	0.36	0.36		0.36	0.36	
Clearance Time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Vehicle Extension (s)	4.2	4.2		4.2	4.2	4.2	2.0	2.0		2.0	2.0	
Lane Grp Cap (vph)	257	936		100	941	800	443	609		321	630	
v/s Ratio Prot	c0.49			0.33			0.14			0.07		
v/s Ratio Perm	0.04			0.33		0.12	0.06			c0.37		
v/c Ratio	0.09	0.97		0.65	0.65	0.24	0.17	0.39		1.02	0.19	
Uniform Delay, d1	9.6	18.1		13.7	13.6	10.4	16.2	17.7		23.9	16.3	
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Incremental Delay, d2	0.7	23.6		28.3	3.4	0.7	0.1	0.1		54.2	0.1	
Delay (s)	10.2	41.7		42.0	17.1	11.2	16.2	17.8		78.1	16.4	
Level of Service	B	D		D	B	B	B	B		E	B	
Approach Delay (s)	41.0			16.5			17.5			57.5		
Approach LOS	D			B			B			E		


Intersection Summary

HCM Average Control Delay	31.6	HCM Level of Service	C
HCM Volume to Capacity ratio	0.99		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	95.1%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

6: University & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	1098	511	402	783	402	248	230
v/c Ratio	0.67	0.69	0.98	0.37	0.42	0.49	0.43
Control Delay	28.1	13.4	74.9	10.3	25.2	21.5	9.1
Queue Delay	0.0	0.0	0.0	0.5	0.0	0.0	0.0
Total Delay	28.1	13.4	74.9	10.8	25.2	21.5	9.1
Queue Length 50th (ft)	191	60	~240	116	83	81	22
Queue Length 95th (ft)	241	183	#413	155	121	150	78
Internal Link Dist (ft)	315			260		545	
Turn Bay Length (ft)		95			250		
Base Capacity (vph)	1634	736	412	2135	1121	574	600
Starvation Cap Reductn	0	0	0	853	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.67	0.69	0.98	0.61	0.36	0.43	0.38

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

6: University & SR 15 SB Ramps

1/29/2013




Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↗	↘	↑↑					↖	↗	↘
Volume (vph)	0	1010	470	370	720	0	0	0	0	370	120	320
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6
Lane Util. Factor		0.91	1.00	1.00	0.95					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.96	1.00	1.00					1.00	0.99	0.98
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.99	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.93	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		5085	1516	1770	3539					3402	1624	1467
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		5085	1516	1770	3539					3402	1624	1467
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	1098	511	402	783	0	0	0	0	402	130	348
RTOR Reduction (vph)	0	0	249	0	0	0	0	0	0	0	41	124
Lane Group Flow (vph)	0	1098	262	402	783	0	0	0	0	402	207	106
Confl. Peds. (#/hr)			10	10			10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		27.3	27.3	19.8	51.3					24.1	24.1	24.1
Effective Green, g (s)		27.3	27.3	19.8	51.3					24.1	24.1	24.1
Actuated g/C Ratio		0.32	0.32	0.23	0.60					0.28	0.28	0.28
Clearance Time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1633	487	412	2136					965	460	416
v/s Ratio Prot		c0.22		c0.23	0.22						c0.13	
v/s Ratio Perm			0.17							0.12		0.07
v/c Ratio		0.67	0.54	0.98	0.37					0.42	0.45	0.25
Uniform Delay, d1		25.0	23.7	32.4	8.6					24.7	25.0	23.5
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00
Incremental Delay, d2		2.2	4.2	37.5	0.5					0.1	0.3	0.1
Delay (s)		27.2	27.9	69.8	9.1					24.8	25.3	23.6
Level of Service		C	C	E	A					C	C	C
Approach Delay (s)		27.4			29.7			0.0			24.6	
Approach LOS		C			C			A			C	

Intersection Summary		
HCM Average Control Delay	27.5	HCM Level of Service C
HCM Volume to Capacity ratio	0.68	
Actuated Cycle Length (s)	85.0	Sum of lost time (s) 13.8
Intersection Capacity Utilization	102.7%	ICU Level of Service G
Analysis Period (min)	15	
c Critical Lane Group		

Queues

7: University & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBR
Lane Group Flow (vph)	598	826	826	913	293	554
v/c Ratio	1.00	0.31	0.42	1.05	0.48	0.66
Control Delay	84.6	6.7	34.7	64.7	57.0	15.5
Queue Delay	226.7	1.4	1.2	50.3	0.0	0.0
Total Delay	311.3	8.1	35.9	115.0	57.0	15.5
Queue Length 50th (ft)	~629	136	219	~668	129	53
Queue Length 95th (ft)	#868	164	260	#932	177	124
Internal Link Dist (ft)		260	323			
Turn Bay Length (ft)				225	365	365
Base Capacity (vph)	601	2676	1976	873	699	894
Starvation Cap Reductn	212	1575	865	92	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	1.54	0.75	0.74	1.17	0.42	0.62

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

7: University & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑			↑↑↑	↗	↘↘		↗↗			
Volume (vph)	550	760	0	0	760	840	270	0	510	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	4.6		4.6			
Lane Util. Factor	1.00	0.95			0.91	1.00	0.97		0.88			
Frbp, ped/bikes	1.00	1.00			1.00	0.94	1.00		0.95			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.99		1.00			
Frt	1.00	1.00			1.00	0.85	1.00		0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (prot)	1770	3539			5085	1486	3383		2637			
Flt Permitted	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (perm)	1770	3539			5085	1486	3383		2637			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	598	826	0	0	826	913	293	0	554	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	295	0	0	360	0	0	0
Lane Group Flow (vph)	598	826	0	0	826	618	293	0	194	0	0	0
Confl. Peds. (#/hr)	10					10	10		10	10		10
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	custom		custom			
Protected Phases	5	2			6							
Permitted Phases						6	8		8			
Actuated Green, G (s)	50.9	113.4			58.3	58.3	27.0		27.0			
Effective Green, g (s)	50.9	113.4			58.3	58.3	27.0		27.0			
Actuated g/C Ratio	0.34	0.76			0.39	0.39	0.18		0.18			
Clearance Time (s)	4.2	5.0			5.0	5.0	4.6		4.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2		0.2			
Lane Grp Cap (vph)	601	2675			1976	578	609		475			
v/s Ratio Prot	c0.34	0.23			0.16							
v/s Ratio Perm						c0.42	c0.09		0.07			
v/c Ratio	1.00	0.31			0.42	1.07	0.48		0.41			
Uniform Delay, d1	49.4	5.8			33.5	45.9	55.2		54.4			
Progression Factor	1.00	1.00			1.00	1.00	1.00		1.00			
Incremental Delay, d2	35.2	0.3			0.7	57.5	0.2		0.2			
Delay (s)	84.6	6.1			34.1	103.3	55.4		54.6			
Level of Service	F	A			C	F	E		D			
Approach Delay (s)		39.1			70.5			54.9			0.0	
Approach LOS		D			E			D			A	
Intersection Summary												
HCM Average Control Delay			56.0		HCM Level of Service				E			
HCM Volume to Capacity ratio			0.93									
Actuated Cycle Length (s)			150.0		Sum of lost time (s)				13.8			
Intersection Capacity Utilization			102.7%		ICU Level of Service				G			
Analysis Period (min)			15									
c	Critical Lane Group											

Queues

8: University & 41st

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	76	1218	22	1358	500	131
v/c Ratio	1.33	0.58	0.12	1.22	1.30	0.25
Control Delay	259.8	17.0	13.3	133.1	190.1	19.4
Queue Delay	0.0	17.0	0.0	100.1	0.0	0.0
Total Delay	259.8	34.1	13.3	233.2	190.1	19.4
Queue Length 50th (ft)	~83	309	8	~1408	~540	44
Queue Length 95th (ft)	#141	373	23	#1677	#763	96
Internal Link Dist (ft)		323		304	593	79
Turn Bay Length (ft)	42		155			
Base Capacity (vph)	57	2101	179	1114	384	531
Starvation Cap Reductn	0	898	0	173	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	1.33	1.01	0.12	1.44	1.30	0.25

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

8: University & 41st

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	70	1010	110	20	1200	50	400	20	40	30	20	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.99			0.92	
Flt Protected	0.95	1.00		0.95	1.00			0.96			0.99	
Satd. Flow (prot)	1770	3487		1770	1852			1764			1695	
Flt Permitted	0.05	1.00		0.16	1.00			0.64			0.89	
Satd. Flow (perm)	95	3487		298	1852			1177			1522	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	76	1098	120	22	1304	54	435	22	43	33	22	76
RTOR Reduction (vph)	0	6	0	0	1	0	0	3	0	0	39	0
Lane Group Flow (vph)	76	1212	0	22	1357	0	0	497	0	0	92	0
Turn Type	Perm		Perm		Perm		Perm		Perm		Perm	
Protected Phases	2		6		6		8		8		4	
Permitted Phases	2		6		6		8		8		4	
Actuated Green, G (s)	78.1	78.1		78.1	78.1			42.1			42.1	
Effective Green, g (s)	78.1	78.1		78.1	78.1			42.1			42.1	
Actuated g/C Ratio	0.60	0.60		0.60	0.60			0.32			0.32	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0			2.0			2.0	
Lane Grp Cap (vph)	57	2095		179	1113			381			493	
v/s Ratio Prot		0.35			0.73							
v/s Ratio Perm	c0.80			0.07				c0.42			0.06	
v/c Ratio	1.33	0.58		0.12	1.22			1.31			0.19	
Uniform Delay, d1	26.0	15.9		11.2	26.0			44.0			31.6	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	231.8	1.2		1.4	106.9			155.2			0.1	
Delay (s)	257.7	17.0		12.6	132.8			199.2			31.7	
Level of Service	F	B		B	F			F			C	
Approach Delay (s)		31.2			130.9			199.2			31.7	
Approach LOS		C			F			F			C	

Intersection Summary

HCM Average Control Delay	98.3	HCM Level of Service	F
HCM Volume to Capacity ratio	1.32		
Actuated Cycle Length (s)	130.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	106.7%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			

Queues

9: University & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	43	990	43	1108	239	195
v/c Ratio	0.52	0.43	0.14	0.91	0.63	0.66
Control Delay	37.9	8.7	8.5	27.9	33.0	38.4
Queue Delay	0.0	0.6	0.0	0.0	0.0	0.0
Total Delay	37.9	9.3	8.5	27.9	33.0	38.4
Queue Length 50th (ft)	13	138	9	530	98	86
Queue Length 95th (ft)	#72	182	25	#880	174	158
Internal Link Dist (ft)		304		883	602	1199
Turn Bay Length (ft)	150		150			
Base Capacity (vph)	83	2317	308	1218	430	336
Starvation Cap Reductn	0	859	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.52	0.68	0.14	0.91	0.56	0.58

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

9: University & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	40	880	30	40	980	40	60	70	90	80	50	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.94			0.96	
Flt Protected	0.95	1.00		0.95	1.00			0.99			0.98	
Satd. Flow (prot)	1770	3522		1770	1852			1736			1754	
Flt Permitted	0.07	1.00		0.25	1.00			0.85			0.66	
Satd. Flow (perm)	126	3522		469	1852			1489			1186	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	43	957	33	43	1065	43	65	76	98	87	54	54
RTOR Reduction (vph)	0	2	0	0	1	0	0	29	0	0	16	0
Lane Group Flow (vph)	43	988	0	43	1107	0	0	210	0	0	179	0
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases	2			6			8			4		
Permitted Phases	2			6			8			4		
Actuated Green, G (s)	59.1	59.1		59.1	59.1			21.1			21.1	
Effective Green, g (s)	59.1	59.1		59.1	59.1			21.1			21.1	
Actuated g/C Ratio	0.66	0.66		0.66	0.66			0.23			0.23	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	2.9	2.9		2.9	2.9			2.0			2.0	
Lane Grp Cap (vph)	83	2313		308	1216			349			278	
v/s Ratio Prot		0.28			c0.60							
v/s Ratio Perm	0.34			0.09				0.14			c0.15	
v/c Ratio	0.52	0.43		0.14	0.91			0.60			0.64	
Uniform Delay, d1	8.0	7.4		5.8	13.2			30.7			31.1	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	21.2	0.6		0.9	11.6			2.0			3.8	
Delay (s)	29.3	7.9		6.8	24.8			32.7			34.9	
Level of Service	C	A		A	C			C			C	
Approach Delay (s)		8.8			24.1			32.7			34.9	
Approach LOS		A			C			C			C	


Intersection Summary

HCM Average Control Delay	19.7	HCM Level of Service	B
HCM Volume to Capacity ratio	0.84		
Actuated Cycle Length (s)	90.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	78.9%	ICU Level of Service	D
Analysis Period (min)	15		
c Critical Lane Group			

Queues

1: El Cajon & 37th

1/29/2013



Lane Group	EBL	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	87	1489	1391	184	141
v/c Ratio	0.94	0.56	0.73	0.33	0.27
Control Delay	117.7	15.2	26.3	17.1	14.8
Queue Delay	0.0	0.0	0.0	0.0	0.0
Total Delay	117.7	15.2	26.3	17.1	14.8
Queue Length 50th (ft)	44	195	235	53	37
Queue Length 95th (ft)	#134	242	#302	99	75
Internal Link Dist (ft)		109	1248	382	134
Turn Bay Length (ft)	100				
Base Capacity (vph)	93	2679	1896	650	610
Starvation Cap Reductn	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.94	0.56	0.73	0.28	0.23


Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th

1/29/2013



Movement	EBU	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations		↔	↑↑↑			↑↑↑			↕			↕
Volume (vph)	30	50	1290	80	0	1190	90	50	50	70	60	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.4	4.9			4.9			4.9			4.9
Lane Util. Factor		1.00	0.91			0.91			1.00			1.00
Frt		1.00	0.99			0.99			0.94			0.97
Flt Protected		0.95	1.00			1.00			0.99			0.98
Satd. Flow (prot)		1770	5041			5032			1733			1763
Flt Permitted		0.50	1.00			1.00			0.88			0.80
Satd. Flow (perm)		931	5041			5032			1550			1447
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	33	54	1402	87	0	1293	98	54	54	76	65	43
RTOR Reduction (vph)	0	0	8	0	0	10	0	0	12	0	0	15
Lane Group Flow (vph)	0	87	1481	0	0	1381	0	0	172	0	0	126
Turn Type	custom	Prot					Perm			Perm		Perm
Protected Phases		5	2			6			8			4
Permitted Phases	5						8				4	
Actuated Green, G (s)		8.0	42.4			30.0			27.8			27.8
Effective Green, g (s)		8.0	42.4			30.0			27.8			27.8
Actuated g/C Ratio		0.10	0.53			0.38			0.35			0.35
Clearance Time (s)		4.4	4.9			4.9			4.9			4.9
Vehicle Extension (s)		2.0	1.0			1.0			2.0			2.0
Lane Grp Cap (vph)		93	2672			1887			539			503
v/s Ratio Prot			0.29			c0.27						
v/s Ratio Perm		c0.09							c0.11			0.09
v/c Ratio		0.94	0.55			0.73			0.32			0.25
Uniform Delay, d1		35.7	12.5			21.5			19.2			18.7
Progression Factor		1.00	1.00			1.00			1.00			1.00
Incremental Delay, d2		71.1	0.8			2.5			0.1			0.1
Delay (s)		106.9	13.3			24.1			19.3			18.7
Level of Service		F	B			C			B			B
Approach Delay (s)			18.5			24.1			19.3			18.7
Approach LOS			B			C			B			B

Intersection Summary

HCM Average Control Delay	20.9	HCM Level of Service	C
HCM Volume to Capacity ratio	0.58		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	14.2
Intersection Capacity Utilization	53.0%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis

1: El Cajon & 37th


1/29/2013

Movement	SBR
Lane Configurations	
Volume (vph)	30
Ideal Flow (vphpl)	1900
Total Lost time (s)	
Lane Util. Factor	
Frts	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Peak-hour factor, PHF	0.92
Adj. Flow (vph)	33
RTOR Reduction (vph)	0
Lane Group Flow (vph)	0
Turn Type	
Protected Phases	
Permitted Phases	
Actuated Green, G (s)	
Effective Green, g (s)	
Actuated g/C Ratio	
Clearance Time (s)	
Vehicle Extension (s)	
Lane Grp Cap (vph)	
v/s Ratio Prot	
v/s Ratio Perm	
v/c Ratio	
Uniform Delay, d1	
Progression Factor	
Incremental Delay, d2	
Delay (s)	
Level of Service	
Approach Delay (s)	
Approach LOS	
Intersection Summary	

Queues

2: El Cajon & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	2011	424	652	1228	685	393	357
v/c Ratio	1.02	0.80	1.03	0.35	0.87	0.98	0.85
Control Delay	75.9	44.4	89.4	9.4	66.5	91.9	57.1
Queue Delay	0.0	0.0	283.3	2.5	0.0	0.0	0.0
Total Delay	75.9	44.4	372.7	11.9	66.5	91.9	57.1
Queue Length 50th (ft)	~586	267	~658	158	323	370	252
Queue Length 95th (ft)	#660	#425	#899	183	#422	#601	#436
Internal Link Dist (ft)	1248			230		598	
Turn Bay Length (ft)		100			200		
Base Capacity (vph)	1962	528	632	3521	784	400	418
Starvation Cap Reductn	0	0	245	2120	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	1.02	0.80	1.68	0.88	0.87	0.98	0.85

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

2: El Cajon & SR 15 SB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↗	↘	↑↑↑					↖	↗	↘
Volume (vph)	0	1850	390	600	1130	0	0	0	0	630	200	490
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Lane Util. Factor		0.86	1.00	1.00	0.91					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.90	1.00	1.00					1.00	0.98	0.96
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.97	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.93	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		6408	1430	1770	5085					3345	1620	1442
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		6408	1430	1770	5085					3345	1620	1442
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	2011	424	652	1228	0	0	0	0	685	217	533
RTOR Reduction (vph)	0	0	90	0	0	0	0	0	0	0	20	80
Lane Group Flow (vph)	0	2011	334	652	1228	0	0	0	0	685	373	277
Confl. Peds. (#/hr)			20	20			20		20	20		20
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		44.4	44.4	51.8	100.4					34.0	34.0	34.0
Effective Green, g (s)		44.4	44.4	51.8	100.4					34.0	34.0	34.0
Actuated g/C Ratio		0.31	0.31	0.36	0.69					0.23	0.23	0.23
Clearance Time (s)		5.0	5.0	4.2	5.0					5.6	5.6	5.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1962	438	632	3521					784	380	338
v/s Ratio Prot		c0.31		c0.37	0.24						c0.23	
v/s Ratio Perm			0.23							0.20		0.19
v/c Ratio		1.02	0.76	1.03	0.35					0.87	0.98	0.82
Uniform Delay, d1		50.3	45.5	46.6	9.0					53.4	55.2	52.6
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00
Incremental Delay, d2		26.9	11.9	44.2	0.3					12.9	41.8	19.6
Delay (s)		77.2	57.4	90.8	9.3					66.4	97.0	72.2
Level of Service		E	E	F	A					E	F	E
Approach Delay (s)		73.8			37.6			0.0			76.2	
Approach LOS		E			D			A			E	
Intersection Summary												
HCM Average Control Delay			62.6			HCM Level of Service				E		
HCM Volume to Capacity ratio			1.02									
Actuated Cycle Length (s)			145.0			Sum of lost time (s)			14.8			
Intersection Capacity Utilization			100.7%			ICU Level of Service				G		
Analysis Period (min)			15									
c Critical Lane Group												

Queues

3: El Cajon & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBT	NBR
Lane Group Flow (vph)	391	2402	1609	707	261	384	377
v/c Ratio	0.98	0.76	0.71	0.96	0.27	0.87	0.89
Control Delay	85.2	18.7	34.7	46.8	31.4	58.3	61.6
Queue Delay	103.1	80.8	0.0	0.0	0.0	0.0	0.0
Total Delay	188.3	99.5	34.7	46.8	31.4	58.3	61.6
Queue Length 50th (ft)	289	470	307	~339	73	271	268
Queue Length 95th (ft)	#486	535	352	#609	108	#435	#438
Internal Link Dist (ft)		230	588			231	
Turn Bay Length (ft)				90	140		
Base Capacity (vph)	402	3140	2279	733	1054	477	458
Starvation Cap Reductn	90	1099	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	1.25	1.18	0.71	0.96	0.25	0.81	0.82

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

3: El Cajon & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑↑			↑↑↑	↗	↘↗	↗	↗			
Volume (vph)	360	2210	0	0	1480	650	240	70	630	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Lane Util. Factor	1.00	0.91			0.86	1.00	0.97	0.95	0.95			
Frbp, ped/bikes	1.00	1.00			1.00	0.93	1.00	0.97	0.97			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.98	1.00	1.00			
Frt	1.00	1.00			1.00	0.85	1.00	0.88	0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (prot)	1770	5085			6408	1472	3367	1514	1452			
Flt Permitted	0.95	1.00			1.00	1.00	0.95	1.00	1.00			
Satd. Flow (perm)	1770	5085			6408	1472	3367	1514	1452			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	391	2402	0	0	1609	707	261	76	685	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	209	0	3	3	0	0	0
Lane Group Flow (vph)	391	2402	0	0	1609	498	261	381	374	0	0	0
Confl. Peds. (#/hr)	20					20	20		20	20		20
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	Perm		Perm			
Protected Phases	5	2			6			8				
Permitted Phases						6	8		8			
Actuated Green, G (s)	25.9	71.0			40.9	40.9	33.4	33.4	33.4			
Effective Green, g (s)	25.9	71.0			40.9	40.9	33.4	33.4	33.4			
Actuated g/C Ratio	0.23	0.62			0.36	0.36	0.29	0.29	0.29			
Clearance Time (s)	4.2	5.0			5.0	5.0	5.6	5.6	5.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2	0.2	0.2			
Lane Grp Cap (vph)	399	3139			2279	524	978	440	422			
v/s Ratio Prot	c0.22	0.47			0.25			0.25				
v/s Ratio Perm						c0.34	0.08		c0.26			
v/c Ratio	0.98	0.77			0.71	0.95	0.27	0.87	0.89			
Uniform Delay, d1	44.3	16.0			31.9	36.0	31.4	38.7	39.0			
Progression Factor	1.00	1.00			1.00	1.00	1.00	1.00	1.00			
Incremental Delay, d2	39.1	1.8			1.9	28.6	0.1	15.7	19.0			
Delay (s)	83.4	17.8			33.7	64.7	31.4	54.4	58.0			
Level of Service	F	B			C	E	C	D	E			
Approach Delay (s)		27.0			43.2			49.9			0.0	
Approach LOS		C			D			D			A	

Intersection Summary

HCM Average Control Delay	36.9	HCM Level of Service	D
HCM Volume to Capacity ratio	0.94		
Actuated Cycle Length (s)	115.0	Sum of lost time (s)	14.8
Intersection Capacity Utilization	100.7%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			

Queues

4: El Cajon & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	261	1761	65	1413	185	151
v/c Ratio	0.91	0.73	0.61	0.79	0.43	0.32
Control Delay	69.3	21.8	61.7	29.7	21.7	17.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	69.3	21.8	61.7	29.7	21.7	17.1
Queue Length 50th (ft)	129	287	32	249	61	42
Queue Length 95th (ft)	#263	353	#90	#346	114	86
Internal Link Dist (ft)		588		574	300	317
Turn Bay Length (ft)	95		90			
Base Capacity (vph)	292	2407	108	1779	507	554
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.89	0.73	0.60	0.79	0.36	0.27

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

4: El Cajon & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↑↑↑		↖	↑↑↑			↕			↕	
Volume (vph)	240	1530	90	60	1220	80	100	40	30	60	40	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.4	4.9		4.4	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.91		1.00	0.91			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.98			0.96	
Flt Protected	0.95	1.00		0.95	1.00			0.97			0.98	
Satd. Flow (prot)	1770	5043		1770	5038			1766			1753	
Flt Permitted	0.95	1.00		0.95	1.00			0.75			0.83	
Satd. Flow (perm)	1770	5043		1770	5038			1372			1479	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	261	1663	98	65	1326	87	109	43	33	65	43	43
RTOR Reduction (vph)	0	7	0	0	8	0	0	10	0	0	19	0
Lane Group Flow (vph)	261	1754	0	65	1405	0	0	175	0	0	132	0
Turn Type	Prot			Prot			Perm			Perm		
Protected Phases	5	2		1	6			8			4	
Permitted Phases							8			4		
Actuated Green, G (s)	13.0	37.2		3.9	28.1			24.7			24.7	
Effective Green, g (s)	13.0	37.2		3.9	28.1			24.7			24.7	
Actuated g/C Ratio	0.16	0.47		0.05	0.35			0.31			0.31	
Clearance Time (s)	4.4	4.9		4.4	4.9			4.9			4.9	
Vehicle Extension (s)	2.0	3.2		2.0	3.2			2.0			2.0	
Lane Grp Cap (vph)	288	2345		86	1770			424			457	
v/s Ratio Prot	c0.15	c0.35		0.04	0.28							
v/s Ratio Perm								c0.13			0.09	
v/c Ratio	0.91	0.75		0.76	0.79			0.41			0.29	
Uniform Delay, d1	32.9	17.6		37.6	23.3			21.9			21.0	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	29.3	2.2		27.9	3.8			0.2			0.1	
Delay (s)	62.2	19.8		65.5	27.1			22.1			21.1	
Level of Service	E	B		E	C			C			C	
Approach Delay (s)		25.3			28.8			22.1			21.1	
Approach LOS		C			C			C			C	

Intersection Summary

HCM Average Control Delay	26.3	HCM Level of Service	C
HCM Volume to Capacity ratio	0.63		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	9.3
Intersection Capacity Utilization	64.4%	ICU Level of Service	C
Analysis Period (min)	15		
c Critical Lane Group			

Queues
5: University & 39th

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	54	1065	65	1109	261	65	217	326	185
v/c Ratio	0.65	0.98	0.78	1.01	0.25	0.20	0.37	1.07	0.33
Control Delay	53.8	41.9	75.1	50.8	2.0	25.2	14.2	105.1	20.8
Queue Delay	0.0	0.0	0.0	104.4	0.0	0.0	0.0	0.0	0.0
Total Delay	53.8	41.9	75.1	155.2	2.0	25.2	14.2	105.1	20.8
Queue Length 50th (ft)	19	540	26	~612	2	27	46	~208	62
Queue Length 95th (ft)	#90	#864	#110	#911	32	60	105	#372	118
Internal Link Dist (ft)		289		315			568		302
Turn Bay Length (ft)	150		150			100		230	
Base Capacity (vph)	83	1090	83	1095	1034	332	582	304	558
Starvation Cap Reductn	0	0	0	219	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.65	0.98	0.78	1.27	0.25	0.20	0.37	1.07	0.33

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

5: University & 39th

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	50	940	40	60	1020	240	60	60	140	300	100	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Frt	1.00	0.99		1.00	1.00	0.85	1.00	0.89		1.00	0.94	
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (prot)	1770	1851		1770	1863	1583	1770	1667		1770	1748	
Flt Permitted	0.08	1.00		0.08	1.00	1.00	0.59	1.00		0.54	1.00	
Satd. Flow (perm)	141	1851		141	1863	1583	1094	1667		1003	1748	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	1022	43	65	1109	261	65	65	152	326	109	76
RTOR Reduction (vph)	0	2	0	0	0	103	0	76	0	0	28	0
Lane Group Flow (vph)	54	1063	0	65	1109	158	65	141	0	326	157	0
Turn Type	Perm			Perm			Perm	Perm		Perm		
Protected Phases	2			6			8			4		
Permitted Phases	2			6			6	8		4		
Actuated Green, G (s)	52.9	52.9		52.9	52.9	52.9	27.3	27.3		27.3	27.3	
Effective Green, g (s)	52.9	52.9		52.9	52.9	52.9	27.3	27.3		27.3	27.3	
Actuated g/C Ratio	0.59	0.59		0.59	0.59	0.59	0.30	0.30		0.30	0.30	
Clearance Time (s)	4.9	4.9		4.9	4.9	4.9	4.9	4.9		4.9	4.9	
Vehicle Extension (s)	4.2	4.2		4.2	4.2	4.2	2.0	2.0		2.0	2.0	
Lane Grp Cap (vph)	83	1088		83	1095	930	332	506		304	530	
v/s Ratio Prot		0.57			c0.60			0.08			0.09	
v/s Ratio Perm	0.38			0.46		0.10	0.06			c0.33		
v/c Ratio	0.65	0.98		0.78	1.01	0.17	0.20	0.28		1.07	0.30	
Uniform Delay, d1	12.4	18.0		14.2	18.6	8.5	23.2	23.9		31.4	24.0	
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00		1.00	1.00	
Incremental Delay, d2	33.3	22.4		51.3	30.4	0.4	0.1	0.1		72.2	0.1	
Delay (s)	45.7	40.3		65.5	48.9	8.9	23.3	24.0		103.5	24.1	
Level of Service	D	D		E	D	A	C	C		F	C	
Approach Delay (s)		40.6			42.4			23.8			74.8	
Approach LOS		D			D			C			E	


Intersection Summary

HCM Average Control Delay	45.2	HCM Level of Service	D
HCM Volume to Capacity ratio	1.03		
Actuated Cycle Length (s)	90.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	94.3%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

Queues

6: University & SR 15 SB Ramps

1/29/2013



Lane Group	EBT	EBR	WBL	WBT	SBL	SBT	SBR
Lane Group Flow (vph)	1228	489	533	935	750	418	365
v/c Ratio	0.89	0.96	0.98	0.42	0.81	0.87	0.73
Control Delay	42.6	56.3	69.7	10.3	39.6	51.3	27.5
Queue Delay	0.0	0.0	79.4	1.2	0.0	0.0	0.0
Total Delay	42.6	56.3	149.1	11.5	39.6	51.3	27.5
Queue Length 50th (ft)	263	218	~329	147	210	240	124
Queue Length 95th (ft)	#350	#429	#540	189	277	#404	236
Internal Link Dist (ft)	315			260		545	
Turn Bay Length (ft)		95			250		
Base Capacity (vph)	1387	511	542	2206	991	513	528
Starvation Cap Reductn	0	0	98	985	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.89	0.96	1.20	0.77	0.76	0.81	0.69

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

6: University & SR 15 SB Ramps

1/29/2013




Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑↑	↑	↑	↑↑					↑↑	↑	↑
Volume (vph)	0	1130	450	490	860	0	0	0	0	690	320	400
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6
Lane Util. Factor		0.91	1.00	1.00	0.95					0.97	0.95	0.95
Frbp, ped/bikes		1.00	0.94	1.00	1.00					1.00	0.99	0.96
Flpb, ped/bikes		1.00	1.00	1.00	1.00					0.98	1.00	1.00
Frt		1.00	0.85	1.00	1.00					1.00	0.97	0.85
Flt Protected		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (prot)		5085	1482	1770	3539					3363	1715	1450
Flt Permitted		1.00	1.00	0.95	1.00					0.95	1.00	1.00
Satd. Flow (perm)		5085	1482	1770	3539					3363	1715	1450
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	1228	489	533	935	0	0	0	0	750	348	435
RTOR Reduction (vph)	0	0	107	0	0	0	0	0	0	0	8	103
Lane Group Flow (vph)	0	1228	382	533	935	0	0	0	0	750	410	262
Confl. Peds. (#/hr)			20	20			20		20	20		20
Confl. Bikes (#/hr)			5			5			5			5
Turn Type			Perm	Prot						Perm		Perm
Protected Phases		2		1	6						4	
Permitted Phases			2							4		4
Actuated Green, G (s)		25.9	25.9	29.1	59.2					26.2	26.2	26.2
Effective Green, g (s)		25.9	25.9	29.1	59.2					26.2	26.2	26.2
Actuated g/C Ratio		0.27	0.27	0.31	0.62					0.28	0.28	0.28
Clearance Time (s)		5.0	5.0	4.2	5.0					4.6	4.6	4.6
Vehicle Extension (s)		0.2	0.2	0.2	0.2					0.2	0.2	0.2
Lane Grp Cap (vph)		1386	404	542	2205					927	473	400
v/s Ratio Prot		0.24		c0.30	0.26						c0.24	
v/s Ratio Perm			c0.26							0.22		0.18
v/c Ratio		0.89	0.95	0.98	0.42					0.81	0.87	0.66
Uniform Delay, d1		33.1	33.9	32.7	9.2					32.1	32.7	30.4
Progression Factor		1.00	1.00	1.00	1.00					1.00	1.00	1.00
Incremental Delay, d2		8.6	33.0	34.1	0.6					5.0	14.9	2.9
Delay (s)		41.8	66.9	66.8	9.8					37.0	47.6	33.3
Level of Service		D	E	E	A					D	D	C
Approach Delay (s)		48.9			30.5			0.0			39.0	
Approach LOS		D			C			A			D	

Intersection Summary		
HCM Average Control Delay	40.0	HCM Level of Service D
HCM Volume to Capacity ratio	0.93	
Actuated Cycle Length (s)	95.0	Sum of lost time (s) 13.8
Intersection Capacity Utilization	123.1%	ICU Level of Service H
Analysis Period (min)	15	
c Critical Lane Group		

Queues

7: University & SR 15 NB Ramps

1/29/2013



Lane Group	EBL	EBT	WBT	WBR	NBL	NBR
Lane Group Flow (vph)	359	1554	1011	630	391	772
v/c Ratio	0.97	0.84	0.76	0.74	0.32	0.80
Control Delay	76.1	22.8	31.8	8.5	18.9	29.2
Queue Delay	0.0	50.3	0.0	0.0	0.0	0.0
Total Delay	76.1	73.1	31.8	8.5	18.9	29.2
Queue Length 50th (ft)	~206	350	171	0	68	177
Queue Length 95th (ft)	#367	#510	220	97	100	252
Internal Link Dist (ft)		260	323			
Turn Bay Length (ft)				225	365	365
Base Capacity (vph)	370	1851	1329	851	1310	1042
Starvation Cap Reductn	0	447	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.97	1.11	0.76	0.74	0.30	0.74

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

7: University & SR 15 NB Ramps

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↘	↑↑			↑↑↑	↗	↘↗		↗↗			
Volume (vph)	330	1430	0	0	930	580	360	0	710	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.2	5.0			5.0	5.0	4.6		4.6			
Lane Util. Factor	1.00	0.95			0.91	1.00	0.97		0.88			
Frbp, ped/bikes	1.00	1.00			1.00	0.93	1.00		0.95			
Flpb, ped/bikes	1.00	1.00			1.00	1.00	0.98		1.00			
Frt	1.00	1.00			1.00	0.85	1.00		0.85			
Flt Protected	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (prot)	1770	3539			5085	1479	3380		2646			
Flt Permitted	0.95	1.00			1.00	1.00	0.95		1.00			
Satd. Flow (perm)	1770	3539			5085	1479	3380		2646			
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	359	1554	0	0	1011	630	391	0	772	0	0	0
RTOR Reduction (vph)	0	0	0	0	0	465	0	0	17	0	0	0
Lane Group Flow (vph)	359	1554	0	0	1011	165	391	0	755	0	0	0
Confl. Peds. (#/hr)	20					20	20		20	20		20
Confl. Bikes (#/hr)			5			5			5			5
Turn Type	Prot					Perm	custom		custom			
Protected Phases	5	2			6							
Permitted Phases						6	8		8			
Actuated Green, G (s)	16.7	41.8			20.9	20.9	28.6		28.6			
Effective Green, g (s)	16.7	41.8			20.9	20.9	28.6		28.6			
Actuated g/C Ratio	0.21	0.52			0.26	0.26	0.36		0.36			
Clearance Time (s)	4.2	5.0			5.0	5.0	4.6		4.6			
Vehicle Extension (s)	0.2	0.2			0.2	0.2	0.2		0.2			
Lane Grp Cap (vph)	369	1849			1328	386	1208		946			
v/s Ratio Prot	c0.20	c0.44			0.20							
v/s Ratio Perm						0.11	0.12		c0.29			
v/c Ratio	0.97	0.84			0.76	0.43	0.32		0.80			
Uniform Delay, d1	31.4	16.3			27.2	24.6	18.7		23.1			
Progression Factor	1.00	1.00			1.00	1.00	1.00		1.00			
Incremental Delay, d2	39.3	4.8			4.2	3.4	0.1		4.5			
Delay (s)	70.7	21.1			31.4	28.0	18.7		27.6			
Level of Service	E	C			C	C	B		C			
Approach Delay (s)		30.4			30.1			24.6			0.0	
Approach LOS		C			C			C			A	

Intersection Summary

HCM Average Control Delay	28.9	HCM Level of Service	C
HCM Volume to Capacity ratio	0.82		
Actuated Cycle Length (s)	80.0	Sum of lost time (s)	8.8
Intersection Capacity Utilization	123.1%	ICU Level of Service	H
Analysis Period (min)	15		
c Critical Lane Group			

Queues

8: University & 41st

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	54	2066	22	1315	456	76
v/c Ratio	0.87	0.95	0.35	1.13	1.16	0.15
Control Delay	109.8	31.4	30.1	93.0	135.1	13.2
Queue Delay	0.0	114.9	0.0	102.9	0.0	0.0
Total Delay	109.8	146.4	30.1	195.9	135.1	13.2
Queue Length 50th (ft)	32	716	8	-1184	-416	12
Queue Length 95th (ft)	#77	#962	38	#1452	#624	50
Internal Link Dist (ft)		323		304	593	79
Turn Bay Length (ft)	42		155			
Base Capacity (vph)	62	2179	62	1165	393	502
Starvation Cap Reductn	0	540	0	199	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.87	1.26	0.35	1.36	1.16	0.15

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

8: University & 41st

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	50	1640	260	20	1200	10	350	10	60	10	10	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.98		1.00	1.00			0.98			0.90	
Flt Protected	0.95	1.00		0.95	1.00			0.96			0.99	
Satd. Flow (prot)	1770	3466		1770	1860			1754			1672	
Flt Permitted	0.05	1.00		0.05	1.00			0.73			0.94	
Satd. Flow (perm)	99	3466		99	1860			1325			1587	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	1783	283	22	1304	11	380	11	65	11	11	54
RTOR Reduction (vph)	0	10	0	0	0	0	0	5	0	0	38	0
Lane Group Flow (vph)	54	2056	0	22	1315	0	0	451	0	0	38	0
Turn Type	Perm		Perm		Perm		Perm		Perm		Perm	
Protected Phases	2		6		6		8		8		4	
Permitted Phases	2		6		6		8		8		4	
Actuated Green, G (s)	75.1	75.1		75.1	75.1			35.1			35.1	
Effective Green, g (s)	75.1	75.1		75.1	75.1			35.1			35.1	
Actuated g/C Ratio	0.63	0.63		0.63	0.63			0.29			0.29	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0			2.0			2.0	
Lane Grp Cap (vph)	62	2169		62	1164			388			464	
v/s Ratio Prot		0.59			c0.71							
v/s Ratio Perm	0.54			0.22				c0.34			0.02	
v/c Ratio	0.87	0.95		0.35	1.13			1.16			0.08	
Uniform Delay, d1	18.5	20.6		10.8	22.5			42.5			30.8	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	81.5	10.4		15.2	69.5			97.9			0.0	
Delay (s)	100.0	31.1		26.0	92.0			140.4			30.8	
Level of Service	F	C		C	F			F			C	
Approach Delay (s)		32.8			90.9			140.4			30.8	
Approach LOS		C			F			F			C	

Intersection Summary

HCM Average Control Delay	64.5	HCM Level of Service	E
HCM Volume to Capacity ratio	1.14		
Actuated Cycle Length (s)	120.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	102.2%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			

Queues

9: University & Marlborough

1/29/2013



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	54	2087	65	1456	283	305
v/c Ratio	0.79	0.87	0.96	1.15	1.11	0.91
Control Delay	84.4	18.7	123.4	97.6	127.4	70.7
Queue Delay	0.0	72.7	0.0	0.0	0.0	0.0
Total Delay	84.4	91.4	123.4	97.6	127.4	70.7
Queue Length 50th (ft)	24	540	38	-1217	-220	196
Queue Length 95th (ft)	#66	670	#90	#1484	#392	#364
Internal Link Dist (ft)		304		883	602	1199
Turn Bay Length (ft)	150		150			
Base Capacity (vph)	68	2402	68	1265	255	334
Starvation Cap Reductn	0	603	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.79	1.16	0.96	1.15	1.11	0.91

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis

9: University & Marlborough

1/29/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	50	1830	90	60	1280	60	100	90	70	70	110	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.99			0.96			0.95	
Flt Protected	0.95	1.00		0.95	1.00			0.98			0.99	
Satd. Flow (prot)	1770	3514		1770	1850			1761			1751	
Flt Permitted	0.05	1.00		0.05	1.00			0.59			0.78	
Satd. Flow (perm)	99	3514		99	1850			1063			1381	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	1989	98	65	1391	65	109	98	76	76	120	109
RTOR Reduction (vph)	0	3	0	0	2	0	0	12	0	0	19	0
Lane Group Flow (vph)	54	2084	0	65	1454	0	0	271	0	0	286	0
Turn Type	Perm		Perm		Perm		Perm		Perm		Perm	
Protected Phases	2		6		6		8		8		4	
Permitted Phases	2		6		6		8		8		4	
Actuated Green, G (s)	75.1	75.1		75.1	75.1			25.1			25.1	
Effective Green, g (s)	75.1	75.1		75.1	75.1			25.1			25.1	
Actuated g/C Ratio	0.68	0.68		0.68	0.68			0.23			0.23	
Clearance Time (s)	4.9	4.9		4.9	4.9			4.9			4.9	
Vehicle Extension (s)	2.9	2.9		2.9	2.9			2.0			2.0	
Lane Grp Cap (vph)	68	2399		68	1263			243			315	
v/s Ratio Prot		0.59			c0.79							
v/s Ratio Perm	0.54			0.66				c0.25			0.21	
v/c Ratio	0.79	0.87		0.96	1.15			1.11			0.91	
Uniform Delay, d1	12.1	13.6		15.9	17.5			42.5			41.3	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	61.4	4.6		97.2	77.7			91.7			27.9	
Delay (s)	73.5	18.2		113.2	95.2			134.1			69.3	
Level of Service	E	B		F	F			F			E	
Approach Delay (s)		19.6			95.9			134.1			69.3	
Approach LOS		B			F			F			E	

Intersection Summary

HCM Average Control Delay	58.1	HCM Level of Service	E
HCM Volume to Capacity ratio	1.14		
Actuated Cycle Length (s)	110.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	102.5%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			

Appendix G

2035 Mitigated Intersection Synchro Sheets

HCM Signalized Intersection Capacity Analysis

8: University & 41st

2/7/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↗		↖	↗		↖	↗			↕	
Volume (vph)	60	970	100	20	1150	40	350	20	40	20	20	60
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00		1.00	1.00			1.00	
Frt	1.00	0.99		1.00	1.00		1.00	0.90			0.92	
Flt Protected	0.95	1.00		0.95	1.00		0.95	1.00			0.99	
Satd. Flow (prot)	1770	3489		1770	1853		1770	1678			1696	
Flt Permitted	0.06	1.00		0.19	1.00		0.68	1.00			0.94	
Satd. Flow (perm)	118	3489		352	1853		1270	1678			1616	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	65	1054	109	22	1250	43	380	22	43	22	22	65
RTOR Reduction (vph)	0	8	0	0	1	0	0	31	0	0	47	0
Lane Group Flow (vph)	65	1155	0	22	1292	0	380	34	0	0	62	0
Turn Type	Perm		Perm		Perm		Perm		Perm			
Protected Phases	2		6		6		8		4			
Permitted Phases	2		6		8		8		4			
Actuated Green, G (s)	63.1	63.1		63.1	63.1		27.1	27.1			27.1	
Effective Green, g (s)	63.1	63.1		63.1	63.1		27.1	27.1			27.1	
Actuated g/C Ratio	0.63	0.63		0.63	0.63		0.27	0.27			0.27	
Clearance Time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0		2.0	2.0			2.0	
Lane Grp Cap (vph)	74	2202		222	1169		344	455			438	
v/s Ratio Prot		0.33			c0.70			0.02				
v/s Ratio Perm	0.55			0.06			c0.30				0.04	
v/c Ratio	0.88	0.52		0.10	1.11		1.10	0.07			0.14	
Uniform Delay, d1	15.3	10.2		7.3	18.4		36.5	27.1			27.6	
Progression Factor	1.00	1.00		1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	74.4	0.9		0.9	60.1		79.7	0.0			0.1	
Delay (s)	89.7	11.1		8.2	78.5		116.2	27.1			27.7	
Level of Service	F	B		A	E		F	C			C	
Approach Delay (s)		15.2			77.3			103.2			27.7	
Approach LOS		B			E			F			C	

Intersection Summary

HCM Average Control Delay	54.7	HCM Level of Service	D
HCM Volume to Capacity ratio	1.10		
Actuated Cycle Length (s)	100.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	97.2%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis

8: University & 41st

2/7/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↗		↖	↗		↖	↗			↕	
Volume (vph)	40	1570	230	20	1150	10	310	10	50	10	10	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00		1.00	1.00			1.00	
Frt	1.00	0.98		1.00	1.00		1.00	0.88			0.91	
Flt Protected	0.95	1.00		0.95	1.00		0.95	1.00			0.99	
Satd. Flow (prot)	1770	3471		1770	1860		1770	1631			1682	
Flt Permitted	0.06	1.00		0.06	1.00		0.77	1.00			0.96	
Satd. Flow (perm)	113	3471		113	1860		1429	1631			1629	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	43	1707	250	22	1250	11	337	11	54	11	11	43
RTOR Reduction (vph)	0	12	0	0	0	0	0	25	0	0	33	0
Lane Group Flow (vph)	43	1945	0	22	1261	0	337	40	0	0	32	0
Turn Type	Perm		Perm		Perm		Perm		Perm			
Protected Phases	2		6		6		8		4			
Permitted Phases	2		6		8		8		4			
Actuated Green, G (s)	66.1	66.1		66.1	66.1		24.1	24.1			24.1	
Effective Green, g (s)	66.1	66.1		66.1	66.1		24.1	24.1			24.1	
Actuated g/C Ratio	0.66	0.66		0.66	0.66		0.24	0.24			0.24	
Clearance Time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0		2.0	2.0			2.0	
Lane Grp Cap (vph)	75	2294		75	1229		344	393			393	
v/s Ratio Prot		0.56			c0.68			0.02				
v/s Ratio Perm	0.38			0.20			c0.24				0.02	
v/c Ratio	0.57	0.85		0.29	1.03		0.98	0.10			0.08	
Uniform Delay, d1	9.3	13.1		7.1	17.0		37.7	29.5			29.4	
Progression Factor	1.00	1.00		0.53	0.49		1.00	1.00			1.00	
Incremental Delay, d2	28.1	4.1		0.9	15.5		42.4	0.0			0.0	
Delay (s)	37.4	17.2		4.7	23.7		80.1	29.6			29.4	
Level of Service	D	B		A	C		F	C			C	
Approach Delay (s)		17.6			23.4			71.9			29.4	
Approach LOS		B			C			E			C	

Intersection Summary

HCM Average Control Delay	25.6	HCM Level of Service	C
HCM Volume to Capacity ratio	1.01		
Actuated Cycle Length (s)	100.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	93.1%	ICU Level of Service	F
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis

8: University & 41st

2/19/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↗		↖	↗		↖	↗			↕	
Volume (vph)	70	1010	110	20	1200	50	400	20	40	30	20	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	0.95		1.00	1.00			1.00	
Frt	1.00	0.99		1.00	0.99		1.00	0.90			0.92	
Flt Protected	0.95	1.00		0.95	1.00		0.95	1.00			0.99	
Satd. Flow (prot)	1770	3487		1770	3518		1770	1678			1695	
Flt Permitted	0.14	1.00		0.14	1.00		0.74	1.00			0.93	
Satd. Flow (perm)	254	3487		254	3518		1370	1678			1592	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	76	1098	120	22	1304	54	435	22	43	33	22	76
RTOR Reduction (vph)	0	13	0	0	5	0	0	28	0	0	16	0
Lane Group Flow (vph)	76	1205	0	22	1353	0	435	37	0	0	115	0
Turn Type	Perm		Perm		Perm		Perm		Perm			
Protected Phases	2		6		6		8		8			4
Permitted Phases	2		6		6		8		8			4
Actuated Green, G (s)	29.3	29.3		29.3	29.3		20.9	20.9			20.9	
Effective Green, g (s)	29.3	29.3		29.3	29.3		20.9	20.9			20.9	
Actuated g/C Ratio	0.49	0.49		0.49	0.49		0.35	0.35			0.35	
Clearance Time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0		2.0	2.0			2.0	
Lane Grp Cap (vph)	124	1703		124	1718		477	585			555	
v/s Ratio Prot		0.35			c0.38			0.02				
v/s Ratio Perm	0.30			0.09			c0.32				0.07	
v/c Ratio	0.61	0.71		0.18	0.79		0.91	0.06			0.21	
Uniform Delay, d1	11.2	12.0		8.6	12.8		18.7	13.0			13.7	
Progression Factor	1.00	1.00		1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	20.6	2.5		3.1	3.7		21.3	0.0			0.1	
Delay (s)	31.8	14.5		11.7	16.5		40.0	13.0			13.8	
Level of Service	C	B		B	B		D	B			B	
Approach Delay (s)		15.5			16.4			36.5			13.8	
Approach LOS		B			B			D			B	

Intersection Summary

HCM Average Control Delay	19.0	HCM Level of Service	B
HCM Volume to Capacity ratio	0.84		
Actuated Cycle Length (s)	60.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	84.2%	ICU Level of Service	E
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis

9: University & Marlborough

2/7/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	40	880	30	40	980	40	60	70	90	80	50	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00		1.00	1.00			1.00	
Frt	1.00	0.99		1.00	0.99		1.00	0.92			0.96	
Flt Protected	0.95	1.00		0.95	1.00		0.95	1.00			0.98	
Satd. Flow (prot)	1770	3522		1770	1852		1770	1705			1754	
Flt Permitted	0.07	1.00		0.25	1.00		0.59	1.00			0.69	
Satd. Flow (perm)	129	3522		470	1852		1091	1705			1244	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	43	957	33	43	1065	43	65	76	98	87	54	54
RTOR Reduction (vph)	0	2	0	0	1	0	0	54	0	0	16	0
Lane Group Flow (vph)	43	988	0	43	1107	0	65	120	0	0	179	0
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases	2			6			8			8		4
Permitted Phases	2			6			8			4		
Actuated Green, G (s)	59.3	59.3		59.3	59.3		20.9	20.9			20.9	
Effective Green, g (s)	59.3	59.3		59.3	59.3		20.9	20.9			20.9	
Actuated g/C Ratio	0.66	0.66		0.66	0.66		0.23	0.23			0.23	
Clearance Time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Vehicle Extension (s)	2.9	2.9		2.9	2.9		2.0	2.0			2.0	
Lane Grp Cap (vph)	85	2321		310	1220		253	396			289	
v/s Ratio Prot		0.28			c0.60			0.07				
v/s Ratio Perm	0.33			0.09			0.06				c0.14	
v/c Ratio	0.51	0.43		0.14	0.91		0.26	0.30			0.62	
Uniform Delay, d1	7.9	7.3		5.8	13.0		28.2	28.5			31.0	
Progression Factor	1.00	1.00		1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	19.9	0.6		0.9	11.3		0.2	0.2			2.8	
Delay (s)	27.8	7.8		6.7	24.3		28.4	28.7			33.7	
Level of Service	C	A		A	C		C	C			C	
Approach Delay (s)		8.7			23.7			28.6			33.7	
Approach LOS		A			C			C			C	

Intersection Summary

HCM Average Control Delay	19.0	HCM Level of Service	B
HCM Volume to Capacity ratio	0.83		
Actuated Cycle Length (s)	90.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	85.6%	ICU Level of Service	E
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis

8: University & 41st

2/19/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	50	1640	260	20	1200	10	350	10	60	10	10	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	0.95		1.00	1.00			1.00	
Frt	1.00	0.98		1.00	1.00		1.00	0.87			0.90	
Flt Protected	0.95	1.00		0.95	1.00		0.95	1.00			0.99	
Satd. Flow (prot)	1770	3466		1770	3535		1770	1624			1672	
Flt Permitted	0.14	1.00		0.07	1.00		0.76	1.00			0.97	
Satd. Flow (perm)	269	3466		135	3535		1418	1624			1627	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	1783	283	22	1304	11	380	11	65	11	11	54
RTOR Reduction (vph)	0	14	0	0	1	0	0	14	0	0	39	0
Lane Group Flow (vph)	54	2052	0	22	1314	0	380	62	0	0	37	0
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases	2			6			8			8		4
Permitted Phases	2			6			8			4		
Actuated Green, G (s)	55.0	55.0		55.0	55.0		25.2	25.2			25.2	
Effective Green, g (s)	55.0	55.0		55.0	55.0		25.2	25.2			25.2	
Actuated g/C Ratio	0.61	0.61		0.61	0.61		0.28	0.28			0.28	
Clearance Time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Vehicle Extension (s)	1.0	1.0		1.0	1.0		2.0	2.0			2.0	
Lane Grp Cap (vph)	164	2118		83	2160		397	455			456	
v/s Ratio Prot		c0.59			0.37			0.04				
v/s Ratio Perm	0.20			0.16			c0.27				0.02	
v/c Ratio	0.33	0.97		0.27	0.61		0.96	0.14			0.08	
Uniform Delay, d1	8.5	16.7		8.1	10.8		31.9	24.2			23.9	
Progression Factor	1.00	1.00		1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	5.3	13.5		7.6	1.3		33.6	0.0			0.0	
Delay (s)	13.8	30.2		15.8	12.1		65.5	24.3			23.9	
Level of Service	B	C		B	B		E	C			C	
Approach Delay (s)		29.7			12.2			58.6			23.9	
Approach LOS		C			B			E			C	

Intersection Summary

HCM Average Control Delay	27.0	HCM Level of Service	C
HCM Volume to Capacity ratio	0.97		
Actuated Cycle Length (s)	90.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	87.8%	ICU Level of Service	E
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis

9: University & Marlborough

2/7/2013



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	50	1830	90	60	1280	60	100	90	70	70	110	100
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Lane Util. Factor	1.00	0.95		1.00	1.00		1.00	1.00			1.00	
Frt	1.00	0.99		1.00	0.99		1.00	0.93			0.95	
Flt Protected	0.95	1.00		0.95	1.00		0.95	1.00			0.99	
Satd. Flow (prot)	1770	3514		1770	1850		1770	1741			1751	
Flt Permitted	0.05	1.00		0.05	1.00		0.36	1.00			0.70	
Satd. Flow (perm)	88	3514		88	1850		672	1741			1238	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	54	1989	98	65	1391	65	109	98	76	76	120	109
RTOR Reduction (vph)	0	3	0	0	1	0	0	19	0	0	17	0
Lane Group Flow (vph)	54	2084	0	65	1455	0	109	155	0	0	288	0
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases	2			6			8			8		4
Permitted Phases	2			6			8			4		
Actuated Green, G (s)	85.1	85.1		85.1	85.1		25.1	25.1			25.1	
Effective Green, g (s)	85.1	85.1		85.1	85.1		25.1	25.1			25.1	
Actuated g/C Ratio	0.71	0.71		0.71	0.71		0.21	0.21			0.21	
Clearance Time (s)	4.9	4.9		4.9	4.9		4.9	4.9			4.9	
Vehicle Extension (s)	2.9	2.9		2.9	2.9		2.0	2.0			2.0	
Lane Grp Cap (vph)	62	2492		62	1312		141	364			259	
v/s Ratio Prot		0.59			c0.79			0.09				
v/s Ratio Perm	0.62			0.74			0.16				c0.23	
v/c Ratio	0.87	0.84		1.05	1.11		0.77	0.43			1.11	
Uniform Delay, d1	13.3	12.5		17.5	17.5		44.8	41.2			47.5	
Progression Factor	1.00	1.00		1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	81.5	3.5		128.4	60.3		20.9	0.3			89.8	
Delay (s)	94.8	16.0		145.9	77.7		65.7	41.5			137.3	
Level of Service	F	B		F	E		E	D			F	
Approach Delay (s)		18.0			80.6			50.8			137.3	
Approach LOS		B			F			D			F	

Intersection Summary

HCM Average Control Delay	51.1	HCM Level of Service	D
HCM Volume to Capacity ratio	1.11		
Actuated Cycle Length (s)	120.0	Sum of lost time (s)	9.8
Intersection Capacity Utilization	108.0%	ICU Level of Service	G
Analysis Period (min)	15		
c Critical Lane Group			