



**RETAINING WALL,
FACE OF WALL OUTLET**


RETAINING WALL, GUTTER OUTLET




WALL DRAIN DETAIL

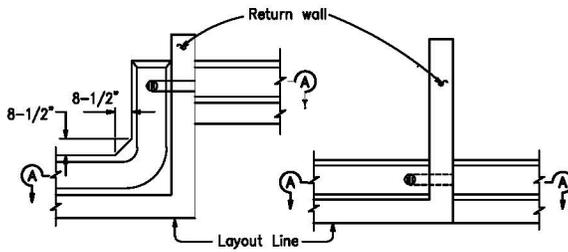


**PLAN-OFFSET WALL
PLAN-CONTINUOUS WALL
DRAIN THROUGH RETURN WALL**




SECTION A-A

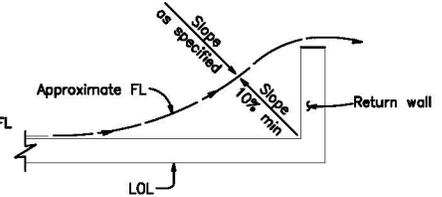

**WALL DRAINAGE
WHERE GUTTER NOT REQUIRED**

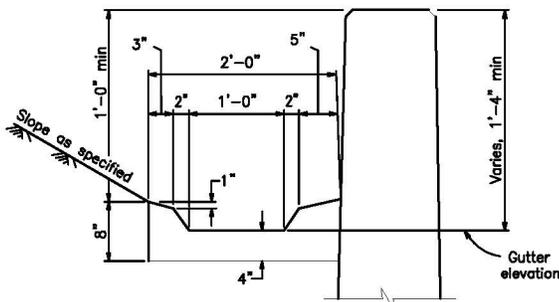

TYPICAL GUTTER DETAIL

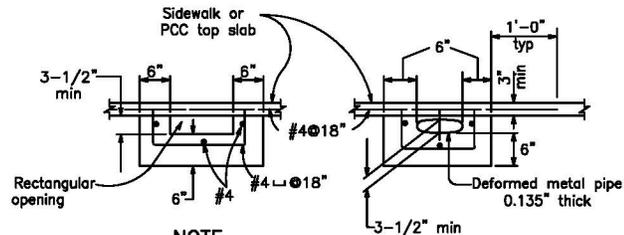

NOTE


Area of opening to be not less than that of pipe from wall gutter. Make opening transition in wall. Edge opening in curb face to 3/4" minimum radius.

OUTLET DETAIL - SECTION B-B



GRATE DETAIL

Sizes to fit standard hubs

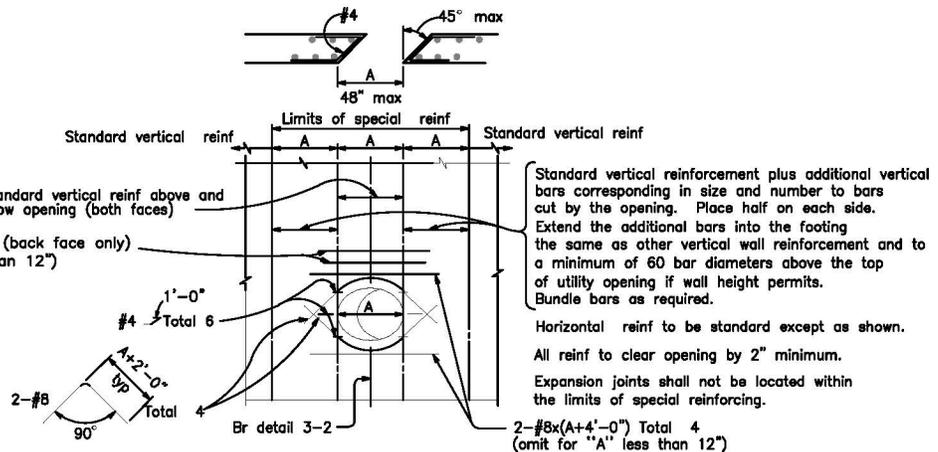

RETAINING WALL UTILITY OPENING

Max size of opening (A) = 48" to be used in conjunction with C-13

Revision	By	Approved	Date
ORIGINAL		Kercheval	12/75
Add Metric		T. Stanton	03/03
Delete Metric	S.S.	T. Shell	03/11

SAN DIEGO REGIONAL STANDARD DRAWING

**REINFORCED CONCRETE
RETAINING WALL DETAILS No. 2**

RECOMMENDED BY THE SAN DIEGO REGIONAL STANDARDS COMMITTEE

T. Stanton 7/26/2012

Chairperson R.C.E. 19246 Date

**DRAWING
NUMBER C-14**