



Punch 1" hole in CSP.  
Place pipe so bars of grate will be parallel with main surface flow.

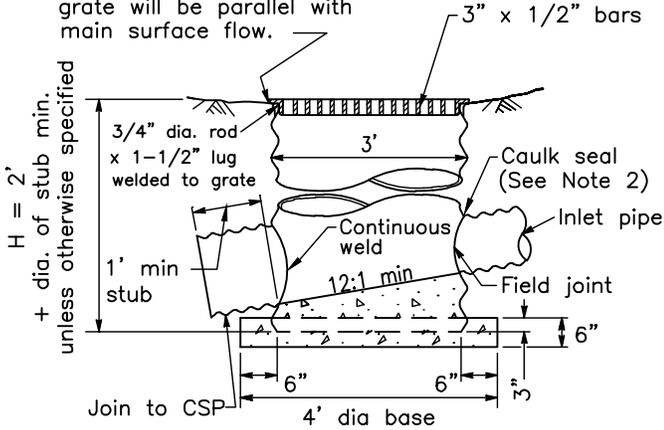


SECTION A-A  
TYPE A

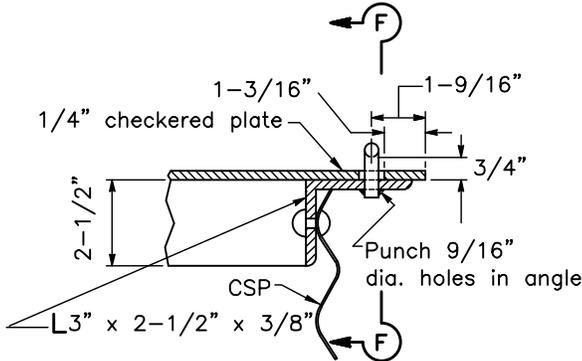


DETAIL "B"

**NOTES**


1. All components shall be galvanized.
2. Inlet and outlet pipes shall be set at factory and positioned as shown on plans.
3. See D-17B for ladder and step details.
4. See D-17A for additional grate details.
5. Grate to be provided when specified.
6. Grate detail shall be as shown on D-17A unless otherwise approved by Agency.

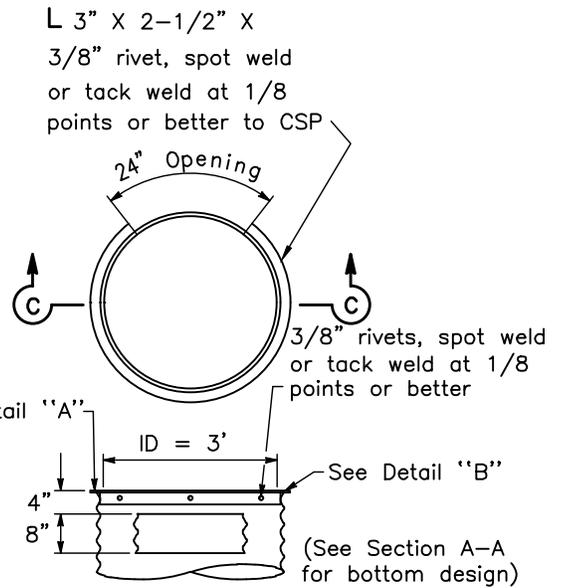

SECTION C-C  
TYPE B

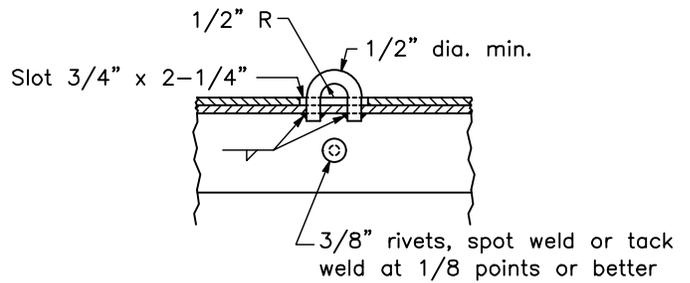

SECTION F-F

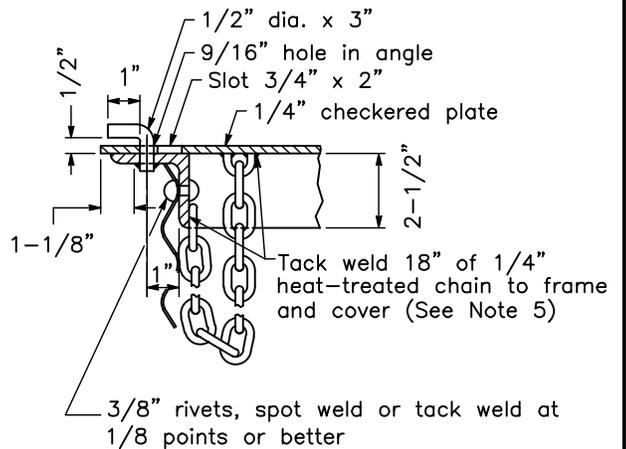

DETAIL "A"

Revision	By	Approved	Date
ORIGINAL		Kercheval	12/75
Add Metric		T. Stanton	03/03
Reformatted		T. Stanton	04/06
Edited	S.S.	T. Regello	03/11

**SAN DIEGO REGIONAL STANDARD DRAWING**

**CORRUGATED STEEL PIPE INLETS  
TYPES A AND B**

RECOMMENDED BY THE SAN DIEGO REGIONAL STANDARDS COMMITTEE	
<i>T. Stanton</i> 7/26/2012	
Chairperson R.C.E. 19246 Date	
DRAWING NUMBER	<b>D-16</b>