



For cover less than 2', extend c bars full length, top slab only. Provide additional #4 @ 18"± and adjust quantities

Provide paving notch when top is exposed and where PCC pavement or approach slab is used

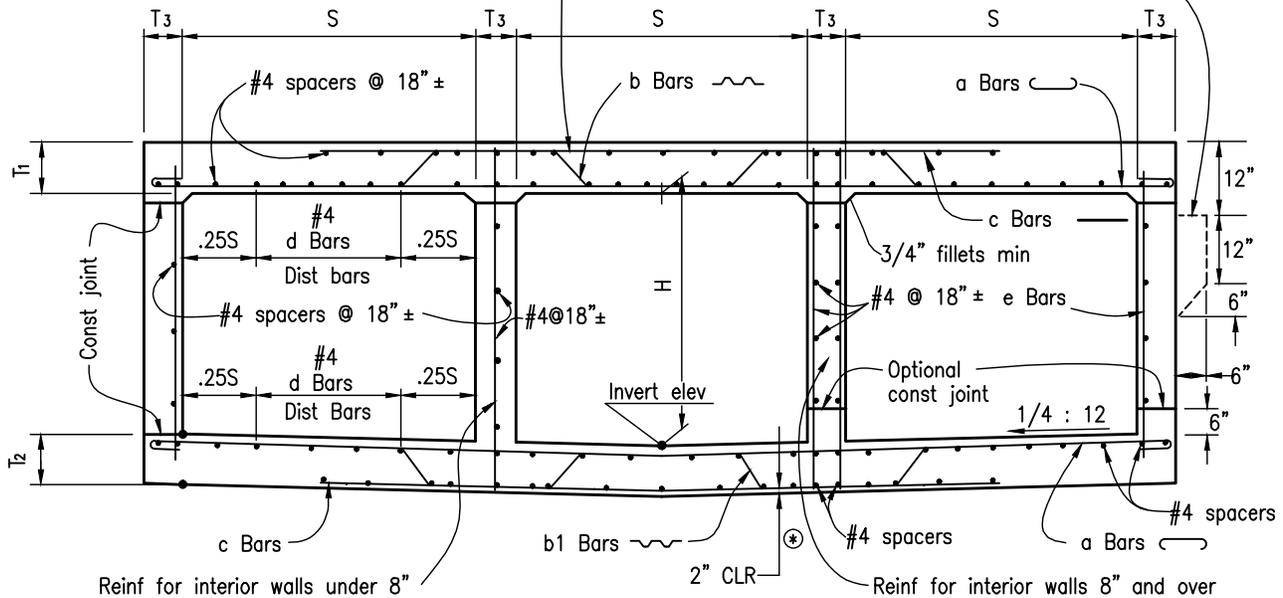

TYPICAL SECTION

⊗ For reinforcement clearance, except at bottom, see "Miscellaneous Details" on D-81A and D-81B.

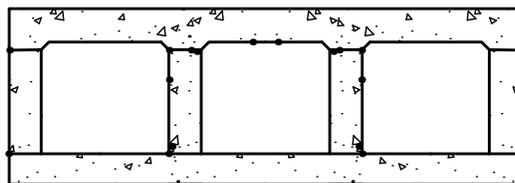

FLAT INVERT ALTERNATIVE

(When specified)

NOTES

1. Spacers shall be #4 @ 18" oc in top slab and sidewall mats.
2. Remaining #4 Spacers shall be equally distributed in bottom slab mats.

Revision	By	Approved	Date	SAN DIEGO REGIONAL STANDARD DRAWING TRIPLE BOX CULVERT DETAILS NO.2	RECOMMENDED BY THE SAN DIEGO REGIONAL STANDARDS COMMITTEE
ORIGINAL		Kercheval	12/75		 7/26/2012 Chairperson R.C.E. 19246 Date
Add Metric		T. Stanton	03/03		
Reviewed		T. Stanton	04/06		
Edited	S.S.	T. Regello	03/11		
				DRAWING NUMBER D-78G	