

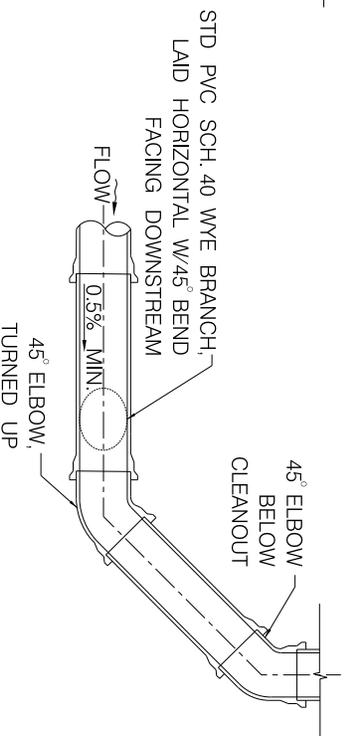


PROFILE

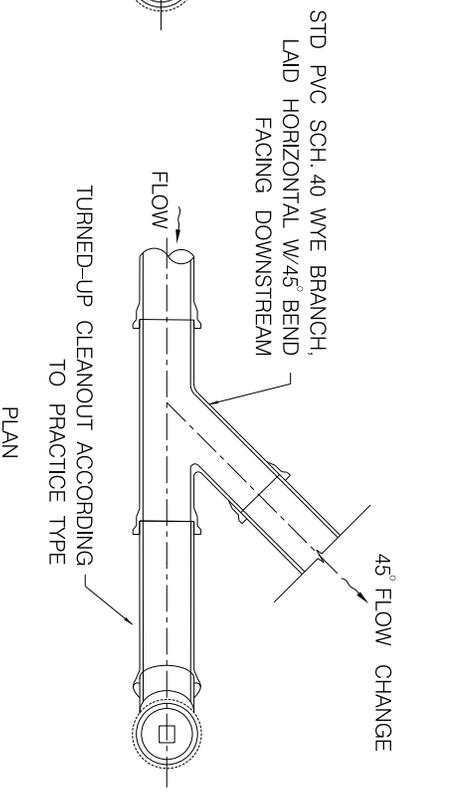

PROFILE

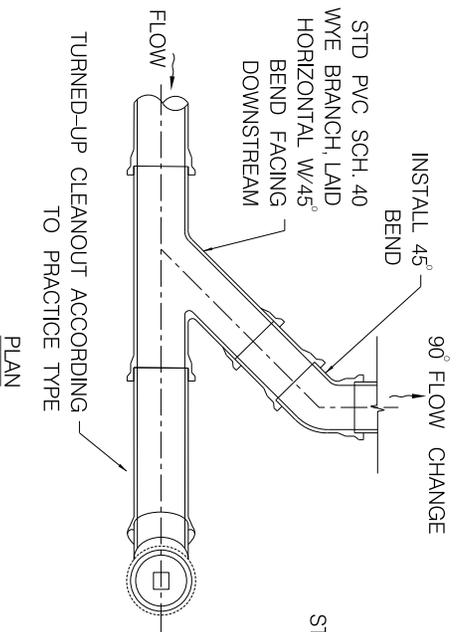

NOTES:

1. PIPES AND FITTINGS SHALL BE PROPERLY ALIGNED AND MAINTAINED WHILE CONCRETE IS BEING PLACED AND ALLOWED TO HARDEN. JOINTS FOR PIPES AND FITTINGS SHALL BE ASSEMBLED PRIOR TO PLACING CONCRETE. CONCRETE FOR BEDDING, ENCASEMENT, AND WALL SUPPORT FOR PIPES AND FITTINGS SHALL BE PLACED UNIFORMLY AROUND THE PIPE AND FITTINGS AS SHOWN HEREON TO MAINTAIN PROPER ALIGNMENT, AND SHALL BE CLASS 420-C-2000.

DRAFT

SHEET 2 OF 2

REVISION	BY	APPROVED	DATE
ORIGINAL	JT	J. NAGELVOORT	10/15

CITY OF SAN DIEGO – STANDARD DRAWING

RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE

CLEANOUT FOR 8" STORM DRAIN PERFORATED OR SOLID

COORDINATOR	R.C.E. 56523	DATE
DRAWING NUMBER	SDD-125	