


TYPICAL BIORETENTION SECTION
BATTEN LOCATIONS **A**
 VAR NOT TO SCALE

NOTES:

1. THE SURFACE OF THE EXISTING/PROPOSED SIDEWALK OR EXTENDED CURB TO WHICH THE GEOMEMBRANE LINER IS TO BE ATTACHED SHOULD BE CONSTRUCTED OR FORMED TO LIMIT DAMAGE TO THE GEOMEMBRANE BY REMOVING IRREGULARITIES ON THE CONCRETE SURFACE TO PREVENT STRESS POINTS IN THE GEOMEMBRANE.
2. IF IRREGULARITIES (I.E., SHARP PROTRUSIONS EXCEEDING 1/2 INCH FROM SURFACE FACE) CAN NOT BE REMOVED FROM AN EXISTING SAW-CUT OR FORMED STRUCTURE, A PROTECTIVE GEOTEXTILE LAYER SHOULD BE PLACED BETWEEN THE SURFACE AND THE GEOMEMBRANE.

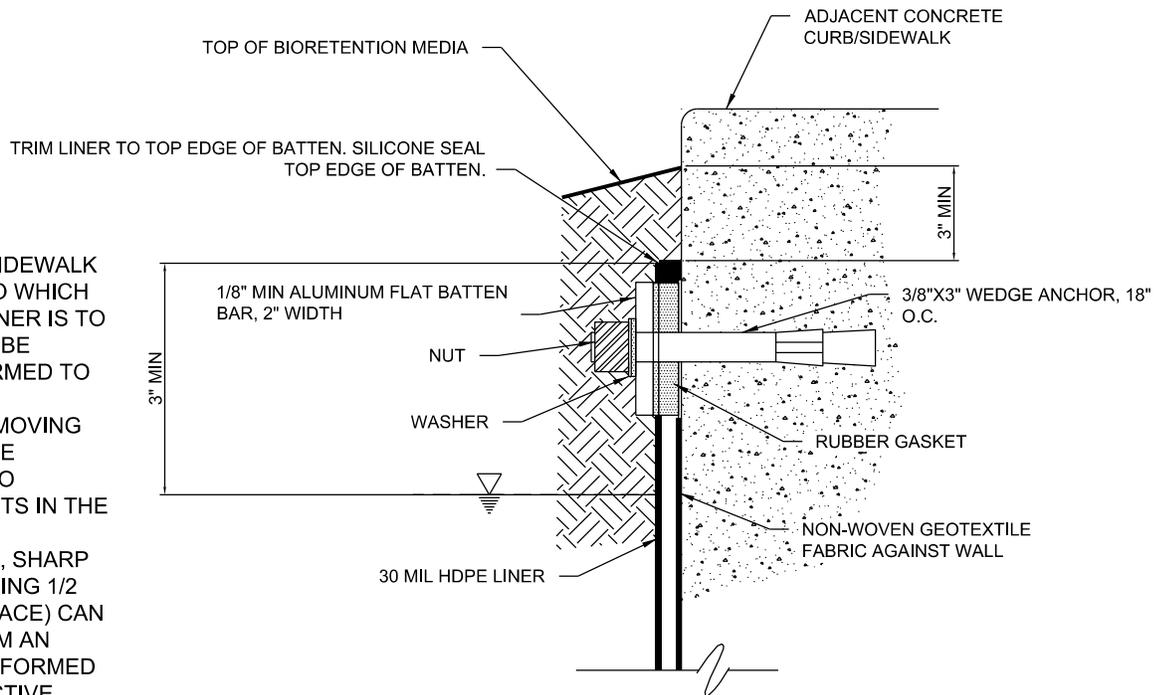

BATTEN ATTACHMENT WITH ANCHOR BOLT **B**
 VAR NOT TO SCALE

REVISION	BY	APPROVED	DATE
ORIGINAL	JT	J. NAGELVOORT	10/15

CITY OF SAN DIEGO - STANDARD DRAWING

VERTICAL WALL LINER ATTACHMENT

RECOMMENDED BY THE CITY OF SAN DIEGO
 STANDARDS COMMITTEE

COORDINATOR R.C.E. 56523 DATE

DRAWING NUMBER **SDD-127**