



PROFILE VIEW
NOT TO SCALE

RIP RAP ENERGY DISSIPATION PAD PER STD DWG, MODIFIED AS SHOWN

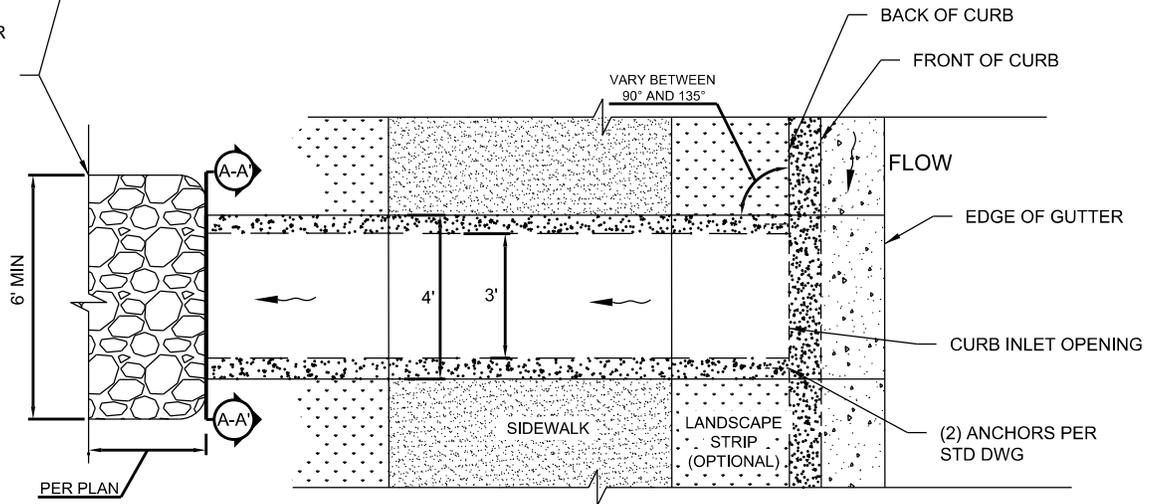

PLAN VIEW
NOT TO SCALE

#4 REBAR @ 6" O.C. BOTH WAYS

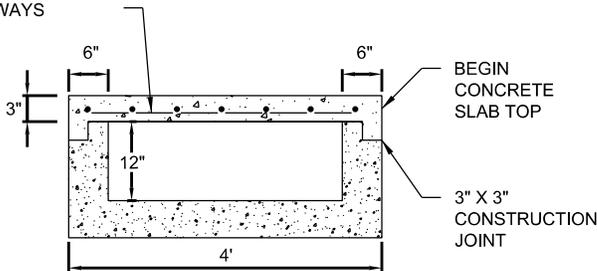

SECTION A-A
VAR NOT TO SCALE

CONSTRUCTION NOTES:

1. UTILIZE CONCRETE TYPE, REINFORCING STEEL, AND CONSTRUCTION NOTES PER STD DWG, EXCEPT AS MODIFIED.
2. COMPACT EXISTING SOILS WITH HAND HELD "JUMPING JACK" GASOLINE POWERED COMPACTOR PRIOR TO PLACING FORMS AND POURING CONCRETE.
3. SAW CUT EXISTING SIDEWALK, CURB, AND GUTTER AS NEEDED FOR CONSTRUCTION OF CURB-FACE INLET.
4. SLOPE OF INITIAL INLET DROP BASED ON ELEVATIONS A AND C, WHICH VARY BASED ON SITE CONSTRAINTS AND REQUIRED CURB OPENING HEIGHT.

STRUCTURE FEATURE TABLE

| LOCATION | COMMENTS |
|----------|-----------------------------|
| A | INV. OF CURB DROP AT GUTTER |
| B | TOP OF CURB |
| C | BEGIN 0.5% SLOPE |
| D | FINISHED GRADE OF SURFACE |
| E | END OF FLUME/0.5% SLOPE |
| F | BOTTOM OF FOOTING |

| REVISION | BY | APPROVED | DATE |
|----------|----|---------------|-------|
| ORIGINAL | JT | J. NAGELVOORT | 10/15 |
| | | | |
| | | | |
| | | | |

CITY OF SAN DIEGO - STANDARD DRAWING

RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE

CURB-FACE INLET

COORDINATOR R.C.E. 56523 DATE

DRAWING NUMBER **SDD-137**