


NOTES:

1. SIDEWALK CROSS SLOPE SHALL BE 1.5%.
2. WHEN DISTANCE FROM "AREA TO BE REMOVED" TO EXISTING JOINT, EDGE OR SCORE MARK IS LESS THAN MINIMUM SHOWN, "AREA TO BE REMOVED" SHALL BE EXTENDED TO JOINT, EDGE OR SCORE MARK.
3. ALL HISTORICAL STAMPS / IMPRESSIONS (STREET NAME, CONTRACTOR NAME, AND DATE) SHALL BE PRESERVED.
4. FOR DESIGNATED URBANIZED COMMUNITIES, SIDEWALK DESIGN (SCORING PATTERN, COLOR, TEXTURE) SHALL BE IN CONFORMANCE WITH HISTORIC DESIGN ON ADJACENT PROPERTIES.

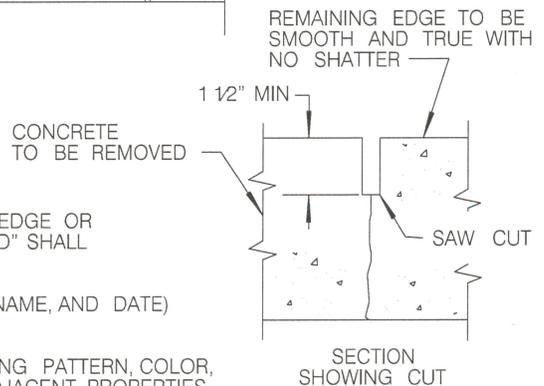

REVISION	BY	APPROVED	DATE
ORIGINAL*	KA	J. NAGELVOORT	01/12
UPDATED	RB	J. NAGELVOORT	10/15

CITY OF SAN DIEGO - STANDARD DRAWING

**CONCRETE CURB, GUTTER,  
SIDEWALK AND PAVEMENT  
REMOVAL AND REPLACEMENT**

RECOMMENDED BY THE CITY OF SAN DIEGO  
STANDARDS COMMITTEE

*CA Chungca 10/15/15*

COORDINATOR R.C.E. 56523 DATE

DRAWING NUMBER **SDG-156**