


PLAN

CONTACT JOINTS PER G-10 WHEN SEPARATE POURS ARE MADE

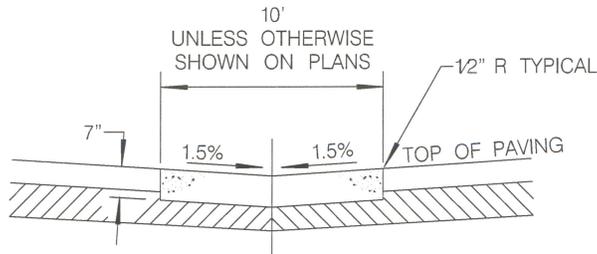


SECTION A-A

NOTES:

1. CONCRETE SHALL BE 560-C-3250.
2. - - - - WEAKENED PLANE JOINTS.
3. ← ← TYPICAL FLOWLINES.
4. o = ELEVATIONS TO BE SHOWN ON PLANS.
5. RETURN SEGMENTS TO BE 7" THICK.
6. CURB BETWEEN POINT OF CURB RETURNS (PCR) SHALL BE A MONOLITHIC POUR WITH THE CROSS GUTTER.
7. IN ALL CASES SUBGRADE SHALL BE COMPACTED TO 95% MIN RELATIVE COMPACTION TO A DEPTH OF 12"
8. ALL HISTORICAL STAMPS / IMPRESSIONS (STREET NAME, CONTRACTOR NAME, AND DATE) SHALL BE PRESERVED.

LEGEND ON PLANS



REVISION	BY	APPROVED	DATE
ORIGINAL*	KA	J. NAGELVOORT	01/12
UPDATED	AR	J. NAGELVOORT	10/15

CITY OF SAN DIEGO - STANDARD DRAWING

RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE

*CABUNGA* 10/5/15  
COORDINATOR R.C.E. 56523 DATE

**CROSS GUTTER**

DRAWING NUMBER **SDG-157**