



MEMORANDUM

TO: Ms. Rita Mahoney, Colrich
FROM: Jonathan Sanchez, TE; Chen Ryan Associates
DATE: January 14, 2021
RE: Otay Mesa Lumina II – Traffic Analysis Memorandum, PTS# 625830

The purpose of this Traffic Analysis Memorandum is to identify and document potential significant transportation impacts associated with the development of the proposed Otay Mesa Lumina II project (the "Project"), as well as to recommend mitigation measures for any identified significant traffic impact on study area intersections or roadways. The project intends to tier off the Otay Mesa Community Plan Final Environmental Impact Report (OMCPU FEIR) as discussed later in this report.

Project Description

The 4.46-acre project site is located just west of Cactus Road, south of Airway Road within the City of San Diego Otay Mesa Community Planning Area (CPA). This project is part of the approved Otay Mesa Central Village Specific Plan. The project proposes to develop 132 multi-family units at a density of over 20 du/acre. Project access is proposed via Street "C", located off of Cactus Road. The project opening year is anticipated to take place in 2027.

The following facilities are assumed to be constructed by the project as part of project frontage and shall be completed and operational prior to first occupancy:


Roadway Segment


- Cactus Road, between Street "C" and southern property boundary – This segment serves as the project frontage and will be improved to a 3-Lane Major Arterial (1 northbound lane and 2 southbound lanes with a raised median). This roadway is classified as a 4-Lane Major Arterial in the currently adopted Otay Mesa Community Plan, which is consistent with the project description in the Otay Mesa Public Facilities Financing Plan (PFFP).
- Street "C", between Village Way and Cactus Road – This segment serves as the project frontage and will be constructed full width as a 2-Lane Collector. This roadway is classified as a residential collector in the Central Village Specific Plan.

Intersection

- Cactus Road / Street "C" – Construction of an all-way stop controlled (AWSC) T-intersection with an additional southbound through lane at the project frontage to match the roadway cross-section mentioned above. However, the Central Village Specific Plan Transportation Facilities Trigger Analysis (TFTA) identifies this intersection as signalized. Therefore, appropriate design measures, such as the layout of the traffic signal foundation will be taken into consideration with construction of this intersection. Full buildout of the Central Village Specific Plan will trigger the need for signalization of this intersection and the applicant shall contribute 25% towards the future signalization of this intersection because the project fronts one of four corners at this intersection. Per mitigation measure TRF-1 in the Central Village Specific Plan FEIR, March 17, 2017 (SCH No. 2004651076)

Figure 1 displays the Project location while **Figure 2** displays the proposed site plan, respectively.

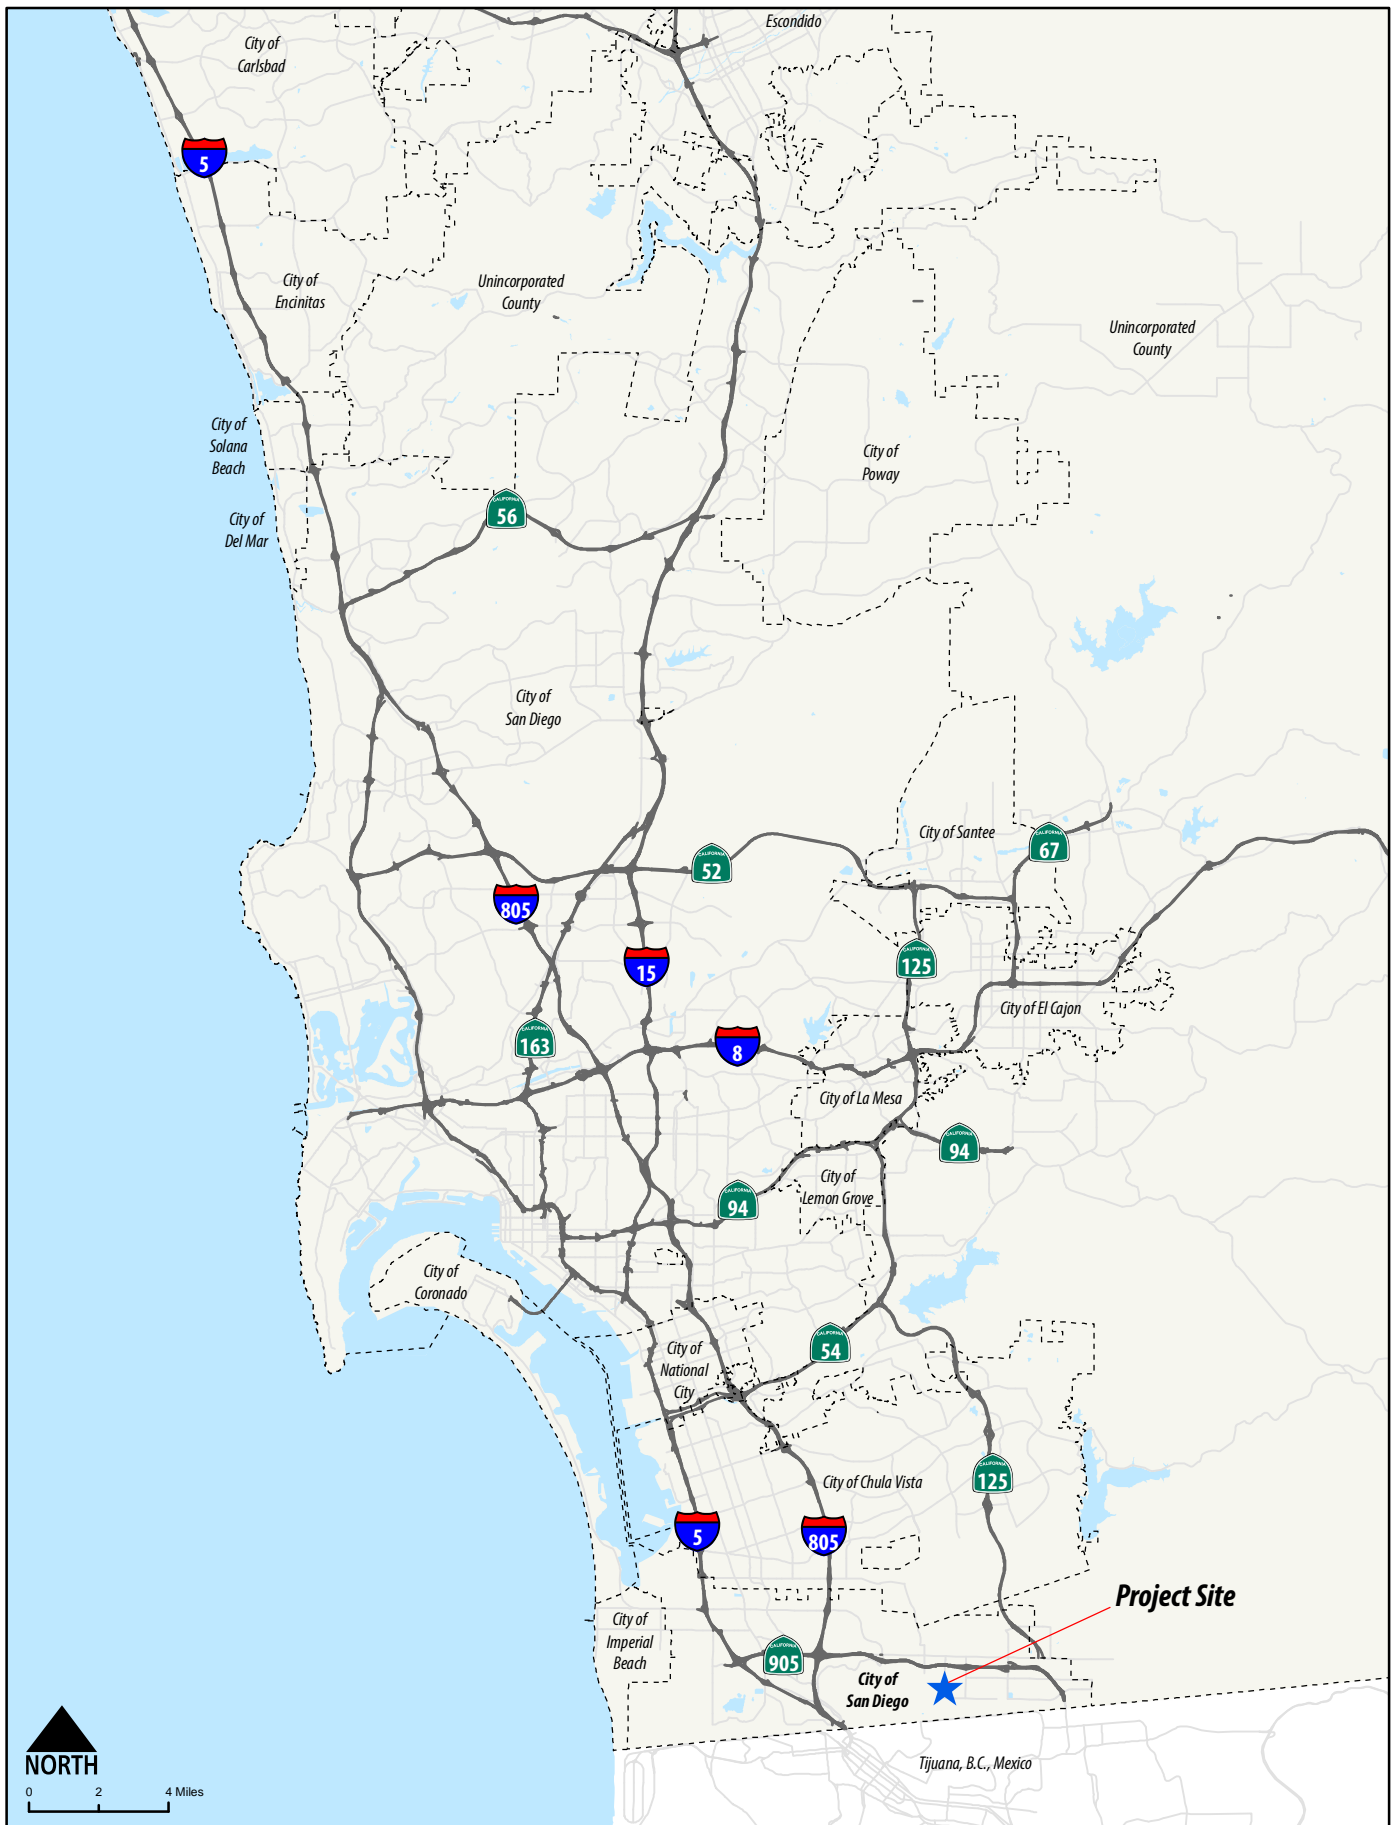

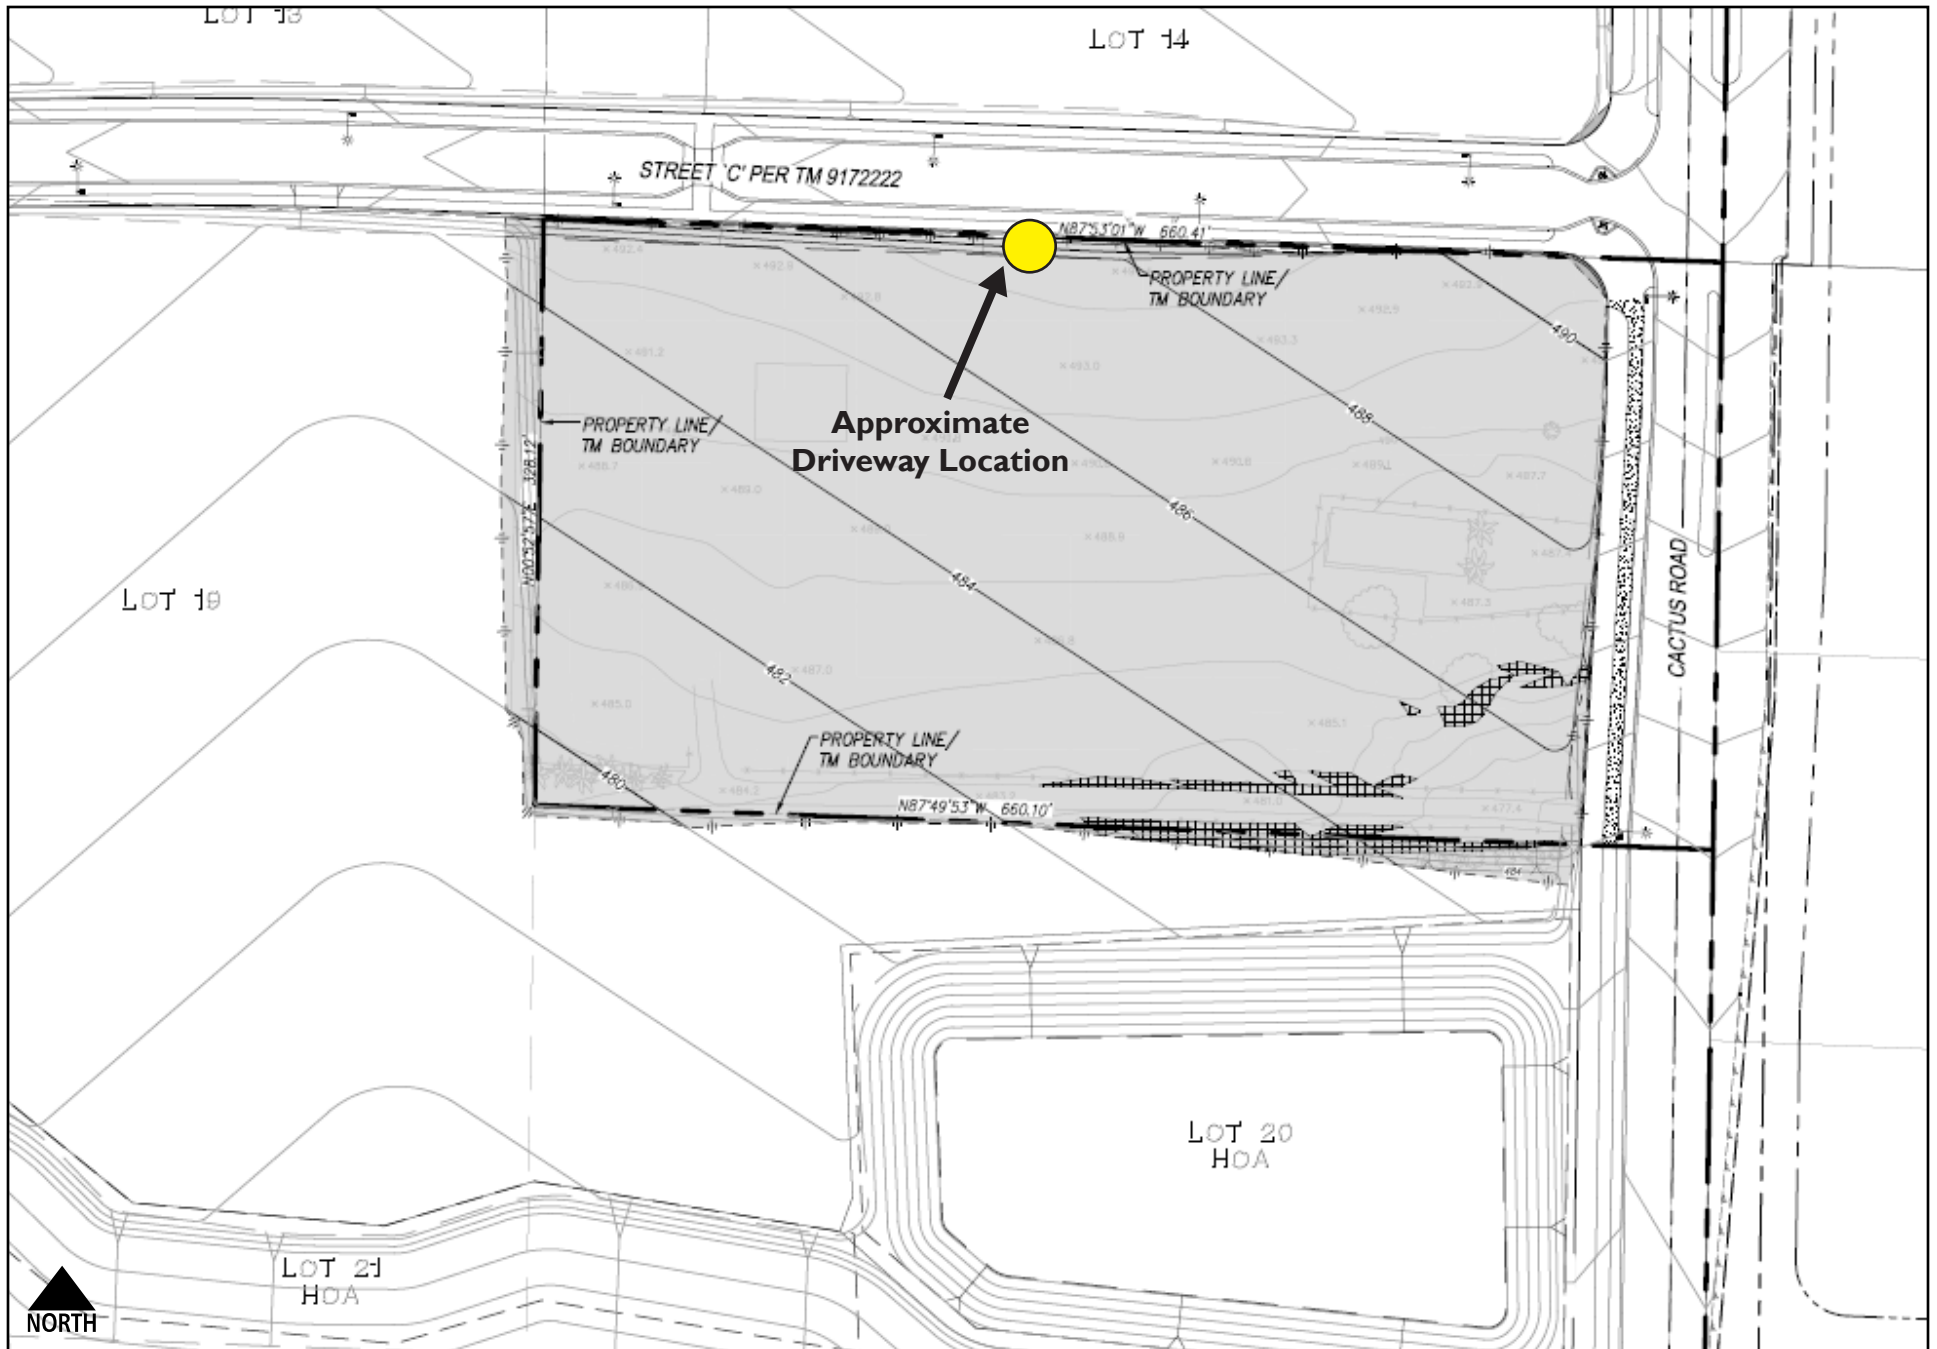

Project Trip Generation

Project trip generation estimates were derived utilizing the trip generation rates outlined in Table 1 of the City of San Diego Land Development Code – Trip Generation Manual, May 2003. **Table 1** displays the proposed project's trip generation.

Table 1 Otay Mesa Lumina II – Trip Generation

Land Use	Units	Trip Rate	ADT	AM Peak Hour					PM Peak Hour				
				%	Trips	Split	In	Out	%	Trips	Split	In	Out
Multi-Family	132	6 / DU	792	8%	64	2:8	13	51	9%	72	7:3	50	22

Source: City of San Diego Land Development Code – Trip Generation Manual, May 2003.

As shown in Table 1, the proposed project would generate a total of 792 daily trips, including 64 (13-in / 51-out) AM peak hour trips and 72 (50-in / 22-out) PM peak hour trips.

Project Distribution

Since the project is anticipated to have an opening year by 2027, the same project trip distribution (Year 2027) utilized in the Otay Mesa Lumina Transportation Impact Study, February 2019, was employed for the analysis of Otay Mesa Lumina II. **Figure 3** displays the project trip distribution patterns associated with the proposed project.

Project Assignment

Based upon the project trip distribution patterns, the daily and AM/PM peak hour project trips were assigned to the study area roadway network. **Figure 4** displays the assignment of project trips to the roadway network and intersections.

Project Study Area


This section documents the project study area roadway and intersection configurations, traffic volumes and traffic operations.


Roadway Segments

- Cactus Road, between Airway Road and Siempre Viva Road
- Street C, between Cactus Road and Village Way

After implementation of the proposed project, the roadway segment of Cactus Road, between Airway Road and Siempre Viva Road will be divided into three (3) study segments as follows:

- Cactus Road, between Airway Road and Street "C";
- Cactus Road, between Street "C" and southern property boundary; and
- Cactus Road, between southern property boundary and Siempre Viva Road.

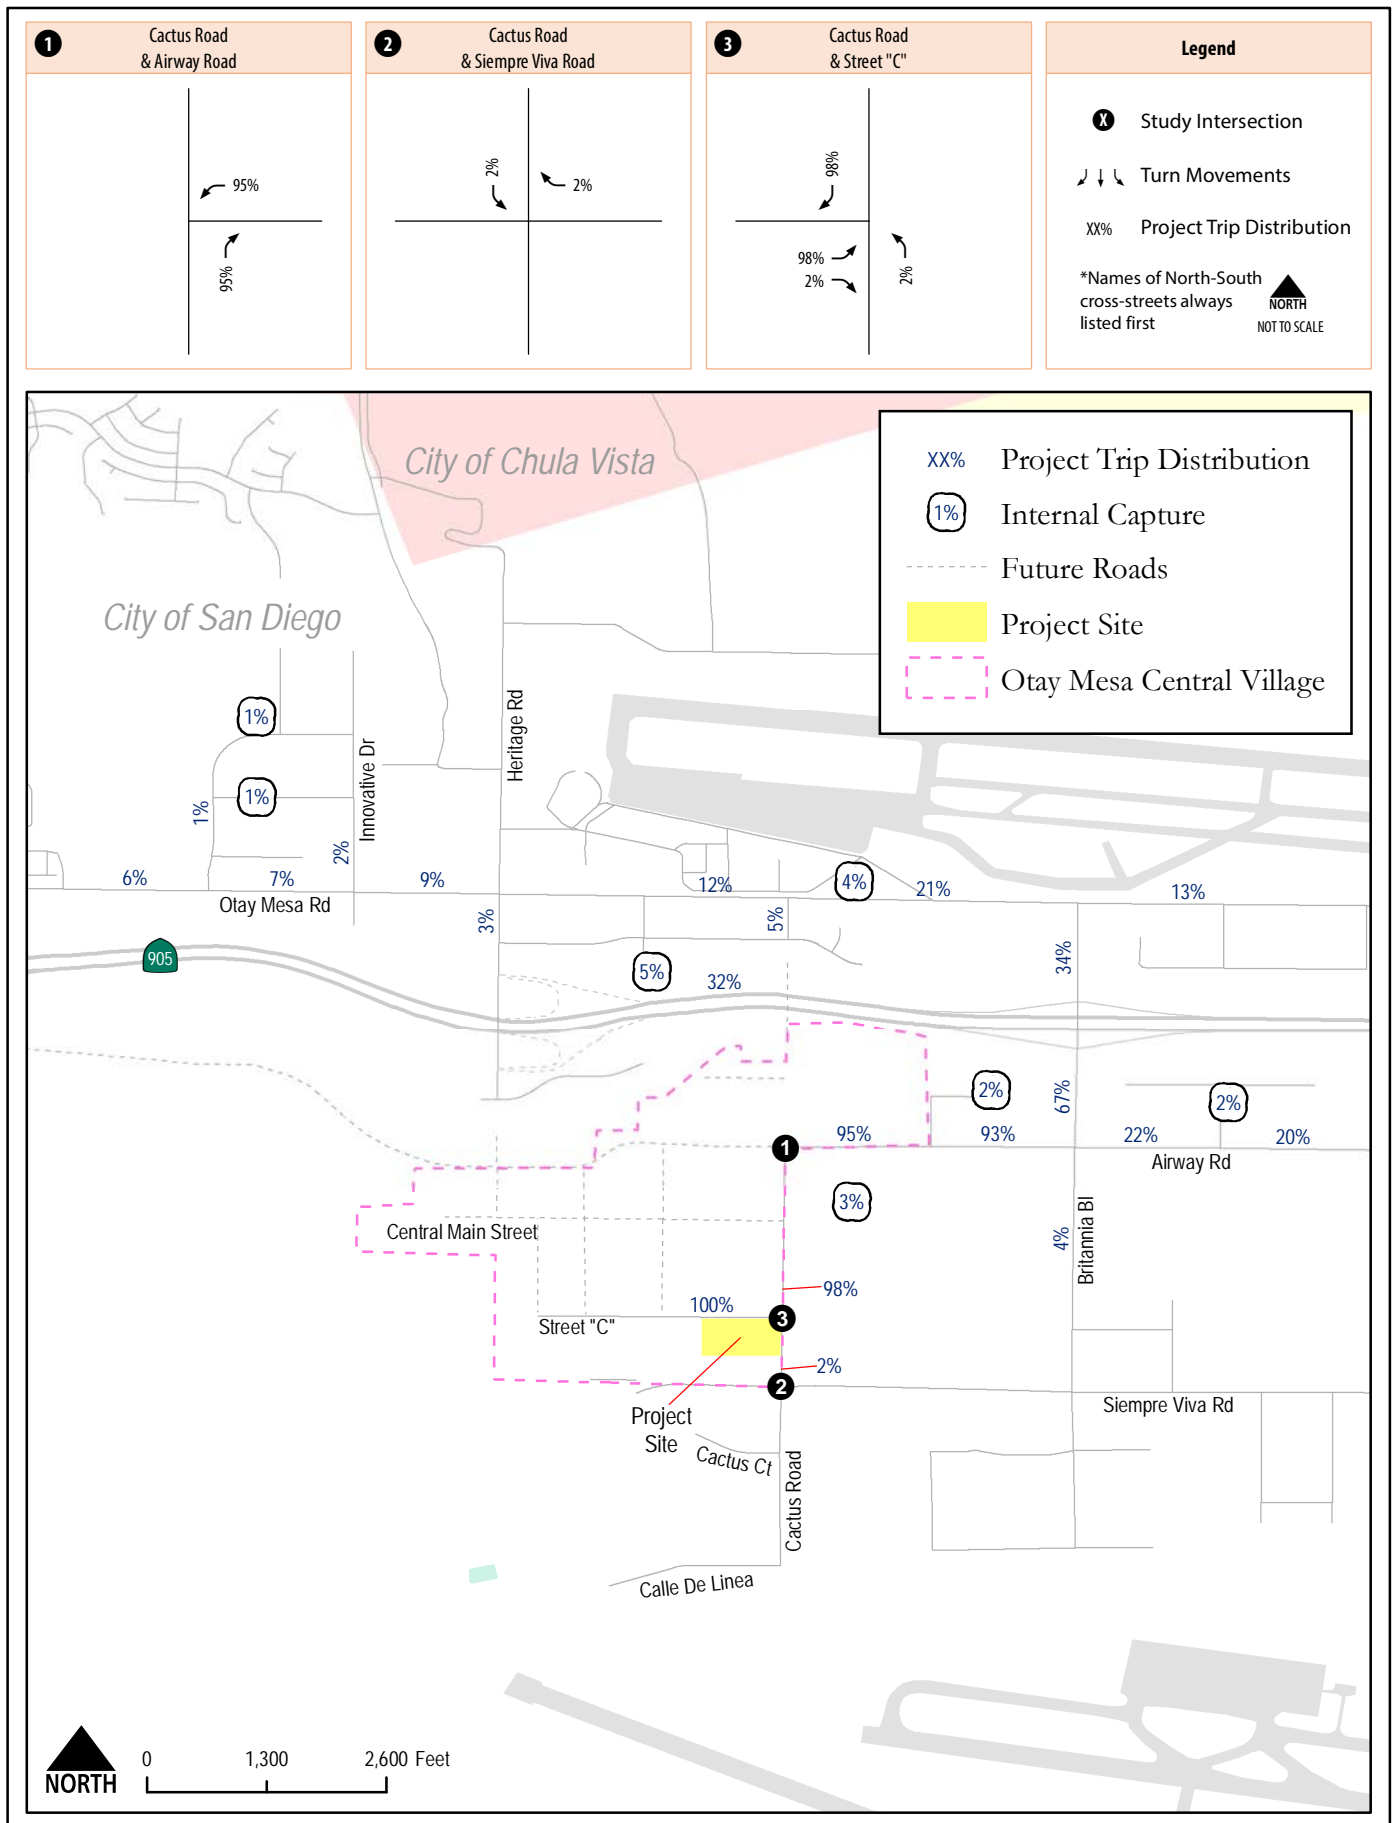

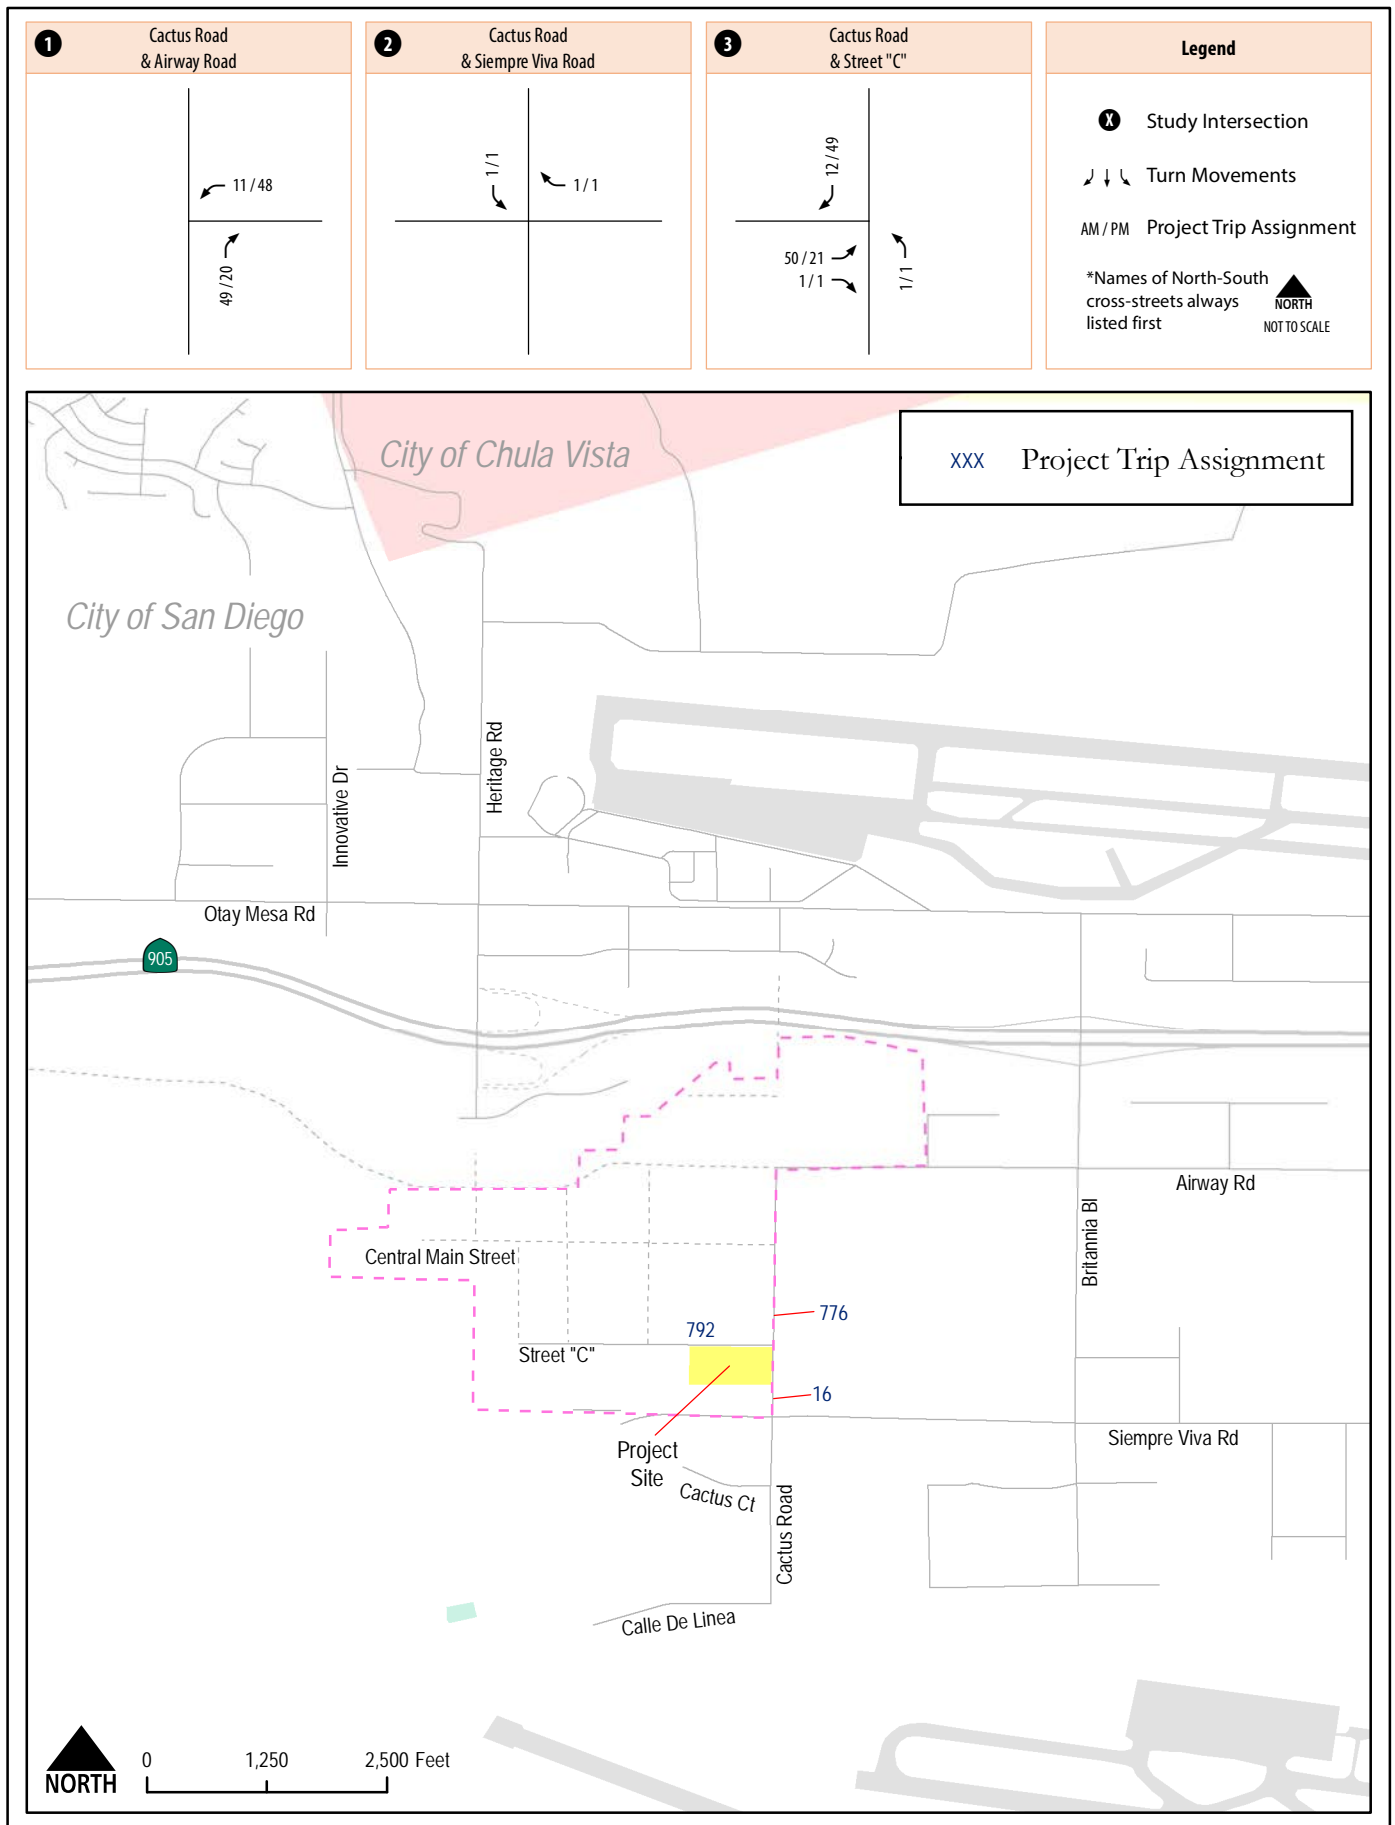


However, under Near-Term Year (Opening Day) 2027 conditions, due to other developments within the Central Village such as Lumina and Lumina III, the roadway segment of Cactus Road between Airway Road and Siempre Viva Road will be divided into four (4) study segments as follows:

- Cactus Road, between Airway Road and Central Main Street;
- Cactus Road, between Central Main Street and Street "C";
- Cactus Road, between Street "C" and southern property boundary; and
- Cactus Road, between southern property boundary and Siempre Viva Road.

Intersections

1. Cactus Road / Airway Road
2. Cactus Road / Siempre Viva Road
3. Cactus Road / Street "C"
4. Cactus Road / Central Main Street

Freeway mainline segments were not analyzed since the Project is not anticipated to add more than 50 peak hour trips, in either direction, to a freeway mainline segment. **Figure 5** displays the project study area.

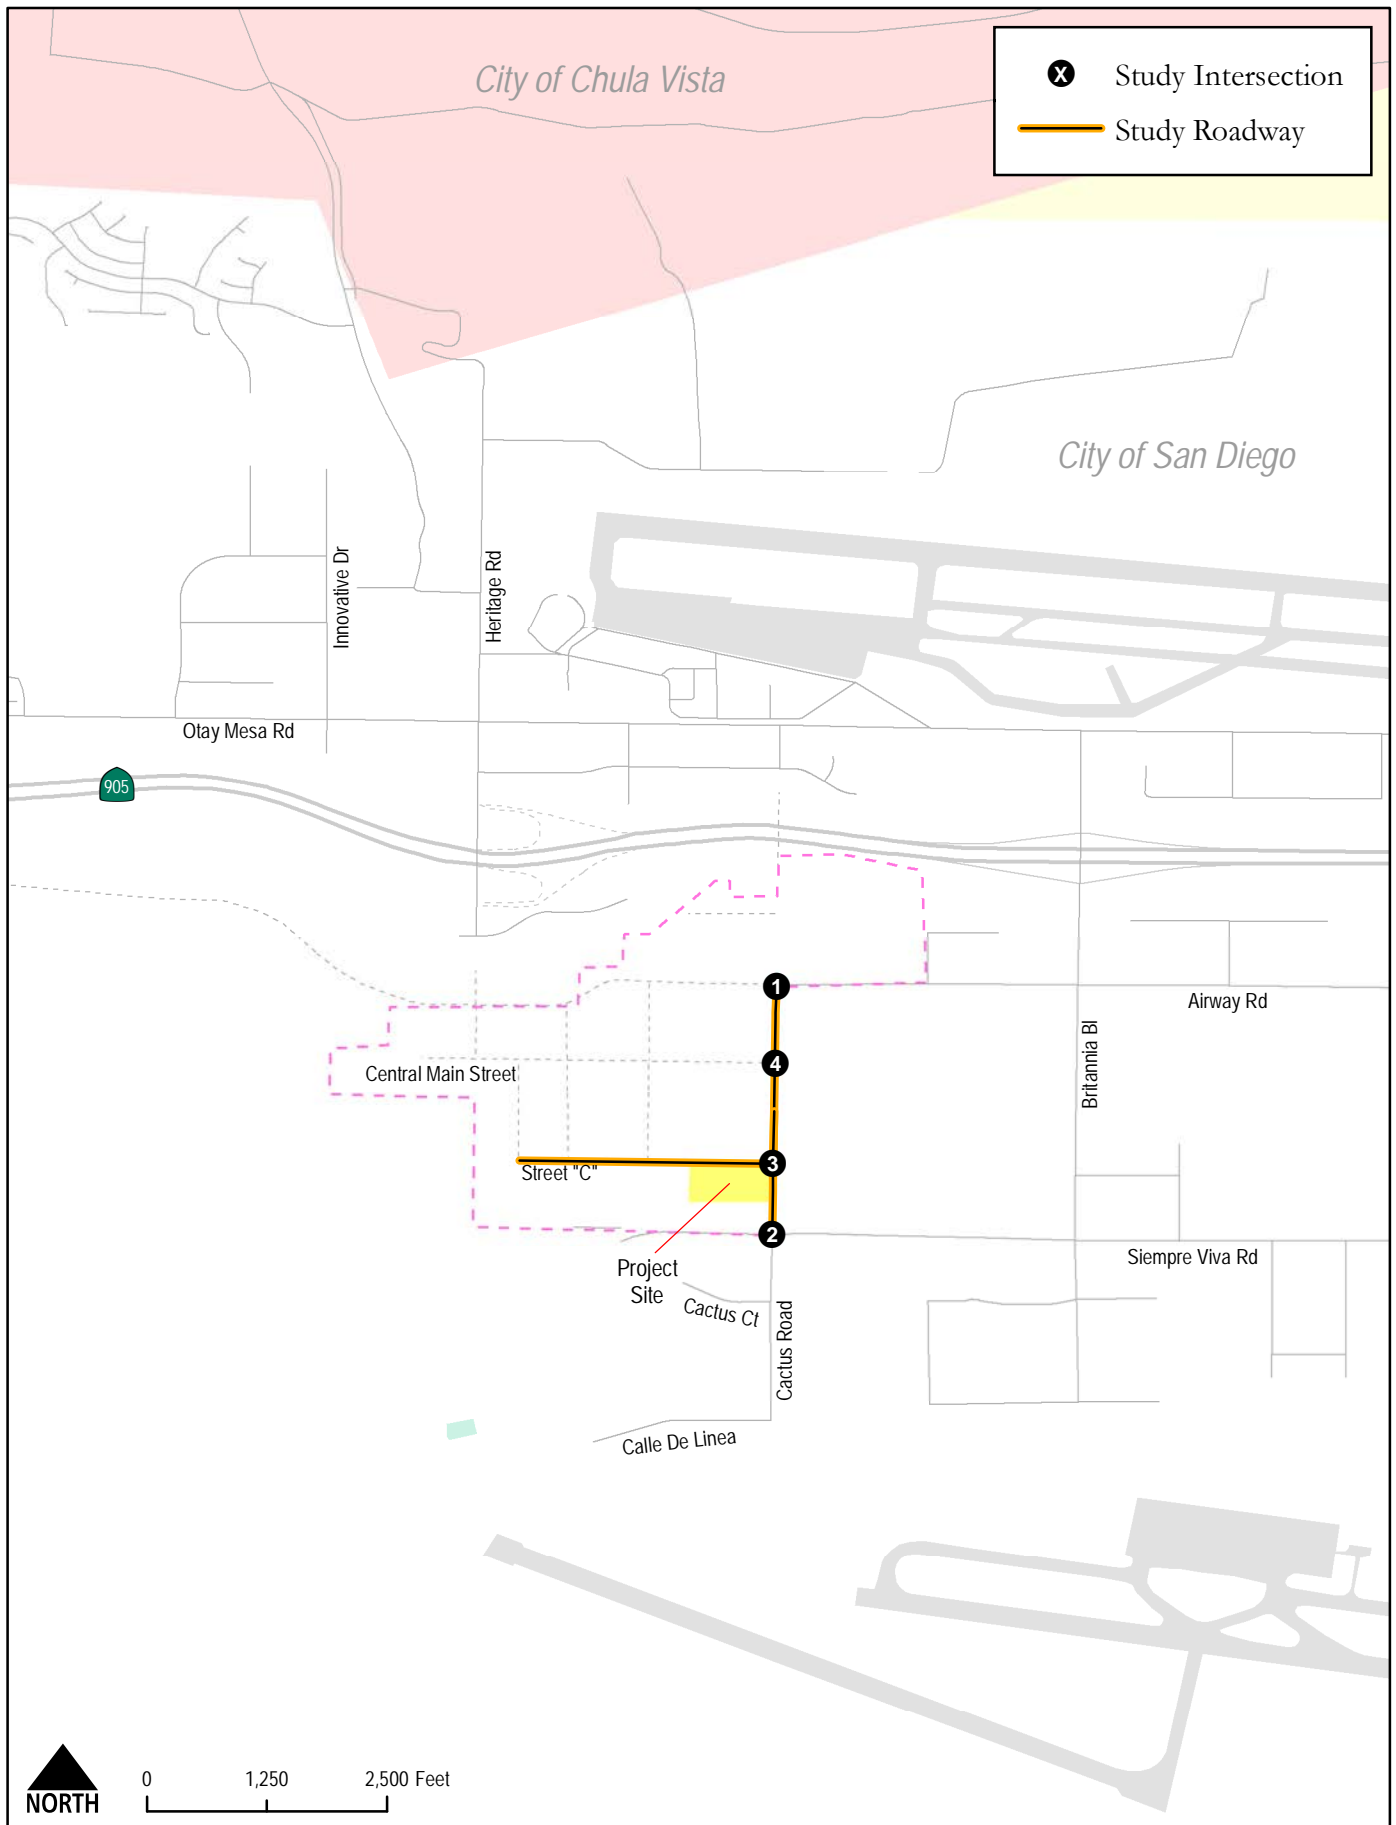

Existing Conditions

This section describes the study area, traffic volume information and LOS analysis results under existing conditions.

Roadway Network

Cactus Road, between Airway Road and Siempre Viva Road is currently a 2-lane undivided roadway with a posted speed limit of 35 MPH. Sidewalks and curb and gutter are generally not present except on the east side of the roadway for approximately 1,200 feet along ADESA Auto Auction frontage. Bike lanes are not present on either side of the roadway. Cactus Road is classified as a 4-lane Major Arterial between Airway Road and Siempre Viva Road in the Otay Mesa Community Plan.


Existing Roadway and Intersection Volumes

Traffic Volumes

Due to construction on the roadway segment of Airway Road between Cactus Road and Britannia Boulevard, traffic counts were not collected on the roadway segment of Cactus Road between Airway Road and Siempre Viva because traffic volumes and patterns are greatly affected by the construction. Therefore, historic counts from the years 2015 and 2019 for the near-by segment of Cactus Road north of Airway Road were utilized to develop a growth factor. As a result, an approximate growth of 100% (from 228 ADT to 478 ADT) was calculated in the area. This growth factor was applied to the 2015 historic counts on the roadway segment of Cactus Road between Airway Road and Siempre Viva Road in order to derive 2019-2020 daily traffic volumes of 4,352 ADT.

Traffic volumes at the intersection of Cactus Road and Siempre Viva Road were also estimated by applying the same approach/methodology described above. Historic counts from the years 2015 and 2019 for the near-by intersection of Cactus Road and Airway Road were utilized to develop a growth factor for both AM and PM peak hours. As a result, an approximate growth of 1% (from 202 total intersection peak hour volumes to 204 total intersection peak hour volumes) was calculated at the intersection during the AM peak hour and an approximate 6% growth (from 292 total intersection peak hour volumes to 310 total intersection peak hour volumes) was calculated at the intersection during the PM peak hour. These growth factors were applied to the 2015 historic counts at the intersection of Cactus Road and Siempre Viva Road in order to derive 2019-2020 volumes.

Figure 6 displays estimated existing daily traffic volumes within the study area roadway segment. See **Attachment 1** for traffic count calculations.

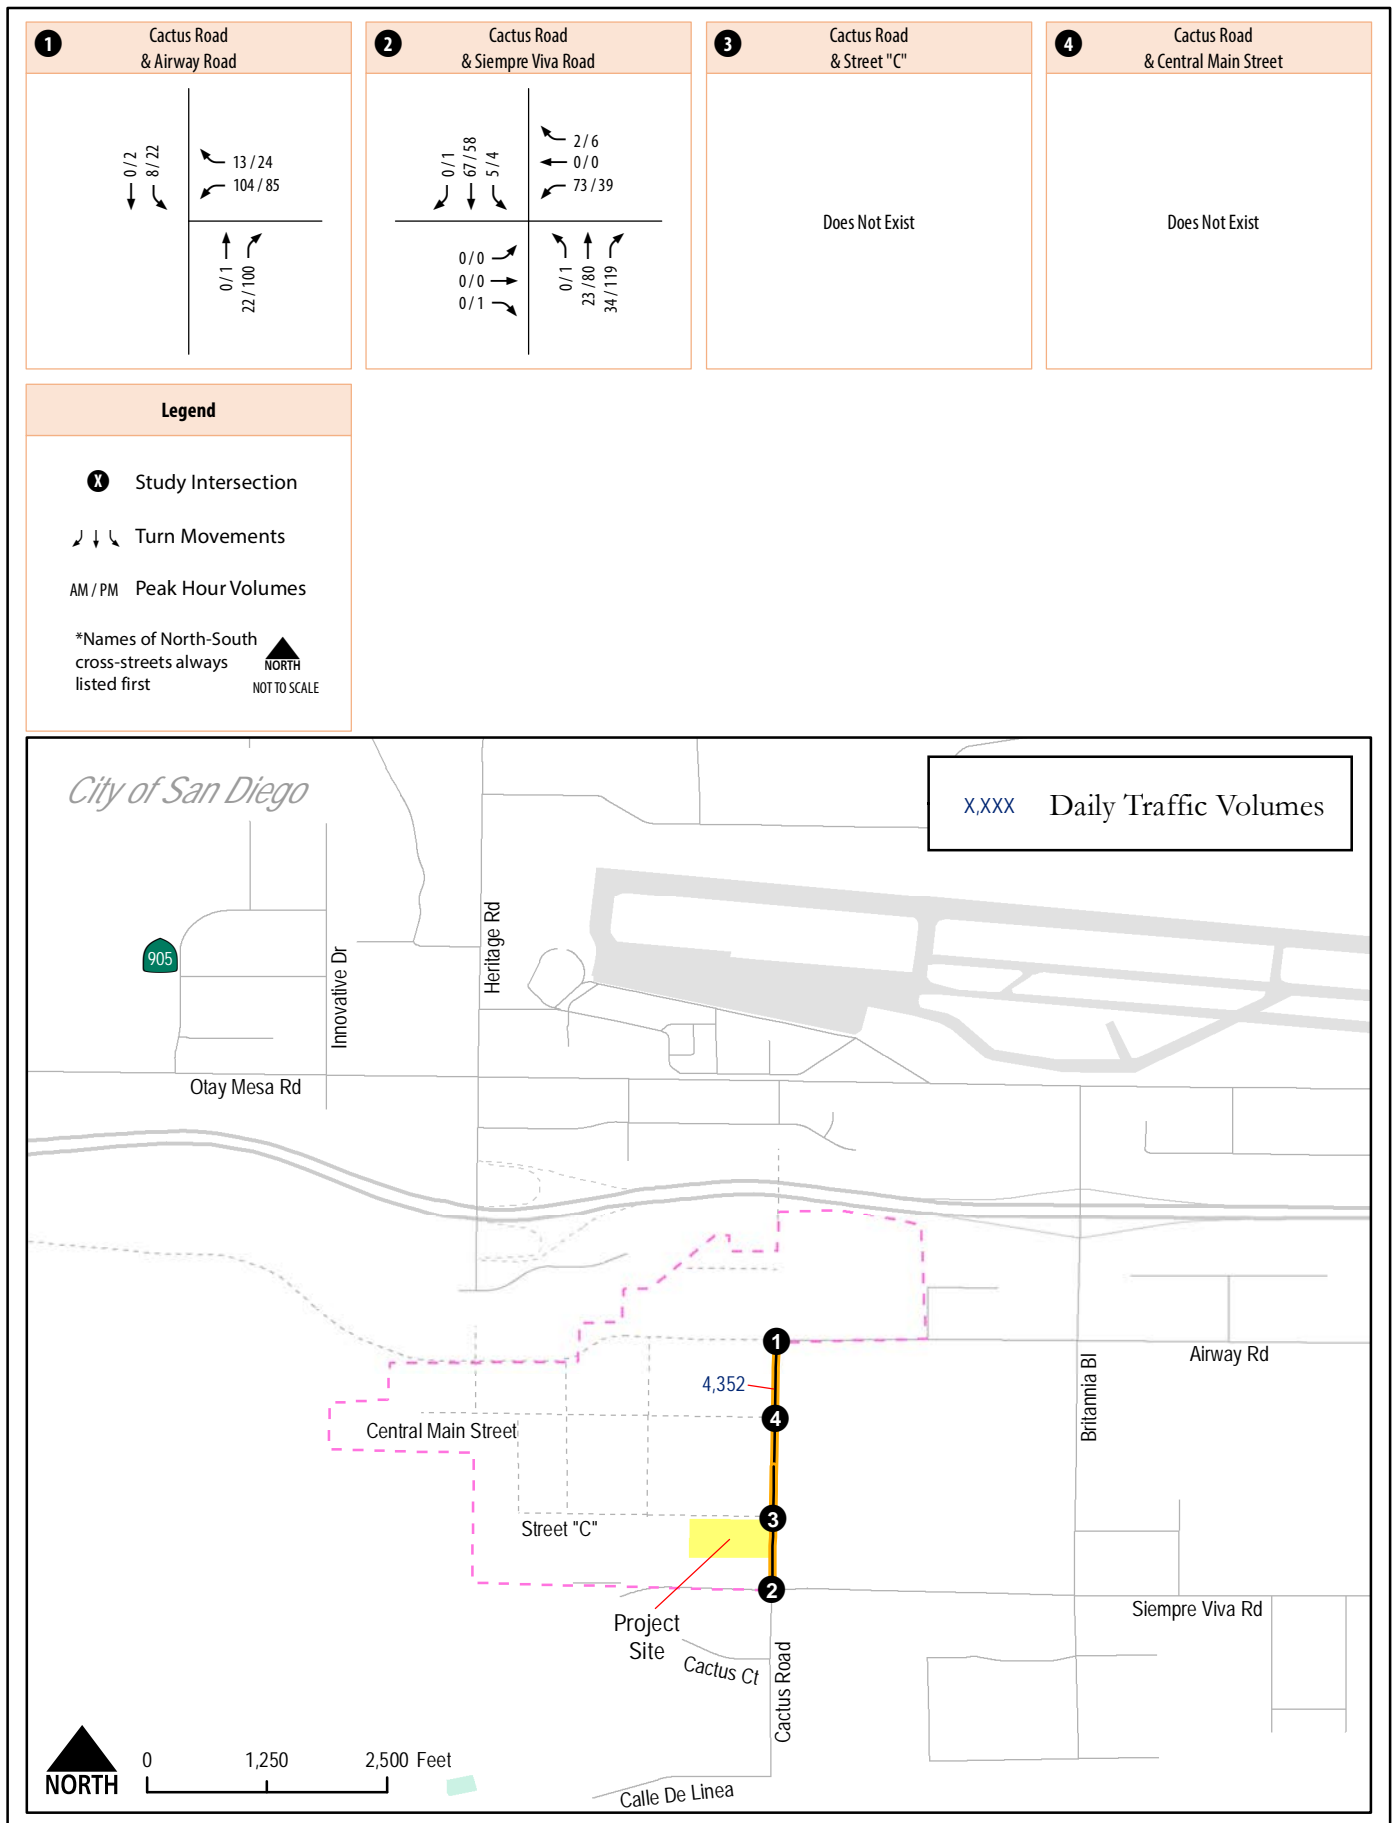

Traffic Operations Under Existing Conditions

This section documents the traffic operations under Existing conditions within the study area. Roadway segment and intersection operations are discussed separately below. The roadway and intersection analyses were performed in accordance with the requirements of the City of San Diego Traffic Impact Study Manual, July 1998, the City of San Diego Significance Determination Thresholds, January 2016, and the enhanced California Environmental Quality Act (CEQA) project review process. Detailed information on roadway segment and intersection analysis methodologies, standards, and thresholds are found in **Attachment 2**.

Roadway Segment

Table 2 displays the daily roadway level of service for Cactus Road, along the project frontage under Existing conditions.

Table 2 Roadway Segment Level of Service Results – Existing Conditions

Roadway	Segment	Functional Classification	LOS Threshold (LOS E)	ADT	V/C	LOS
Cactus Road	Between Airway Road and Siempre Viva Road	2-Lane Collector w/ Commercial Fronting	8,000	4,352*	0.544	C

Source: Chen Ryan Associates, January 2021

Notes:

V/C = Volume to Capacity Ratio.

*Estimated ADT.

As shown in Table 2, Cactus Road operates at LOS C within the study area.

Intersection

Table 3 displays the intersection level of service for the project study area intersections under Existing Conditions. LOS calculation worksheets for Existing Conditions are provided in **Attachment 3**.

Table 3 Intersection Level of Service Results – Existing Conditions

#	Intersection	Control Type	AM Peak Hour		PM Peak Hour	
			Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS
1	Cactus Road / Airway Road	SSSC	9.3	A	10.0	B
2	Cactus Road / Siempre Viva Road	AWSC	7.9	A	8.4	A
3	Cactus Road / Street "C"			DNE		
4	Cactus Road / Central Main Street			DNE		

Source: Chen Ryan Associates, January 2021

Notes:

SSSC = Side-Street Stop Control.

AWSC = All Way Stop Control.

DNE = Does Not Exist.

For SSSC, the delay shown is the worst delay experienced by any of the approaches.

For AWSC, the delay shown is the average delay experienced by all of the approaches.

As shown in Table 3, both intersections operate at LOS B or better during both the AM and PM peak hour under Existing Conditions.

Existing With Project Conditions

This section describes the study area, traffic volume information and LOS analysis results under existing with project conditions.

Roadway Network

The following facilities are assumed to be constructed by the Project as part of project frontage. These improvements shall be completed and operational prior to first occupancy:

Roadway Segment

- Cactus Road, between Street "C" and southern property boundary – This segment serves as the project frontage and will be improved to a 3-Lane Major Arterial (1 northbound lane and 2 southbound lanes with a raised median). This roadway is classified as a 4-Lane Major Arterial in the currently adopted Otay Mesa Community Plan, which is consistent with the project description in the Otay Mesa Public Facilities Financing Plan (PFFP).
- Street "C", between Village Way and Cactus Road – This segment serves as the project frontage and will be improved to a full width 2-Lane Collector. The roadway is shown as a residential collector in the Central Village Specific Plan.

Intersection


- Cactus Road / Street "C" – Construction of an all-way stop controlled (AWSC) T-intersection with an additional southbound through lane at the project frontage to match the roadway cross section mentioned above. However, the Otay Mesa Central Village Specific Plan Transportation Facilities Trigger Analysis (TFTA) identifies this intersection as signalized. Therefore, appropriate design measures, such as the layout of the traffic signal foundation will be taken into consideration when constructing this intersection. Full buildout of the Central Village Specific Plan will trigger the need for signalization of this intersection and the applicant shall contribute 25% towards the future signalization of this intersection because the project fronts one of four corners at this intersection. Per mitigation measure TRF-1 in the Central Village Specific Plan FEIR, March 17, 2017 (SCH No. 2004651076)

Traffic Volumes

Existing With Project traffic volumes were derived by combining the existing traffic volumes (Figure 5) and the project trip assignment volumes displayed in (Figure 4). Existing With Project daily roadway and intersection volumes are displayed in **Figure 7**.

Traffic Operations Under Existing With Project Conditions

This section documents the traffic operations under Existing With Project conditions within the study area. Roadway segment and intersection operations are discussed separately below.

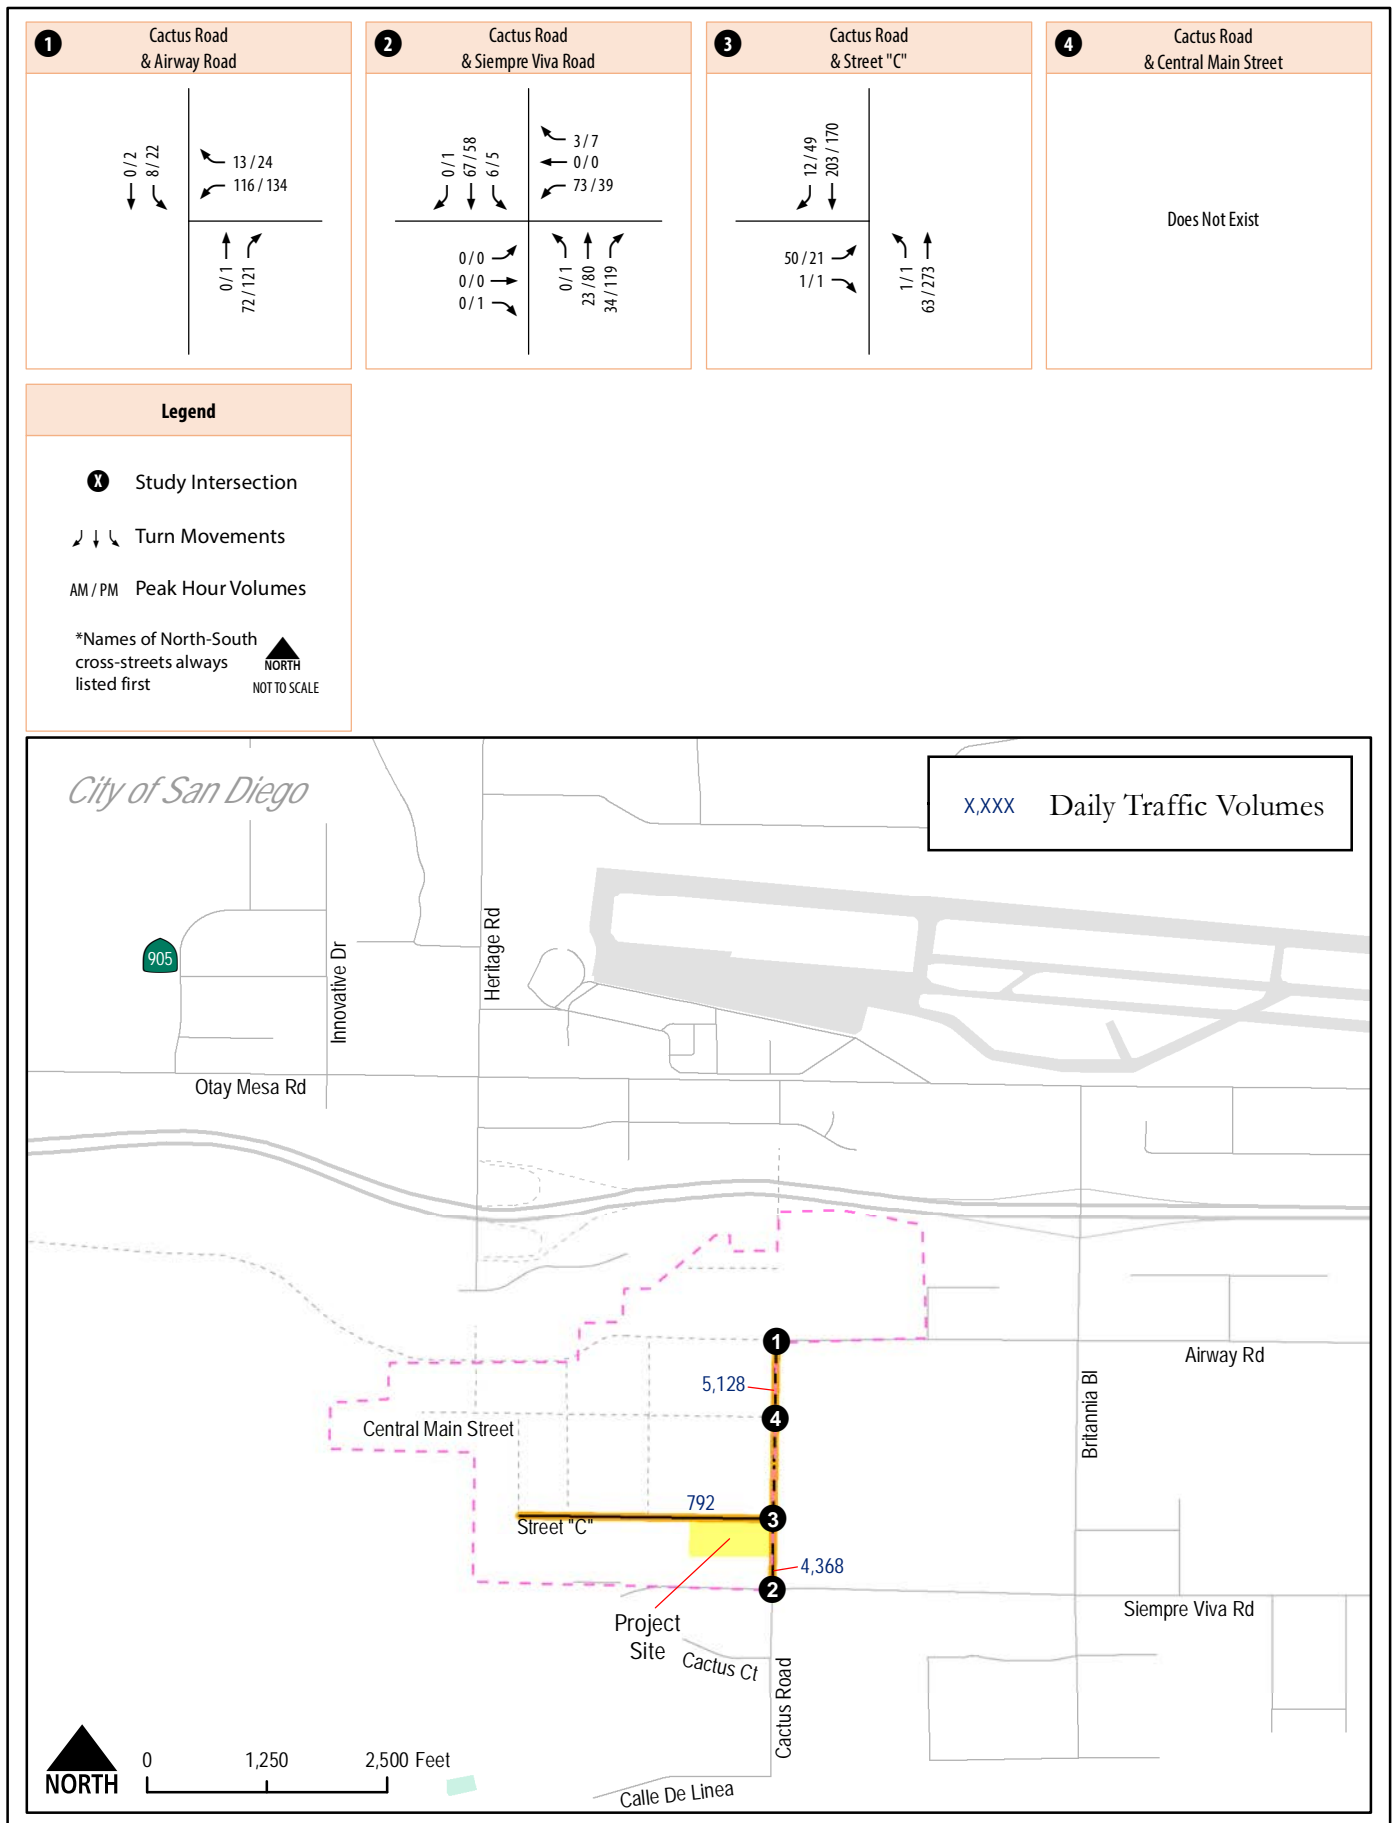

Roadway Segment

Table 4 displays the daily roadway level of service for Cactus Road under Existing With Project conditions.

Table 4 Roadway Segment Level of Service Results – Existing With Project Conditions

Roadway	Segment	Functional Classification	LOS Threshold (LOS E)	ADT	V/C	LOS	V/C w/o Project	LOS w/o Project	ΔV/C	SI?
Cactus Road	Between Airway and Street "C"	2-Lane Collector w/ Commercial Fronting	8,000	5,128	0.641	D	0.544	B	0.097	N
Cactus Road	Between Street "C" and southern property boundary	3-Ln w / RM (1NB, 2 SB)	30,000 ¹	4,368	0.145	A	0.544	B	-0.399	N
Cactus Road	Between southern property boundary and Siempre Viva Road	2-Lane Collector w/ Commercial Fronting	8,000	4,368	0.546	C	0.544	B	0.002	N
Street "C"	Between Village Way and Cactus Road	2-Lane Collector (multi-family) ²	8,000	792	0.100	A	0.544	N/A	N/A	N

Source: Chen Ryan Associates, January 2021

Notes:

V/C = Volume to Capacity Ratio.

SI? = Significant Impact?

¹ Based on the capacity of a 4-Lane Major Arterial, reduced to exclude a lane. ($3/4 * 40,000 = 30,000$).

² Consistent with roadway classification included in the Otay Mesa Lumina TIS, February 20, 2019.

As shown in Table 4, all of the roadway segments operate at LOS D or better within the study area, with the implementation of the proposed project.

Based upon the significance impact criteria outlined in the City of San Diego Traffic Impact Study Manual, July 1998, the analyzed roadway segments **would not** be significantly impacted under Existing With Project conditions and mitigation measures **would not** be required.

Intersection

Table 5 displays the intersection level of service for the intersections under Existing With Project conditions. LOS calculation worksheets for Existing With Project conditions are provided in **Attachment 4**.

Table 5 Intersection Level of Service Results – Existing With Project Conditions

#	Intersection	Control Type	AM Peak Hour		PM Peak Hour		Delay w/o Project (sec) AM/PM	LOS w/o Project AM/PM	Change in Delay (sec) AM/PM	SI?
			Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS				
1	Cactus Road / Airway Road	SSSC	9.6	A	10.6	B	9.3 / 10.0	A / B	0.3 / 0.3	N
2	Cactus Road / Siempre Viva Road	AWSC	7.9	A	8.4	A	7.9 / 8.4	A / A	0.0 / 0.0	N
3	Cactus Road / Street "C"	AWSC	8.2	A	9.4	A	DNE	DNE	-	N
4	Cactus Road / Central Main Street			DNE			N/A	N/A	N/A	N/A

Source: Chen Ryan Associates, January 2021

Notes:

SSSC = Side-Street Stop Control.

AWSC = All Way Stop Control.

DNE = Does Not Exist.

N/A = Not Applicable.

For SSSC, the delay shown is the worst delay experienced by any of the approaches.

For AWSC, the delay shown is the average delay experienced by all of the approaches.

As shown in Table 5, the study area intersections are projected to operate at LOS B or better during both the AM and PM peak hour, with the implementation of the proposed project.

Based upon the significance impact criteria outlined in the City of San Diego Traffic Impact Study Manual, July 1998, the analyzed intersection **would not** be significantly impacted under Existing With Project conditions and mitigation measures **would not** be required.

Near-Term Year (Opening Day) 2027 Conditions

This section describes the study area, traffic volume information and LOS analysis results under Near-Term Year (Opening Day) 2027 Conditions.

Description of Cumulative Projects

The same cumulative projects (Year 2027) utilized in the Otay Mesa Lumina Transportation Impact Study, February 2019, were included for the analysis of Otay Mesa Lumina II, with the addition of the following six (6) projects:

15. Otay Mesa Lumina – This project proposes to develop 1,655 medium high-density multi-family units, 213 low density multi-family units, 62, 500 square feet of commercial uses, 6.3 acres of school uses, and 6.6 acres of parks by the year 2027 (Full Development). This project is anticipated to generate a total of 15,581 daily trips, including 1,214 peak hour trips (390-in / 824-out) during the AM and 1,532 peak hour trips (944-in / 588-out) during the PM.

16. Otay Mesa Lumina III – This project proposes to develop 25 multi-family residential dwelling units by year 2027. This project is anticipated to generate 150 daily trips, including 12 peak hour trips (2-in / 10-out) during the AM and 14 peak hour trips (10-in / 4-out) during the PM.
17. Otay Mesa Floreo – This project proposes to develop 900 multi-family residential dwelling units, 10,000 square feet of community commercial uses, and 3.5 acres of park by year 2023. This project is anticipated to generate 6,275 daily trips, including 460 peak hour trips (103-in / 357-out) during the AM and 570 peak hour trips (382-in / 188-out) during the PM.
18. Southwest Village Specific Plan - This project proposes to develop 5,130 attached and detached residences, 175,000 square feet of community commercial and retail uses, 20 acres of parks, and a 7.5-acre school site. This project is anticipated to generate 45,050 daily trips, including 3,188 peak hour trips (904-in / 2,284-out) during the AM and 4,270 peak hour trips (2,631-in / 1,639-out) during the PM.
19. Plaza La Media South – This project proposes to develop 437,220 square feet of warehouse. This project is anticipated to generate 2,186 daily trips, including 328 peak hour trips (230-in / 98-out) during the AM and 350 peak hour trips (139-in / 211-out) during the PM.
20. Warehouse and Distribution Center – This project proposed to develop 235,480 square feet of warehouse and 12,000 square feet of office. This project is anticipated to generate 1,297 daily trips, including 195 peak hour trips (140-in / 55-out) during the AM and 206 peak hour trips (77-in / 129-out) during the PM.

Table 6 displays trip generation for the cumulative projects described above. Trip distribution and trip assignment for the cumulative projects was obtained from the Otay Mesa Lumina Transportation Impact Study, February 2019. Project information for the additional six projects listed above is included in **Attachment 5**.

Table 6 Cumulative Projects Trip Generation

Cumulative Project	Land Use	Daily Trips	AM Peak Hour (In / Out)	PM Peak Hour (In / Out)
1. 7-Eleven – Otay Mesa Road / Ocean View Hills Parkway (PTS#540084)	Convenience Store	1,800	144 (72-in / 72-out)	144 (72-in / 72-out)
2. Azul Playa Del Sol/Luna (California Terraces PA 6)	Residential	4,440	356 (71-in / 285-out)	400 (280-in / 120-out)
3. Candlelight (PTS#40329)	Residential	2,850	228 (46-in / 182-out)	257 (180-in / 77-out)
4. Southview (PTS#370044)	Residential	1,662	133 (27-in / 106-out)	299 (105-in / 194-out)
5. Southview East (PTS#371807)	Residential	816	65 (13-in / 52-out)	220 (51-in / 169-out)
6. Southwind (PTS#412529)	Residential	800	64 (13-in / 51-out)	80 (56-in / 24-out)

Table 6 Cumulative Projects Trip Generation

Cumulative Project	Land Use	Daily Trips	AM Peak Hour (In / Out)	PM Peak Hour (In / Out)
7. Handler Site ¹ (PTS#659064)	Motel	1,701	136 (54-in / 82-out)	153 (61-in / 92-out)
	Restaurant (sit down high turnover)	3,120	250 (125-in / 125-out)	250 (150-in / 100-out)
	Fast food (with drive-through)	4,200	168 (101-in / 67-out)	336 (168-in / 168-out)
8. Arco #5770	Gas Station	60	4 (2-in / 2-out)	4 (2-in / 2-out)
9. Marijuana Production Facility (PTS#585510)	Marijuana Facility	346	69 (62-in / 7-out)	69 (14-in / 55-out)
10. California Terraces PA 61 (PTS#605191)	Mixed-use Residential/Commercial	4,716	252 (101-in / 151-out)	486 (271-in / 215-out)
11. Cross Border Facility (Full Buildout) (PTS#473500)	Cross Border Facility	46,700	2,313 (1,505-in / 808-out)	2,547 (1,115-in / 1,431-out)
12. Metro Airpark Site ² (PTS#559378)	Airport / Retail	24,760	2,695 (2,116-in / 579-out)	2,780 (710-in / 2,070-out)
13. Plaza La Media (Full Buildout) (PTS#334235)	Commercial/Retail	8,660	310 (183-in / 127-out)	812 (407-in / 405-out)
14. Sunroad Otay Mesa (Phase 1 and Phase 2) (PTS#538140)	Warehouse	4,225	633 (444-in / 189-out)	676 (270-in / 406-out)
15. Otay Mesa Lumina ³ (PTS#555609)	Mixed-Use Residential/Commercial	15,581	1,214 (390-in / 824-out)	1,532 (944-in / 588-out)
16. Otay Mesa Lumina III ⁴ (PTS#651806)	Residential	200	16 (3-in / 13-out)	20 (14-in / 6-out)
17. Otay Mesa Floreo ⁵ (PTS#620164)	Mixed-Use Residential/Commercial	6,275	460 (103-in / 357-out)	570 (382-in / 188-out)
18. Southwest Village ⁶ (PTS#614791)	Mixed-Use Residential/Commercial	45,050	3,188 (904-in / 2,284-out)	4,270 (2,631-in / 1,639-out)
19. Plaza La Media South ⁷ (PTS#632813)	Warehouse	2,186	328 (230-in / 98-out)	350 (139-in / 211-out)

Table 6 Cumulative Projects Trip Generation

Cumulative Project	Land Use	Daily Trips	AM Peak Hour (In / Out)	PM Peak Hour (In / Out)
20. Warehouse Distribution Center ⁸ (PTS#665589)	Warehouse / Office	1,297	195 (140-in / 55-out)	206 (77-in / 129-out)
	Cumulative Total	180,898	13,251 (6,705-in / 6,546-out)	16,521 (8,162-in / 8,421-out)

Source: Chen Ryan Associates, January 2021

Notes:

¹ Handler Site is currently under review for CPA/RZ to 560 DU plus 7,500 sq.ft. of commercial under PTS#673818.² Metro Airpark Site is currently under review for different SCR under PTS#664354.³ Trip Generation obtained from Otay Mesa Lumina TIS prepared by Chen Ryan Associates, Inc. February 20, 2019.⁴ Trip Generation obtained from Otay Mesa Lumina III Draft TIS prepared by Chen Ryan Associates, Inc. February 20, 2020 (under review).⁵ Trip Generation obtained from the Draft Otay Mesa Floreo TIS prepared by Chen Ryan Associates, Inc. June 6, 2019. (under review).⁶ Trip Generation obtained from City of San Diego Land Development Code – Trip Generation Manual, May 2003.⁷ Trip Generation obtained from Plaza La Media South Traffic Sensitivity Analysis (TSA) prepared by Kimley-Horn Associates, Inc. February 2020. (under review)⁸ Trip Generation obtained from City of San Diego DSD staff.

Near-Term Year (Opening Day) 2027 Roadway and Intersection Volumes

Roadway Network

The roadway network was assumed to be identical to the Existing conditions network as shown in Figure 5.

Traffic Volumes

Figure 8 displays cumulative projects location and trip assignment. Near-Term Year (Opening Day) 2027 traffic volumes were derived by combining the existing traffic volumes (displayed in Figure 6), cumulative project trip assignment displayed in **Figure 9**, and the proposed project trip assignment volumes (displayed in Figure 4). **Figure 10** displays Near-Term Year (Opening Day) 2027 traffic volumes.

Traffic Operations Under Near-Term Year (Opening Day) 2027 Conditions

This section documents the traffic operations under Near-Term Year (Opening Day) 2027 conditions within the study area. Roadway segment and intersection operations are discussed separately below.

Roadway Segment

Table 7 displays the daily roadway level of service for Cactus Road and Street “C”, along the project frontage under Near-Term Year (Opening Day) 2027 conditions.

Table 7 Roadway Segment Level of Service Results – Near-Term Year (Opening Day) 2027 Conditions

Roadway	Segment	Functional Classification	LOS Threshold (LOS E)	ADT	V/C	LOS
Cactus Road	Between Airway Road and Central Main Street	2-Lane Collector w/ Commercial Fronting	8,000	10,907	1.363	F
Cactus Road	Between Central Main Street and Street "C"	2-Lane Collector w/ Commercial Fronting	8,000	7,659	0.957	E
Cactus Road	Between Street "C" and southern property boundary	2-Lane Collector w/ Commercial Fronting	8,000	4,794	0.600	C
Cactus Road	Between southern property boundary and Siempre Viva Road	2-Lane Collector w/ Commercial Fronting	8,000	4,794	0.600	C
Street "C"	Between Village Way and Cactus Road	2-Lane Collector (multi-family) ¹	8,000	3,100	0.388	B


Source: Chen Ryan Associates, January 2021


Notes:


Bold letter indicates substandard LOS.

V/C = Volume to Capacity Ratio.

¹ Consistent with roadway classification included in the Otay Mesa Lumina TIS, February 20, 2019.

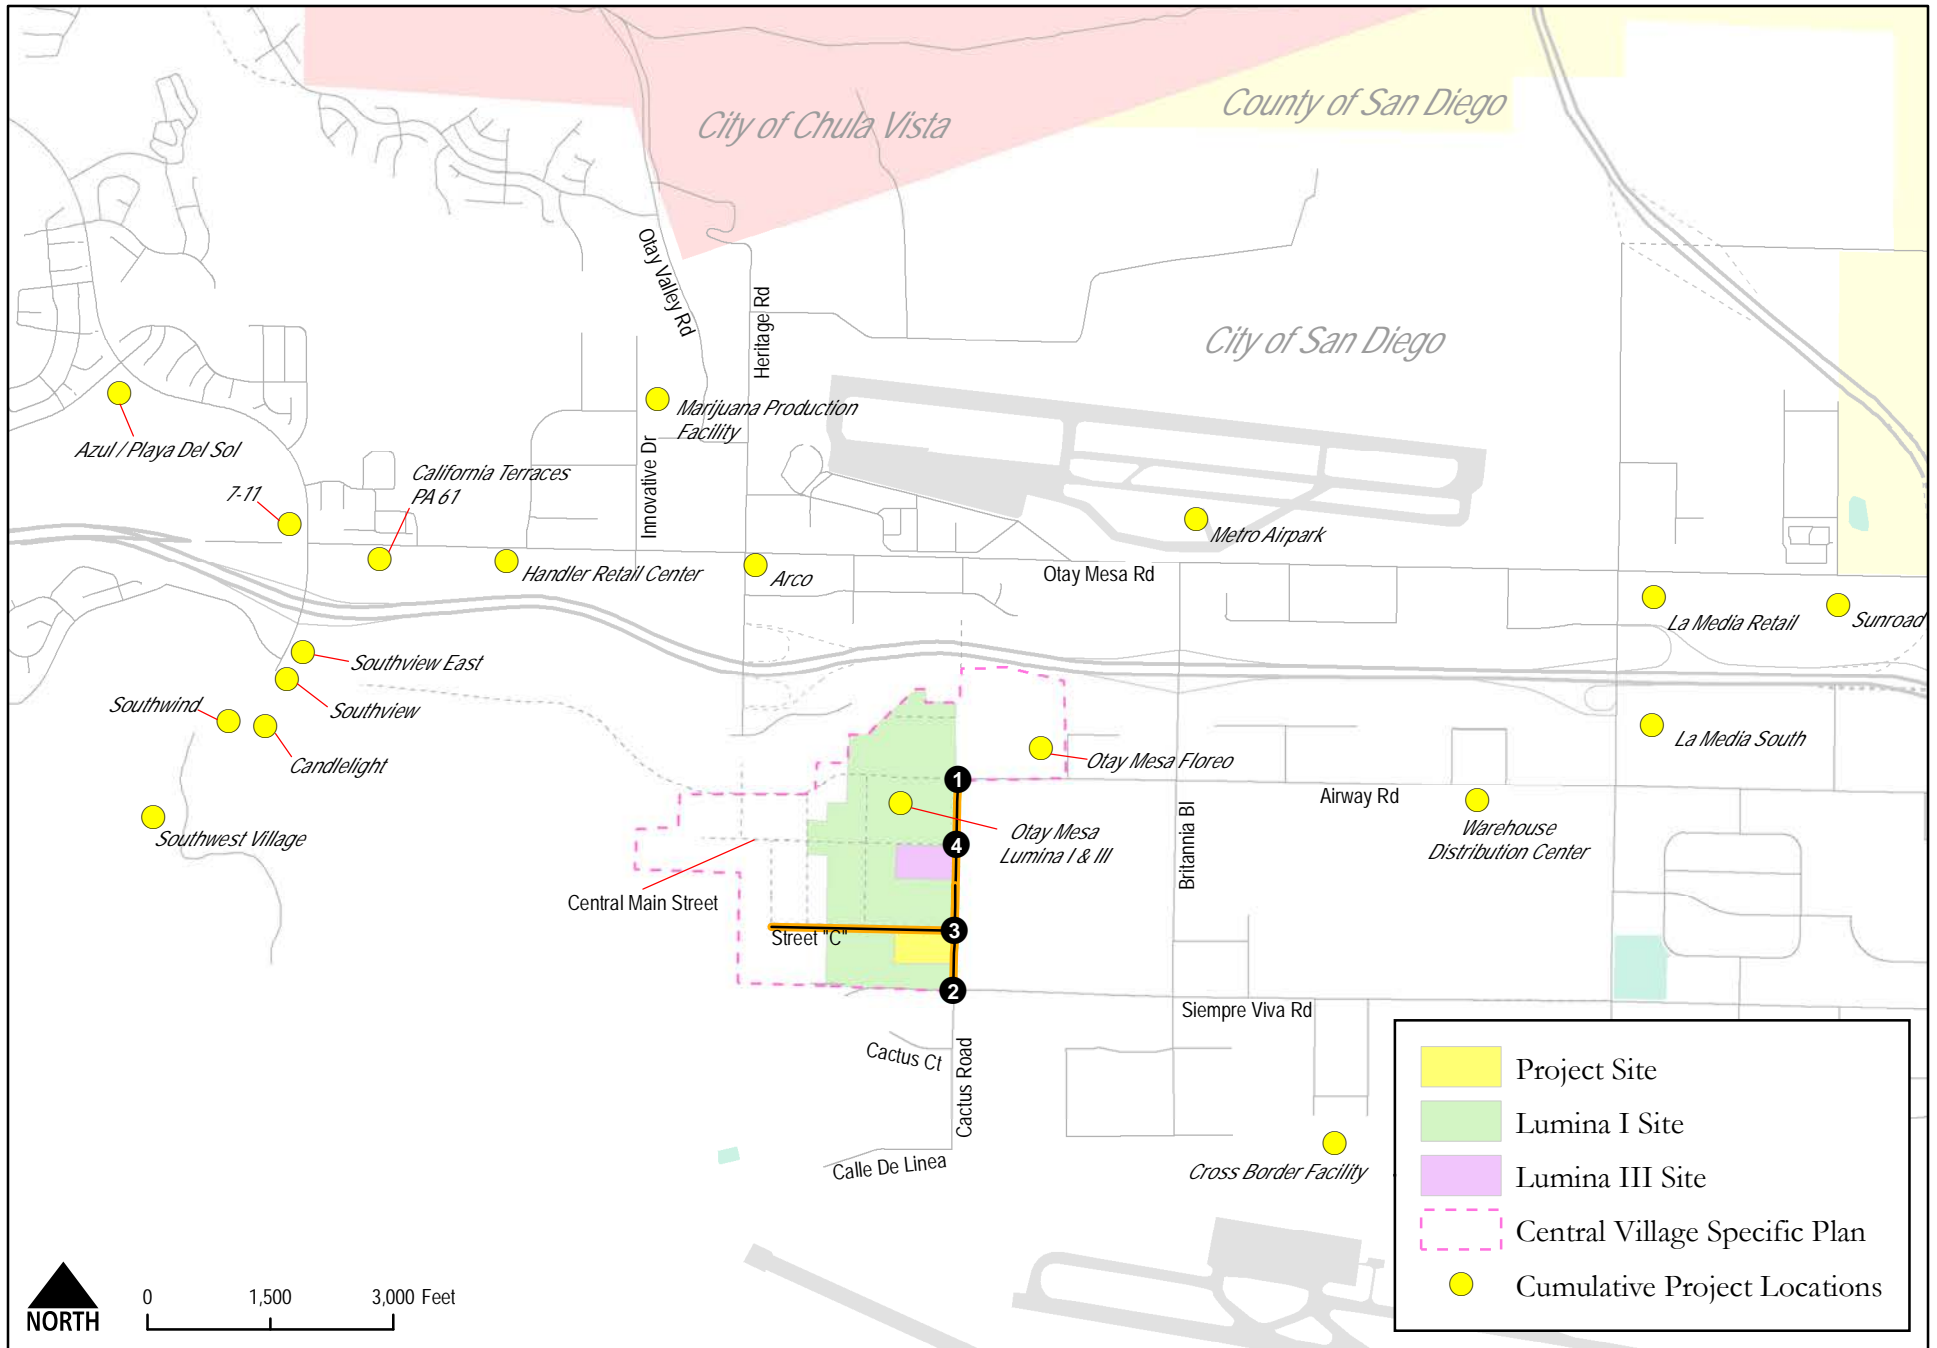

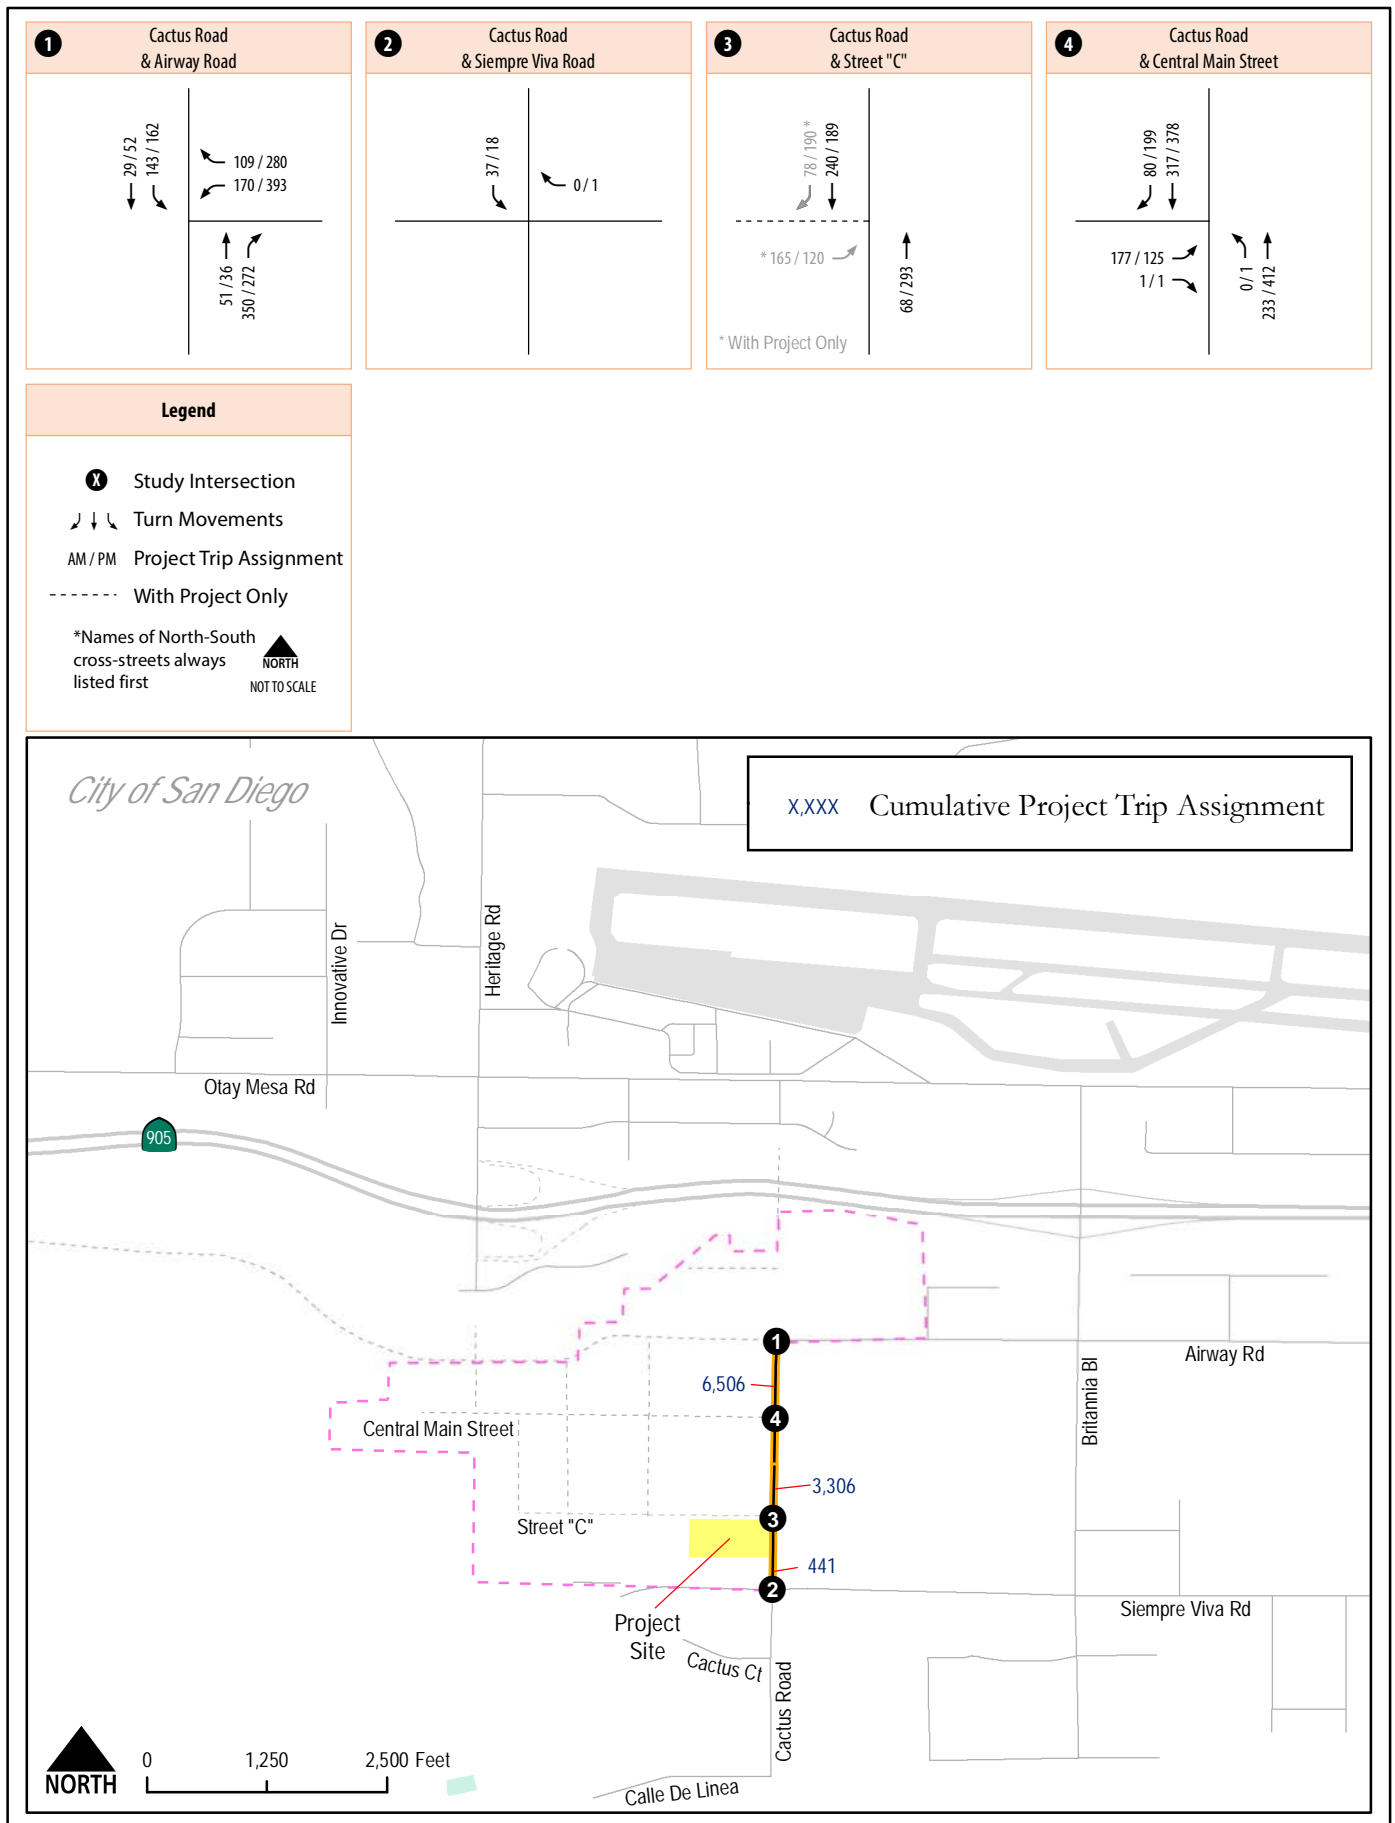

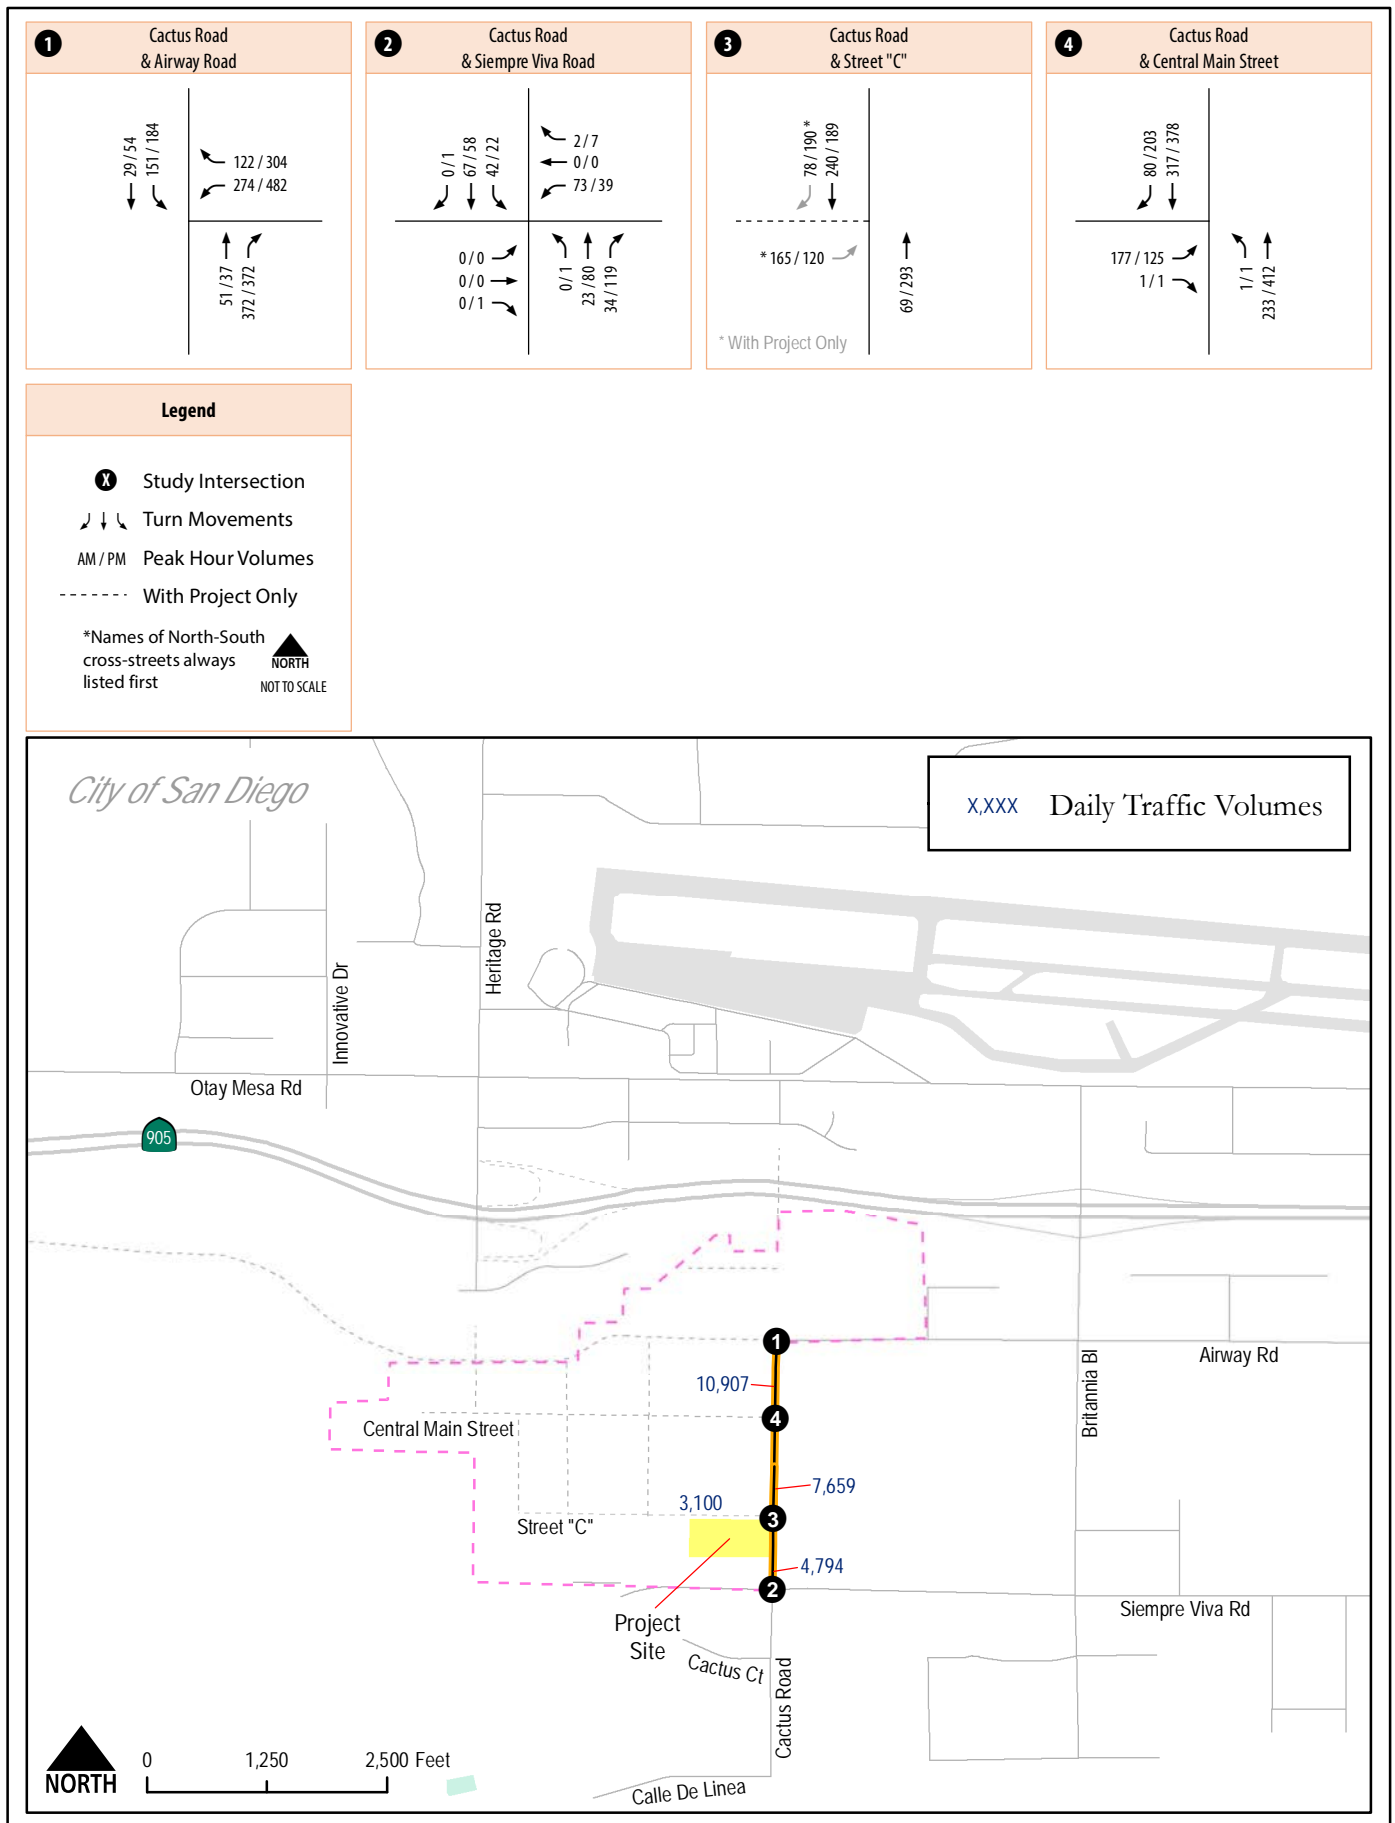

As shown in Table 7, all of the project study area roadway segments are projected to operate at LOS C, except for the following:

- Cactus Road, between Airway Road and Central Main Street – LOS F; and
- Cactus Road, between Central Main Street and Street “C” – LOS E.

Intersection

Table 8 displays the intersection level of service for the project study area intersections under Near-Term Year (Opening Day) 2027 Conditions. LOS calculation worksheets for Near-Term Year (Opening Day) 2027 conditions are provided in **Attachment 6**.

Table 8 Intersection Level of Service Results – Near-Term Year (Opening Day) 2027 Conditions

#	Intersection	Control Type	AM Peak Hour		PM Peak Hour	
			Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS
1	Cactus Road / Airway Road	SSSC	222.2	F	N/A ¹	F
2	Cactus Road / Siempre Viva Road	AWSC	8.1	A	8.4	A
3	Cactus Road / Street “C”	AWSC	9.3	A	11.0	B
4	Cactus Road / Central Main Street	AWSC	11.0	B	15.7	C

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

SSSC = Side-Street Stop Control.

AWSC = All Way Stop Control.

For SSSC, the delay shown is the worst delay experienced by any of the approaches.

For AWSC, the delay shown is the average delay experienced by all of the approaches.

¹ Exceeds maximum reasonable calculable delay of 600 seconds per Synchro 10.0 traffic analysis software.

As shown in Table 8, the study area intersections are projected to operate at LOS B or better during both the AM and PM peak hour, except for the following:

1. Cactus Road / Airway Road – LOS F during both the AM and PM peak hours.

Near-Term Year (Opening Day) 2027 With Project Conditions

This section describes the study area, traffic volume information and LOS analysis results under Near-Term Year (Opening Day) 2027 With Project conditions.

Roadway Network


The roadway network was assumed to be identical to Existing conditions.

Traffic Volumes

Near-Term Year (Opening Day) 2027 With Project traffic volumes were derived by combining the Near-Term Year (Opening Day) 2027 traffic volumes (Figure 10) and the project trip assignment volumes displayed in (Figure 4). Near-Term Year (Opening Day) 2027 With Project daily roadway and intersection volumes are displayed in **Figure 11**.

Traffic Operations Under Near-Term Year (Opening Day) 2027 With Project Conditions

This section documents the traffic operations under Near-Term Year (Opening Day) 2027 With Project conditions within the study area. Roadway segment and intersection operations are discussed separately below.

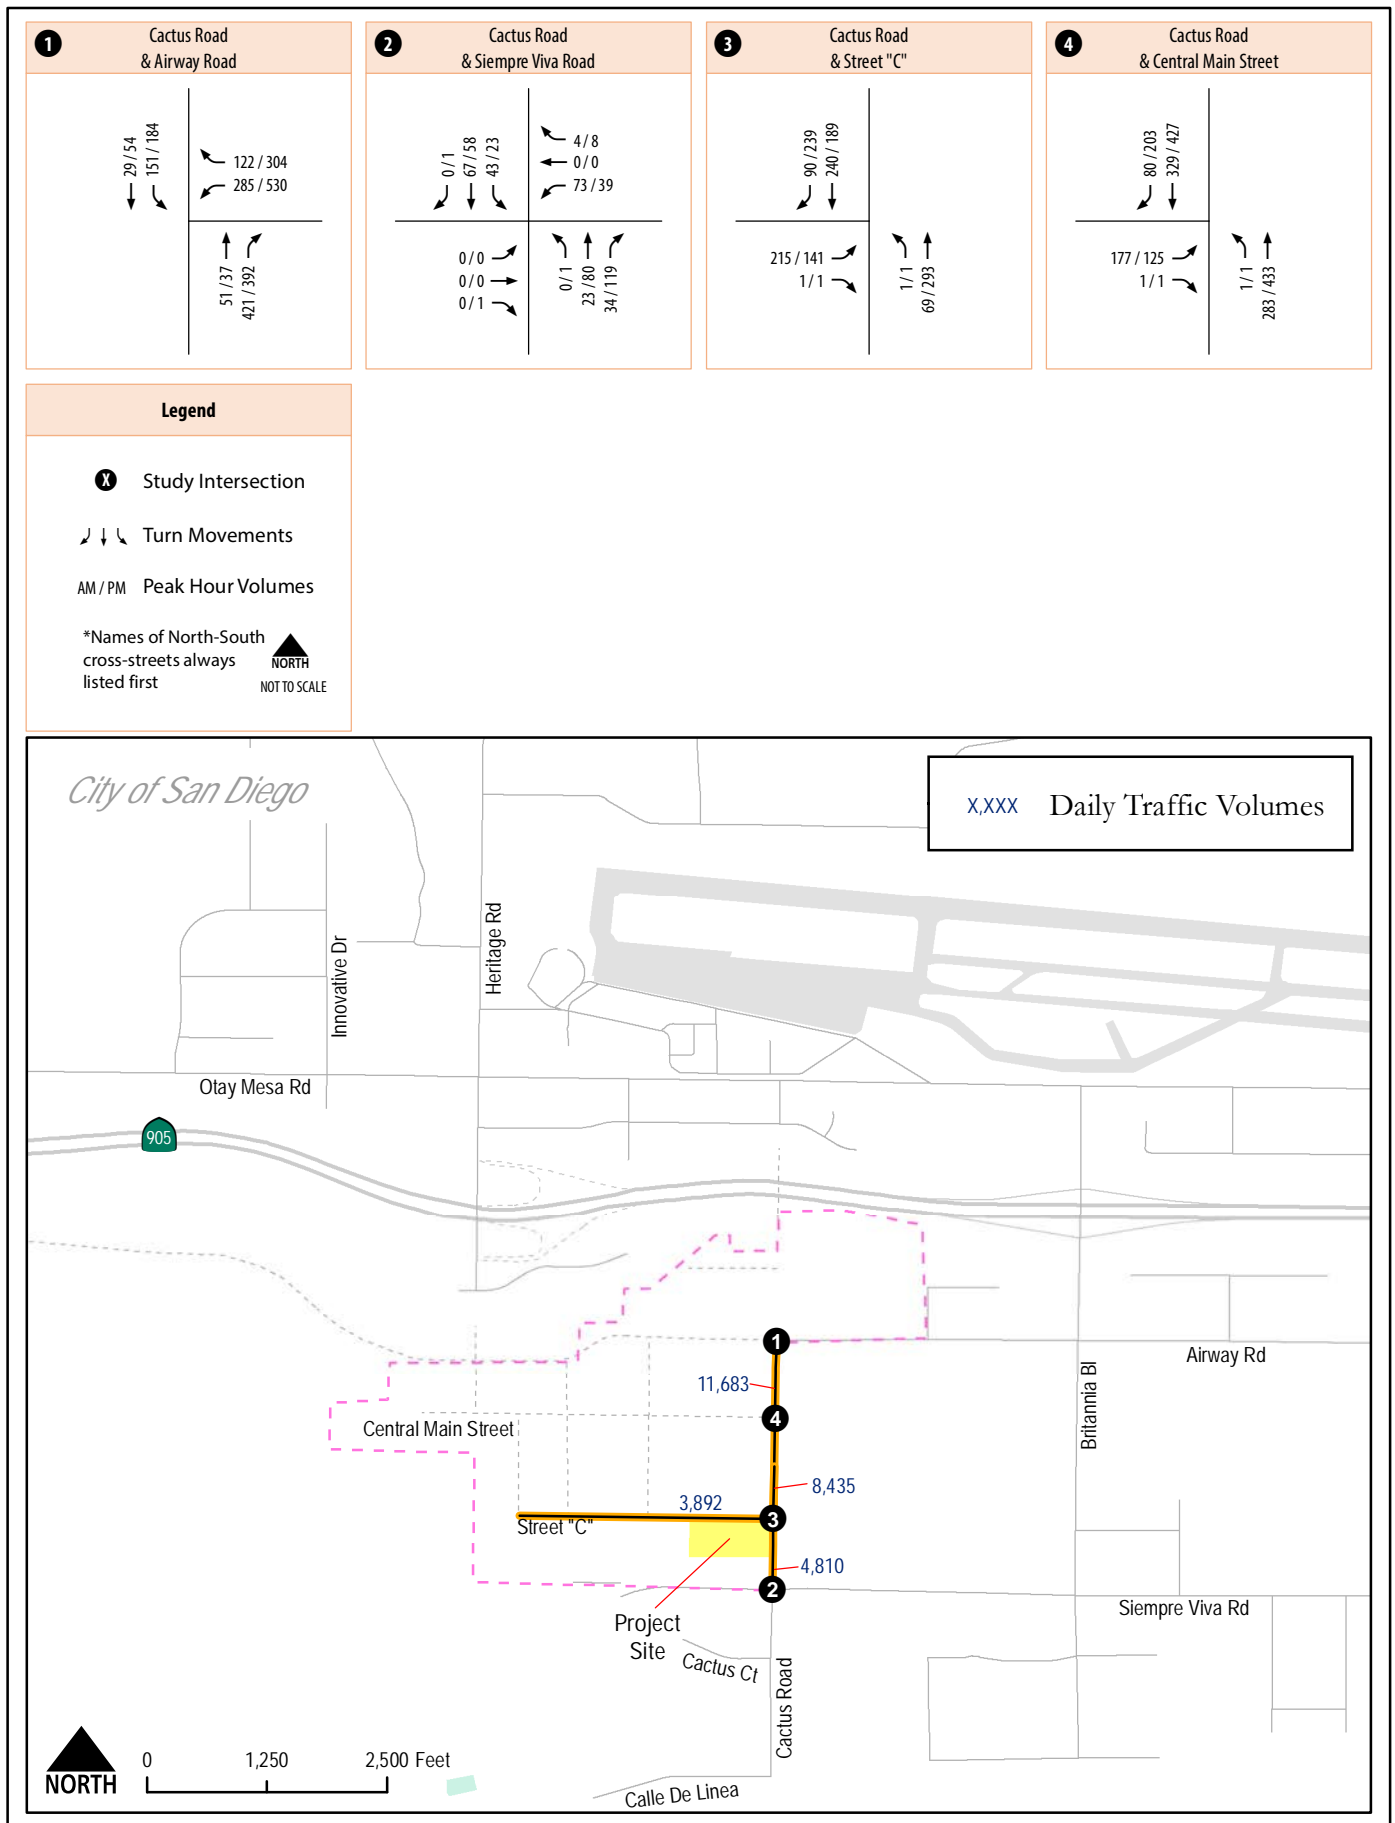

Roadway Segment

Table 9 displays the daily roadway level of service for Cactus Road, along the project frontage under Near-Term Year (Opening Day) 2027 With Project conditions.

Table 9 Roadway Segment Level of Service Results – Near-Term Year (Opening Day) 2027 With Project Conditions

Roadway	Segment	Functional Classification	LOS Threshold (LOS E)	ADT	V/C	LOS	V/C w/o Project	LOS w/o Project	ΔV/C	SI?
Cactus Road	Between Airway Road and Central Main Street	2-Lane Collector w/ Commercial Fronting	8,000	11,683	1.454	F	1.363	F	0.091	Y
Cactus Road	Between Central Main Street and Street "C"	2-Lane Collector w/ Commercial Fronting	8,000	8,435	1.054	F	0.957	E	0.097	Y
Cactus Road	Between Street "C" and southern property boundary	3-Ln w / RM (1NB, 2 SB)	30,000 ¹	4,810	0.160	A	0.600	C	-0.440	N
Cactus Road	Between southern property boundary and Siempre Viva Road	2-Lane Collector w/ Commercial Fronting	8,000	4,810	0.601	C	0.600	C	0.001	N
Street "C"	Between Village Way and Cactus Road	2-Lane Collector (multi-family) ²	8,000	3,892	0.487	B	0.388	B	0.100	N

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

V/C = Volume to Capacity Ratio.

SI? = Significant Impact?

¹ Based on the capacity of a 4-Lane Major Arterial, reduced to exclude a lane. (3/4*40,000 = 30,000).

² Consistent with roadway classification included in the Otay Mesa Lumina TIS, February 20, 2019.

As shown in Table 9, all of the project study area roadway segments are projected to operate at LOS C or better with the exception of the following:

- Cactus Road, between Airway Road and Central Main Street – LOS F; and
- Cactus Road, between Central Main Street and Street "C" – LOS F.

Based upon the significance impact criteria outlined in the City of San Diego Traffic Impact Study Manual, July 1998, these roadway segments would be significantly impacted under Near-Term Year (Opening Day) 2027 With Project conditions and mitigation measures would be required.

Intersection

Table 10 displays the intersection level of service for the intersections under Near-Term Year (Opening Day) 2027 With Project conditions. LOS calculation worksheets for Near-Term Year (Opening Day) 2027 With Project conditions are provided in **Attachment 7**.

Table 10 Intersection Level of Service Results – Near-Term Year (Opening Day) 2027 With Project Conditions

#	Intersection	Control Type	AM Peak Hour		PM Peak Hour		Delay w/o Project (sec) AM/PM	LOS w/o Project AM/PM	Change in Delay (sec) AM/PM	SI?
			Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS				
1	Cactus Road / Airway Road	SSSC	279.6	F	N/A ¹	F	222.2 / N/A ¹	F / F	57.4 / N/A	Y
2	Cactus Road / Siempre Viva Road	AWSC	8.1	A	8.4	A	8.1 / 8.4	A / A	0.0 / 0.0	N
3	Cactus Road / Street "C"	AWSC	9.9	A	11.5	B	9.3 / 11.0	A / B	0.6 / 0.5	N
4	Cactus Road / Central Main Street	AWSC	11.9	B	17.2	C	11.0 / 15.7	B / B	0.9 / 1.5	N

Source: Chen Ryan Associates, January 2021

Notes:

SSSC = Side-Street Stop Control.

AWSC = All Way Stop Control.

DNE = Does not exist.

SI? = Significant Impact?

For SSSC, the delay shown is the worst delay experienced by any of the approaches.

For AWSC, the delay shown is the average delay experienced by all of the approaches.

¹ Exceeds maximum reasonable calculable delay of 600 seconds per Synchro 10.0 traffic analysis software.

As shown in Table 10, the study area intersections are projected to operate at LOS C or better during both the AM and PM peak hour, with the implementation of the proposed project, except for the following intersection:

1. Cactus Road / Airway Road – LOS F during both the AM and PM peak hours.

Based upon the significance impact criteria outlined in the City of San Diego Traffic Impact Study Manual, July 1998, the analyzed intersection would be significantly impacted under Near-Term Year (Opening Day) 2027 With Project conditions and mitigation measures would be required.

Buildout of Community Plan Conditions

This section describes the study area, traffic volume information and LOS analysis results under Buildout of Community Plan Conditions.

Roadway Network

The same roadway network assumptions utilized in the Otay Mesa Lumina Transportation Impact Study, February 2019, were employed for the analysis of Otay Mesa Lumina II.

Buildout of Community Plan Conditions Roadway and Intersection Volumes

Traffic Volumes

The same roadway and intersection volumes utilized in the Otay Mesa Lumina Transportation Impact Study, February 2019, were employed for the analysis of Otay Mesa Lumina II.

Traffic Operations Under Buildout of Community Plan Conditions

This section documents the traffic operations under Buildout of Community Plan Conditions within the study area. Roadway segment and intersection operations are discussed separately below.

Roadway Segment

Table 11 displays the daily roadway level of service for Cactus Road and Street "C", along the project frontage under Buildout of Community Plan Conditions.

Table 11 Roadway Segment Level of Service Results – Buildout of Community Plan Conditions

Roadway	Segment	Functional Classification	LOS Threshold (LOS E)	ADT	V/C	LOS
Cactus Road	Between Airway Road and Central Main Street	4-Lane Major Arterial	40,000	38,279	0.955	E
Cactus Road	Between Central Main Street and Street "C"	4-Lane Major Arterial	40,000	38,279	0.955	E
Cactus Road	Between Street "C" and southern property boundary	4-Lane Major Arterial	40,000	38,849	0.955	E
Cactus Road	Between southern property boundary and Siempre Viva Road	4-Lane Major Arterial	40,000	38,849	0.972	E
Street "C"	Between Village Way and Cactus Road	2-Lane Collector (multi-family) ¹	8,000	3,100	0.388	B

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

V/C = Volume to Capacity Ratio.

¹ Consistent with roadway classification included in the Otay Mesa Lumina TIS, February 20, 2019.

As shown in Table 11, except for Street "C", all of the project study area roadway segments are projected to operate at LOS E:

- Cactus Road, between Airway Road and Central Main Street – LOS E;
- Cactus Road, between Central Main Street and Street "C" – LOS E;
- Cactus Road, between Street "C" and southern property boundary – LOS E; and
- Cactus Road, between southern property boundary and Siempre Viva Road – LOS E.

Intersection

Table 12 displays the intersection level of service for the project study area intersections under Buildout of Community Plan Conditions. LOS calculation worksheets for Buildout of Community Plan Conditions are provided in **Attachment 8**.

Table 12 Intersection Level of Service Results – Buildout of Community Plan Conditions

#	Intersection	Control Type	AM Peak Hour		PM Peak Hour	
			Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS
1	Cactus Road / Airway Road	Signal	357.5	F	396.3	F
2	Cactus Road / Siempre Viva Road	Signal	423.0	F	508.5	F
3	Cactus Road / Street "C"	AWSC	578.8	F	N/A ¹	F
4	Cactus Road / Central Main Street	AWSC	N/A ¹	F	N/A ¹	F

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

AWSC = All Way Stop Control.

For AWSC, the delay shown is the average delay experienced by all of the approaches.

¹ Exceeds maximum reasonable calculable delay of 600 seconds per Synchro 10.0 traffic analysis software.

As shown in Table 12, all of the study area intersections are projected to operate at LOS F during both the AM and PM peak hour.

Buildout of Community Plan With Project Conditions

This section describes the study area, traffic volume information and LOS analysis results under Buildout of Community Plan With Project conditions.

Roadway Network

The roadway network was assumed to be identical to Buildout of Community Plan Conditions.

Traffic Volumes

The same roadway and intersection volumes utilized in the Otay Mesa Lumina Transportation Impact Study, February 2019, were employed for the analysis of Otay Mesa Lumina II.

Trip Distribution

The same project trip distribution (Buildout of Community Plan) utilized in the Otay Mesa Lumina Transportation Impact Study, February 2019, was employed for the analysis of Otay Mesa Lumina II.

Traffic Operations Under Buildout of Community Plan With Project Conditions

This section documents the traffic operations under Buildout of Community Plan With Project Conditions within the study area. Roadway segment and intersection operations are discussed separately below.

Roadway Segments

Table 13 displays the daily roadway level of service for Cactus Road, along the project frontage under Buildout of Community Plan With Project conditions.

Table 13 Roadway Segment Level of Service Results – Buildout of Community Plan With Project Conditions

Roadway	Segment	Functional Classification	LOS Threshold (LOS E)	ADT	V/C	LOS	V/C w/o Project	LOS w/o Project	$\Delta V/C$	SI?
Cactus Road	Between Airway Road and Central Main Street	4-Lane Major Arterial	40,000	38,960	0.974	E	0.955	E	0.019	N
Cactus Road	Between Central Main Street and Street "C"	4-Lane Major Arterial	40,000	38,960	0.974	E	0.955	E	0.019	N
Cactus Road	Between Street "C" and southern property boundary	4-Lane Major Arterial	40,000	38,960	0.974	E	0.955	E	0.019	N
Cactus Road	Between southern property boundary and Siempre Viva Road	4-Lane Major Arterial	40,000	38,960	0.974	E	0.972	E	0.002	N
Street "C"	Between Village Way and Cactus Road	2-Lane Collector (multi-family) ¹	8,000	3,892	0.487	B	0.388	B	0.100	N

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

V/C = Volume to Capacity Ratio.

SI? = Significant Impact?

¹ Consistent with roadway classification included in the Otay Mesa Lumina TIS, February 20, 2019.

As shown in Table 13, all of the project study area roadway segments are projected to operate at LOS E except for the following:

- Street "C", between Village Way and Cactus Road – LOS B.

Based upon the significance impact criteria outlined in the City of San Diego Traffic Impact Study Manual, July 1998, these roadway segments would not be significantly impacted under Buildout of Community Plan With Project conditions and mitigation measures would not be required.

Intersections

Table 14 displays the intersection level of service for the intersections under Buildout of Community Plan With Project Conditions. LOS calculation worksheets for Buildout of Community Plan With Project conditions are provided in **Attachment 9**.

Table 14 Intersection Level of Service Results – Buildout of Community Plan With Project Conditions

#	Intersection	Control Type	AM Peak Hour		PM Peak Hour		Delay w/o Project (sec) AM/PM	LOS w/o Project AM/PM	Change in Delay (sec) AM/PM	SI?
			Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS				
1	Cactus Road / Airway Road	Signal	358.3	F	402.4	F	357.5 / 396.3	F / F	0.8 / 6.1	Y
2	Cactus Road / Siempre Viva Road	Signal	424.5	F	511.3	F	423.0 / 508.5	F / F	1.5 / 2.8	Y
3	Cactus Road / Street "C"	AWSC	N/A ¹	F	N/A ¹	F	578.8 / N/A ¹	F / F	31.8 / 11.0	Y
4	Cactus Road / Central Main Street	AWSC	N/A ¹	F	N/A ¹	F	N/A ¹ / N/A ¹	F / F	19.8 / 11.3	Y

Source: Chen Ryan Associates, January 2021

Notes:

SSSC = Side-Street Stop Control.

AWSC = All Way Stop Control.

DNE = Does not exist.

SI? = Significant Impact?

For SSSC, the delay shown is the worst delay experienced by any of the approaches.

For AWSC, the delay shown is the average delay experienced by all of the approaches.

¹ Exceeds maximum reasonable calculable delay of 600 seconds per Synchro 10.0 traffic analysis software.

As shown in Table 14, all of the study area intersections are projected to operate at LOS F during both the AM and PM peak hour, with the implementation of the proposed project.

Based upon the significance impact criteria outlined in the City of San Diego Traffic Impact Study Manual, July 1998, the analyzed intersections would be significantly impacted under Buildout of Community Plan With Project conditions and mitigation measures would be required.

Recommended Mitigation Measures

This section identifies required mitigation measures for roadway and intersection facilities that are associated with the Otay Mesa Lumina II Project.

Near-Term Year (Opening Day) 2027

As discussed earlier in this memorandum, significant impacts were identified under Near-Term Year (Opening Day) 2027 with Project conditions. **Table 15** displays level of service analysis results both before and after implementation of the recommended mitigation measures at the impacted roadway segments under Near-Term Year (Opening Day) 2027 with Project conditions.

Roadway Segments

- Cactus Road, between Airway Road and Central Main Street – The Project shall widen this roadway segment from a 2-Lane Collector to a 3-Lane Major Arterial (1 northbound lane and 2 southbound lanes with a raised median). This roadway is classified as a 4-Lane Major Arterial in the currently adopted Otay Mesa Community Plan, which is consistent with the project description in the Otay Mesa Public Facilities Financing Plan (PFFP). As shown in Table 15, this segment would operate at LOS B with the recommended mitigation measure under Near-Term Year (Opening Day) 2027 with Project conditions.
- Cactus Road, between Central Main Street and Street “C” – The Project shall widen this roadway segment from a 2-Lane Collector to a 3-Lane Major Arterial (1 northbound lane and 2 southbound lanes with a raised median). This roadway is classified as a 4-Lane Major Arterial in the currently adopted Otay Mesa Community Plan, which is consistent with the project description in the Otay Mesa Public Facilities Financing Plan (PFFP). As shown in Table 15, this segment would operate at LOS A with the recommended mitigation measure under Near-Term Year (Opening Day) 2027 with Project conditions.

Table 15 Roadway Segment Level of Service Results – Near-Term Year (Opening Day) 2027 With Project Conditions - Mitigation Measures

Roadway	Segment	Before Mitigation Measures			After Mitigation Measures		
		ADT	Cross-Section	LOS	ADT	Cross-Section ¹	LOS
Cactus Road	Airway Road to Central Main Street	11,683	2-Ln	F	11,683	3-Ln w/RM	B
Cactus Road	Central Main Street to Street “C”	8,435	2-Ln	F	8,435	3-Ln w/RM	A

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

¹ 2 lanes SB and 1 lane NB with LOS E capacity assumed of 30,000 ADT.

As shown in Table 15, the impacted roadway segments would operate at an acceptable LOS B or better with the implementation of the recommended mitigation measures.

Intersections

Table 16 displays level of service analysis results both before and after the implementation of the recommended mitigation measures at the impacted intersection under Near-Term Year (Opening Day) 2027 with Project conditions.

1. Cactus Road / Airway Road – The Project shall signalize this intersection. This recommended mitigation measure is consistent with the OMCPU EIR analysis of traffic at OMCPU buildout. As shown in Table 16, this intersection would operate at LOS B during the AM peak hour and LOS D during the PM peak hour with the recommended mitigation measure under Near-Term Year (Opening Day) 2027 with Project conditions. LOS calculation worksheets for Near-Term Year (Opening Day) 2027 With Project conditions – Mitigation Measures are provided in **Attachment 10**.

Table 16 Intersection Level of Service Results – Near-Term Year (Opening Day) 2027 With Project Conditions – Mitigation Measures

#	Intersection	Before Mitigation Measures				After Mitigation Measures			
		AM Peak Hour		PM Peak Hour		AM Peak Hour		PM Peak Hour	
		Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS
1	Cactus Road / Airway Road	279.6	F	N/A ¹	F	11.4	B	43.0	D

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

¹ Exceeds maximum reasonable calculable delay of 600 seconds per Synchro 10.0 traffic analysis software.

As shown in Table 16, the impacted intersection would operate at an acceptable LOS B during the AM peak hour and LOS D during the PM peak hour with the recommended mitigation measure.

Buildout of Community Plan

As discussed earlier in this memorandum, significant project impacts were identified under Buildout of Community Plan Conditions.

Roadway Segments

No significant impacts.

Intersections

Table 17 displays level of service analysis results both before and after the implementation of the recommended mitigation measures at the impacted intersections under Buildout of Community Plan Conditions.

1. Cactus Road / Airway Road – In addition to signalizing the intersection at projects Opening Day in 2027, the project shall pay a 0.63% fair share contribution towards the widening of the eastbound approach (Airway Road) to accommodate dual left-turn lanes, three through lanes with a shared right-turn lane, and an exclusive right-turn lane, widen the southbound approach (Cactus Road) to accommodate dual left-turn lanes, two through lanes with a shared right-turn lane and an exclusive right-turn lane, widen the westbound approach to accommodate dual left-turn lanes, three through lanes and dual right-turn lanes, and widen the northbound approach to accommodate dual left-turn lanes, two through lanes and an exclusive right-turn lane. These recommended mitigation measures are consistent with the ultimate intersection geometrics assumption of the OMCPU EIR's analysis of traffic at OMCPU buildout. LOS calculation worksheets for Buildout of Community Plan Conditions – Mitigation Measures as well as fair share calculations are provided in **Attachment 11**.
2. Cactus Road / Siempre Viva Road – The project shall pay a 0.22% fair share contribution towards the widening of the northbound approach to accommodate an exclusive right-turn lane. These recommended mitigation measures are consistent with the ultimate intersection geometrics assumption of the OMCPU EIR's analysis of traffic at OMCPU buildout. LOS calculation worksheets for Buildout of Community Plan Conditions – Mitigation Measures as well as fair share calculations are provided in Attachment 11.
3. Cactus Road / Street "C" – Because the project fronts one of four corners of the intersection, the applicant shall contribute 25% towards the future signalization of this intersection (Per mitigation measure TRF-1 in the Central Village Specific Plan FEIR, March 17, 2017). LOS calculation worksheets for Buildout of Community Plan Conditions – Mitigation Measures are provided in Attachment 11.
4. Cactus Road / Central Main Street – The project shall pay a 1.35% fair share contribution towards the future signalization of this intersection. LOS calculation worksheets for Buildout of Community Plan Conditions – Mitigation Measures as well as fair share calculations are provided in Attachment 11.

Table 17 Intersection Level of Service Results – Buildout of Community Plan Conditions – Mitigation Measures

#	Intersection	Before Mitigation Measures				After Mitigation Measures			
		AM Peak Hour		PM Peak Hour		AM Peak Hour		PM Peak Hour	
		Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS	Avg. Delay (sec)	LOS
1	Cactus Road / Airway Road	358.3	F	402.4	F	175.0	F	250.8	F
2	Cactus Road / Siempre Viva Road	424.5	F	511.3	F	405.8	F	462.3	F
3	Cactus Road / Street “C”	N/A ¹	F	N/A ¹	F	18.0	B	17.1	B
4	Cactus Road / Central Main Street	N/A ¹	F	N/A ¹	F	38.8	D	17.8	B

Source: Chen Ryan Associates, January 2021

Notes:

Bold letter indicates substandard LOS.

¹ Exceeds maximum reasonable calculable delay of 600 seconds per Synchro 10.0 traffic analysis software.

As shown in Table 17, the impacted intersections would operate at better than pre-project conditions. Significant impacts at the following intersections are considered to be fully mitigated by improvements constructed by developers of the Central Village Specific Plan by buildout of the Specific Plan:

- Cactus Road / Street “C”
- Cactus Road / Central Main Street

The OMCPU FEIR identified the intersections of Cactus Road/ Airway Road and Cactus Road/ Siempre Viva Road as having significant and unavoidable impacts after implementation of mitigation measures.

No new significant impacts in addition to what were already disclosed in the OMCPU FEIR are identified in the analysis of this project.

Conclusion

The proposed Otay Mesa Lumina II project is anticipated to cause direct and cumulative significant impacts at the following roadway segments and intersections under two different scenarios.

Near-Term Year (Opening Day) 2027 with Project**Roadway Segments**

- Prior to issuance of the first building permit, Owner/Permittee shall assure by permit and bond the construction of Cactus Road between Airway Road and Central Main Street as a 3-lane major (2 lanes southbound, 1 lane northbound with raised median), satisfactory to the City Engineer. Improvements shall be completed and operational prior to first occupancy.
- Prior to issuance of the first building permit, Owner/Permittee shall assure by permit and bond the construction of Cactus Road between Central Main Street and Street "C" as a 3-lane major (2-lanes southbound, 1 lane northbound with raised median), satisfactory to the City Engineer. Improvements shall be completed and operational prior to first occupancy.

Intersection

1. Prior to issuance of the first building permit, Owner/Permittee shall assure by permit and bond the signalization of the intersection of Cactus Road and Airway Road, satisfactory to the City Engineer. Improvements shall be completed and operational prior to first occupancy.

With the implementation of the recommended mitigation measures the significant direct impacts are considered fully mitigated.

Buildout of Community Plan with Project**Roadway Segments**

No significant impacts.

Intersections

1. Prior to issuance of the first building permit, Owner/Permittee shall make a 0.63% fair-share contribution to the City of San Diego, towards the following improvements at the intersection of Cactus Road and Airway Road, satisfactory to the City Engineer: Widening of the eastbound approach (Airway Road) to accommodate dual left-turn lanes, three through lanes with a shared right-turn lane, and an exclusive right-turn lane, widen the southbound approach (Cactus Road) to accommodate dual left-turn lanes, two through lanes with a shared right-turn lane and an exclusive right-turn lane, widen the westbound approach to accommodate dual left-turn lanes, three through lanes and dual right-turn lanes, and widen the northbound approach to accommodate dual left-turn lanes, two through lanes and an exclusive right-turn lane. These recommended mitigation measures are consistent with the ultimate intersection geometrics assumption of the OMCPU EIR's analysis of traffic at OMCPU buildout.

2. Prior to issuance of the first building permit, Owner/Permittee shall make a 0.22% fair-share contribution to the City of San Diego, towards the following improvements at the intersection of Cactus Road and Siempre Viva Road, satisfactory to the City Engineer: Widening of the northbound approach to accommodate an exclusive right-turn lane. These recommended mitigation measures are consistent with the ultimate intersection geometrics assumption of the OMCPU EIR's analysis of traffic at OMCPU buildout.
3. Prior to issuance of the first building permit, Owner/Permittee shall make a 25% fair-share contribution to the City of San Diego, towards the following improvements at the intersection of Cactus Road and Street "C", satisfactory to the City Engineer: Traffic signal infrastructure installation. (Per TRF.1 in the Central Village Specific Plan FEIR, March 17, 2017).
4. Prior to issuance of the first building permit, Owner/Permittee shall make a 1.35% fair-share contribution to the City of San Diego, towards the following improvements at the intersection of Cactus Road and Central Main Street, satisfactory to the City Engineer: Traffic signal infrastructure installation. (Per TRF.1 in the Central Village Specific Plan FEIR, March 17, 2017).

Significant impacts at the following intersections are considered to be fully mitigated by improvements constructed by developers of the Central Village Specific Plan by buildout of the Specific Plan:

- Cactus Road / Street "C"
- Cactus Road / Central Main Street

The OMCPU FEIR identified the intersections of Cactus Road and Airway Road and Cactus Road and Siempre Viva Road as having significant and unavoidable impacts after implementation of mitigation measures. No new significant impacts in addition to those that were already disclosed in the OMCPU FEIR are identified in the analysis of this project.

Please feel free to contact me at (619) 468-2739 with any questions and/or comments.


Sincerely,



Jonathan Sanchez, TE
Lic. No. 2957



Attachment 1 – Traffic Counts & Calculations



Location: 33. Cactus Road Between Otay Mesa Road and Airway Road

Orientation: North-South

Date of Count: Thursday, October 01, 2015


Analysts: DASH


Weather: Sunny

AVC Proj. No: 15-0415

24 Hour Segment Volume						228				
Time		Hourly Volume				Time		Hourly Volume		
		NB	SB	Total				NB	SB	Total
12:00 AM - 1:00 AM		0	1	1		12:00 PM - 1:00 PM		8	9	17
1:00 AM - 2:00 AM		0	0	0		1:00 PM - 2:00 PM		4	4	8
2:00 AM - 3:00 AM		0	0	0		2:00 PM - 3:00 PM		7	5	12
3:00 AM - 4:00 AM		0	0	0		3:00 PM - 4:00 PM		9	8	17
4:00 AM - 5:00 AM		0	1	1		4:00 PM - 5:00 PM		7	7	14
5:00 AM - 6:00 AM		0	1	1		5:00 PM - 6:00 PM		8	12	20
6:00 AM - 7:00 AM		0	2	2		6:00 PM - 7:00 PM		8	6	14
7:00 AM - 8:00 AM		3	3	6		7:00 PM - 8:00 PM		2	6	8
8:00 AM - 9:00 AM		5	12	17		8:00 PM - 9:00 PM		5	2	7
9:00 AM - 10:00 AM		9	5	14		9:00 PM - 10:00 PM		4	3	7
10:00 AM - 11:00 AM		12	12	24	10:00 PM - 11:00 PM		1	1	2	
11:00 AM - 12:00 PM		16	15	31	11:00 PM - 12:00 AM		4	1	5	
Total		45	52	97	Total		67	64	131	

24-Hour	NB	Volume	112	24-Hour	SB	Volume	116
----------------	-----------	---------------	------------	----------------	-----------	---------------	------------

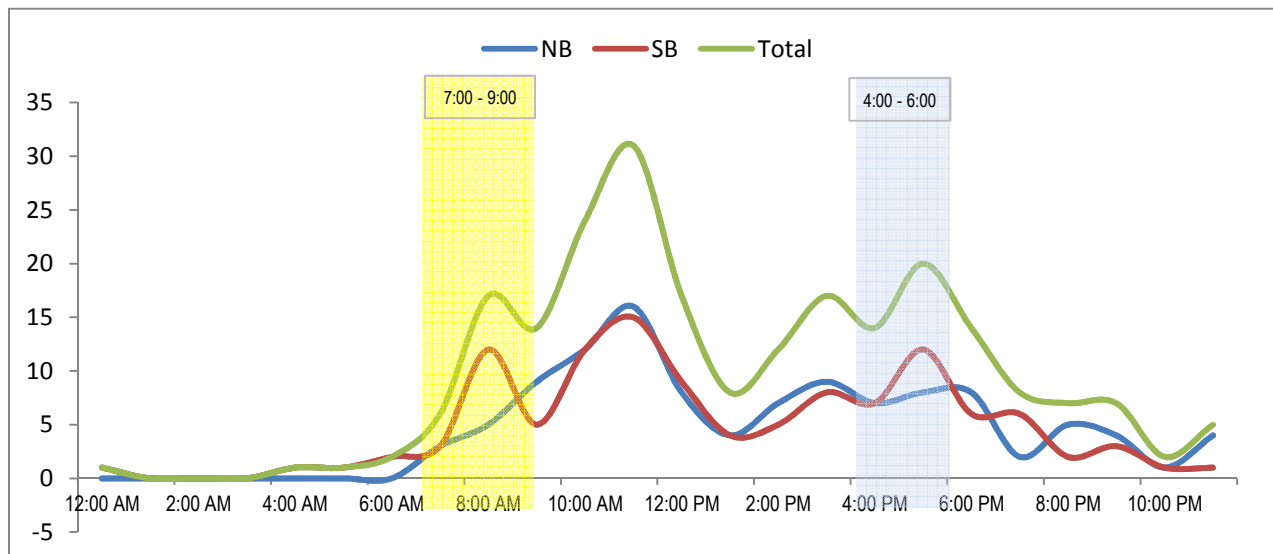



Location: 34. Cactus Road Between Airway Road and Siempre Viva Road

Orientation: North-South

Date of Count: Thursday, October 01, 2015


Analysts: DASH

Weather: Sunny

AVC Proj. No: 15-0415

24 Hour Segment Volume					2,076			
Time	Hourly Volume				Time	Hourly Volume		
	NB	SB	Total			NB	SB	Total
12:00 AM - 1:00 AM	1	4	5		12:00 PM - 1:00 PM	62	97	159
1:00 AM - 2:00 AM	3	5	8		1:00 PM - 2:00 PM	64	74	138
2:00 AM - 3:00 AM	3	5	8		2:00 PM - 3:00 PM	80	99	179
3:00 AM - 4:00 AM	6	10	16		3:00 PM - 4:00 PM	99	84	183
4:00 AM - 5:00 AM	3	17	20		4:00 PM - 5:00 PM	130	81	211
5:00 AM - 6:00 AM	13	30	43		5:00 PM - 6:00 PM	94	50	144
6:00 AM - 7:00 AM	24	59	83		6:00 PM - 7:00 PM	50	37	87
7:00 AM - 8:00 AM	21	69	90		7:00 PM - 8:00 PM	22	17	39
8:00 AM - 9:00 AM	30	97	127		8:00 PM - 9:00 PM	15	13	28
9:00 AM - 10:00 AM	51	78	129		9:00 PM - 10:00 PM	9	14	23
10:00 AM - 11:00 AM	70	90	160		10:00 PM - 11:00 PM	12	12	24
11:00 AM - 12:00 PM	92	66	158		11:00 PM - 12:00 AM	8	6	14
Total	317	530	847		Total	645	584	1,229

24-Hour	NB	Volume	962	24-Hour	SB	Volume	1,114
----------------	-----------	---------------	------------	----------------	-----------	---------------	--------------

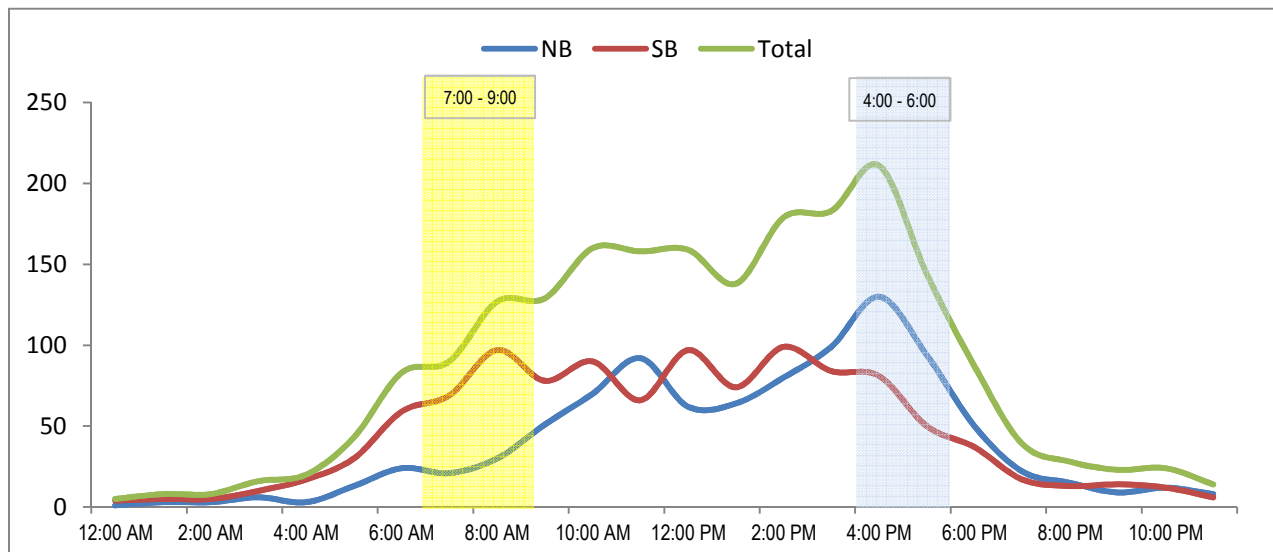

WEDNESDAY - APRIL 17, 2019

CITY: OTAY

PROJECT: PTD19-0419-01

CACTUS - N/O AIRWAY

AM Period	NB	SB	EB	WB	PM Period	NB	SB	EB	WB
00:00	1	1			12:00	3	11		
00:15	1	0			12:15	7	3		
00:30	1	1			12:30	1	3		
00:45	0	3	1	3	12:45	5	16	6	23
01:00	1	0							39
01:15	0	0			13:00	3	3		
01:30	1	0			13:15	6	4		
01:45	1	3	1	1	13:30	2	3		
02:00	0	0			13:45	4	15	4	14
02:15	0	0							29
02:30	0	0			14:00	7	5		
02:45	1	1	1	1	14:15	6	4		
03:00	0	0			14:30	6	5		
03:15	0	0			14:45	5	24	9	23
03:30	0	0							47
03:45	0	0	0	0	15:00	14	6		
04:00	0	0			15:15	2	6		
04:15	0	0			15:30	1	2		
04:30	0	1			15:45	4	21	4	18
04:45	0	0	0	1					39
05:00	0	0			16:00	10	3		
05:15	1	0			16:15	11	10		
05:30	0	1			16:30	2	7		
05:45	1	2	0	1	16:45	6	29	3	23
06:00	1	2							52
06:15	0	1			17:00	1	4		
06:30	1	1			17:15	6	6		
06:45	1	3	0	4	17:30	8	5		
07:00	3	3			17:45	5	20	4	19
07:15	0	2							39
07:30	1	3			18:00	6	3		
07:45	0	4	3	11	18:15	4	6		
08:00	2	0			18:30	1	2		
08:15	1	3			18:45	1	12	6	17
08:30	5	1							29
08:45	4	12	3	7	19:00	4	3		
09:00	6	7			19:15	1	4		
09:15	3	3			19:30	0	3		
09:30	3	6			19:45	2	7	5	15
09:45	2	14	3	19					22
10:00	3	1			20:00	2	2		
10:15	7	6			20:15	1	1		
10:30	6	4			20:30	2	1		
10:45	2	18	3	14	20:45	2	7	6	10
11:00	1	4							17
11:15	2	6			21:00	1	0		
11:30	3	2			21:15	1	1		
11:45	8	14	1	13	21:30	1	0		
					21:45	1	4	0	1
									5
					22:00	1	0		
					22:15	0	0		
					22:30	0	1		
					22:45	1	2	0	1
									3
					23:00	2	0		
					23:15	4	0		
					23:30	0	1		
					23:45	0	6	1	2
									8

Total Vol.	74	75		149		163	166		329
-------------------	----	----	--	------------	--	-----	-----	--	------------

Daily Totals				
NB	SB	EB	WB	Combined
237	241			478

AM				PM			
Split %	49.7%	50.3%	31.2%	49.5%	50.5%		68.8%
Peak Hour	11:30	11:15	11:30	14:15	14:30		14:15
Volume	21	20	38	31	26		55
P.H.F.	0.66	0.45	0.68	0.92	0.72		0.69

PACIFIC TECHNICAL DATA


Roadway	Segment	ADT 2015	ADT 2019	Change	Estimated ADT
Cactus Road	North of Airway	228	478	210%	
	South of Airway	2076	N/A	210%	4352

Estimated Volumes

Time	NB	SB	
12	1	4	5
1	3	5	8
2	3	5	8
3	6	10	16
4	3	17	20
5	13	30	43
6	24	59	83
7	21	69	90
8	30	97	127
9	51	78	129
10	70	90	160
11	92	66	158
12	62	97	159
13	64	74	138
14	80	99	179
15	99	84	183
16	130	81	211
17	94	50	144
18	50	37	87
19	22	17	39
20	15	13	28
21	9	14	23
22	12	12	24
23	8	6	14
Total	962	1114	2076

Time	NB	SB	
12	0.00	0.00	5
1	0.00	0.00	8
2	0.00	0.00	8
3	0.00	0.00	16
4	0.00	0.01	20
5	0.01	0.01	43
6	0.01	0.03	83
7	0.01	0.03	90
8	0.01	0.05	127
9	0.02	0.04	129
10	0.03	0.04	160
11	0.04	0.03	158
12	0.03	0.05	159
13	0.03	0.04	138
14	0.04	0.05	179
15	0.05	0.04	183
16	0.06	0.04	211
17	0.05	0.02	144
18	0.02	0.02	87
19	0.01	0.01	39
20	0.01	0.01	28
21	0.00	0.01	23
22	0.01	0.01	24
23	0.00	0.00	14
Total	962	1114	2076

Time	NB	SB		
12	2	8	10	
1	6	10	17	
2	6	10	17	
3	13	21	34	
4	6	36	42	
5	27	63	90	
6	50	124	174	
7	44	145	189	
8	63	203	266	<-- Peak Hour
9	107	164	270	
10	147	189	335	
11	193	138	331	
12	130	203	333	
13	134	155	289	
14	168	208	375	
15	208	176	384	
16	273	170	442	<-- Peak Hour
17	197	105	302	
18	105	78	182	
19	46	36	82	
20	31	27	59	
21	19	29	48	
22	25	25	50	
23	17	13	29	
Total	2,017	2,335	4352	4352



Location: Airway Road @ Cactus Road


Date of Count: Thursday, October 01, 2015

Analysts: LV/CD

Weather: Sunny

AVC Proj No: 15-0415





Location: Airway Road @ Cactus Road

AM Period (7:00 AM - 9:00 AM)							
	Southbound		Westbound		Northbound		
	Thru	Left	Right	Left	Right	Thru	TOTAL
7:00 AM	0	1	0	16	1	0	18
7:15 AM	0	0	0	12	5	0	17
7:30 AM	0	2	0	13	9	0	24
7:45 AM	0	0	3	28	6	0	37
8:00 AM	0	4	1	29	6	0	40
8:15 AM	0	3	2	20	9	1	35
8:30 AM	0	4	0	21	9	0	34
8:45 AM	1	0	0	26	4	1	32
Total	1	14	6	165	49	2	237

AM Intersection Peak Hour : **7:45 AM - 8:45 AM**

Intersection PHF : **0.91**


	Southbound		Westbound		Northbound		TOTAL
	Thru	Left	Right	Left	Right	Thru	
Volume	0	11	6	98	30	1	146
PHF	#####	0.69	0.50	0.84	0.83	0.25	0.91
Movement PHF	0.69		0.84			0.78	0.91

PM Period (4:00 PM - 6:00 PM)							
	Southbound		Westbound		Northbound		
	Thru	Left	Right	Left	Right	Thru	TOTAL
4:00 PM	0	1	1	19	37	1	59
4:15 PM	1	2	1	23	25	1	53
4:30 PM	0	2	0	20	31	1	54
4:45 PM	0	1	2	18	34	0	55
5:00 PM	0	3	2	16	37	1	59
5:15 PM	0	7	3	12	27	0	49
5:30 PM	0	0	0	12	17	0	29
5:45 PM	0	2	2	10	12	0	26
Total	1	18	11	130	220	4	384

PM Intersection Peak Hour : **4:00 PM - 5:00 PM**

Intersection PHF : **0.94**

	Southbound		Westbound		Northbound		TOTAL
	Thru	Left	Right	Left	Right	Thru	
Volume	1	6	4	80	127	3	221
PHF	0.25	0.75	0.5	0.87	0.858	0.75	0.94
Movement PHF	0.58		0.88			0.86	0.94



Location: Siempre Viva Road @ Cactus Road


Date of Count: Thursday, October 01, 2015

Analysts: LV/CD

Weather: Sunny

AVC Proj No: 15-0415





Location: Siempre Viva Road @ Cactus Road

AM Period (7:00 AM - 9:00 AM)													
	Southbound			Westbound			Northbound			Eastbound			TOTAL
	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	
7:00 AM	0	6	0	0	0	17	9	2	0	0	0	0	34
7:15 AM	0	12	1	1	0	14	8	2	0	0	0	0	38
7:30 AM	0	7	1	0	0	18	6	4	0	0	0	0	36
7:45 AM	0	22	0	1	0	21	7	8	0	0	0	0	59
8:00 AM	0	20	1	1	0	16	12	7	0	0	0	0	57
8:15 AM	0	8	4	0	0	21	9	4	0	0	0	0	46
8:30 AM	0	16	0	0	0	14	6	4	0	0	0	0	40
8:45 AM	0	14	1	0	0	14	8	8	0	0	0	0	45
Total	0	105	8	3	0	135	65	39	0	0	0	0	355

AM Intersection Peak Hour : **7:45 AM - 8:45 AM**

Intersection PHF : **0.86**

	Southbound			Westbound			Northbound			Eastbound			TOTAL
	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	
Volume	0	66	5	2	0	72	34	23	0	0	0	0	202
PHF	#####	0.75	0.31	0.50	#####	0.86	0.71	0.72	#####	#####	#####	#####	0.86
Movement PHF		0.81			0.84			0.75		#DIV/0!			0.86

PM Period (4:00 PM - 6:00 PM)													
	Southbound			Westbound			Northbound			Eastbound			TOTAL
	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	
4:00 PM	0	19	3	1	0	9	32	14	0	0	0	0	78
4:15 PM	0	15	1	2	0	16	26	17	0	0	0	0	77
4:30 PM	1	7	0	2	0	12	33	21	1	1	0	0	78
4:45 PM	0	14	0	1	0	0	21	23	0	0	0	0	59
5:00 PM	0	13	1	0	0	8	33	11	0	0	0	0	66
5:15 PM	0	11	1	0	0	8	20	15	0	0	0	0	55
5:30 PM	0	11	1	0	0	3	9	12	0	0	0	0	36
5:45 PM	0	6	3	0	0	9	13	6	0	0	0	0	37
Total	1	96	10	6	0	65	187	119	1	1	0	0	486

PM Intersection Peak Hour : **4:00 PM - 5:00 PM**

Intersection PHF : **0.94**

	Southbound			Westbound			Northbound			Eastbound			TOTAL
	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	Right	Thru	Left	
Volume	1	55	4	6	0	37	112	75	1	1	0	0	292
PHF	0.25	0.724	0.333	0.75	#####	0.578	0.848	0.815	0.25	0.25	#####	#####	0.94
Movement PHF		0.68			0.60			0.85		0.25			0.94

INTERSECTION TURNING MOVEMENT COUNTS


PREPARED BY: PACIFIC TECHNICAL DATA

DATE: 4/17/19 WEDNESDAY	LOCATION: NORTH & SOUTH: EAST & WEST:	OTAY CACTUS AIRWAY	PROJECT #: LOCATION #: CONTROL:	PTD19-0419-01 4 SIGNAL
-------------------------------	---	--------------------------	---------------------------------------	------------------------------

NOTES:	AM PM MD OTHER OTHER	▲ N ◀ W S ▼	▶ E
INCLUDES BIKE & PED			

	NORTHBOUND CACTUS			SOUTHBOUND CACTUS			EASTBOUND AIRWAY			WESTBOUND AIRWAY			TOTAL
LANES:	NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	
AM													
7:00 AM		1	8	2	0					14		1	26
7:15 AM		2	3	0	0					14		0	19
7:30 AM		0	3	3	0					22		1	29
7:45 AM		1	2	2	0					19		0	24
8:00 AM		0	7	0	0					31		2	40
8:15 AM		0	4	3	0					22		1	30
8:30 AM		0	7	1	0					25		5	38
8:45 AM		0	4	4	0					26		5	39
VOLUMES	0	4	38	15	0	0	0	0	0	173	0	15	245
APPROACH %	0%	10%	90%	100%	0%	0%	0%	0%	0%	92%	0%	8%	
APP/DEPART	42	/	19	15	/	173	0	/	53	188	/	0	0
BEGIN PEAK HR	8:00 AM												
VOLUMES	0	0	22	8	0	0	0	0	0	104	0	13	147
APPROACH %	0%	0%	100%	100%	0%	0%	0%	0%	0%	89%	0%	11%	
PEAK HR FACTOR	0.786			0.500			0.000			0.886			0.919
APP/DEPART	22	/	13	8	/	104	0	/	30	117	/	0	0
PM													
4:00 PM		0	19	4	0					24		8	55
4:15 PM		1	18	8	2					20		8	57
4:30 PM		0	44	7	0					24		2	77
4:45 PM		0	19	3	0					17		6	45
5:00 PM		0	31	4	0					14		1	50
5:15 PM		0	31	5	0					15		6	57
5:30 PM		0	16	5	0					9		9	39
5:45 PM		0	8	4	0					9		4	25
VOLUMES	0	1	186	40	2	0	0	0	0	132	0	44	405
APPROACH %	0%	1%	99%	95%	5%	0%	0%	0%	0%	75%	0%	25%	
APP/DEPART	187	/	45	42	/	134	0	/	226	176	/	0	0
BEGIN PEAK HR	4:00 PM												
VOLUMES	0	1	100	22	2	0	0	0	0	85	0	24	234
APPROACH %	0%	1%	99%	92%	8%	0%	0%	0%	0%	78%	0%	22%	
PEAK HR FACTOR	0.574			0.600			0.000			0.852			0.760
APP/DEPART	101	/	25	24	/	87	0	/	122	109	/	0	0

U-TURNS				
NB	SB	EB	WB	TTL
X	X	X	X	
				0
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

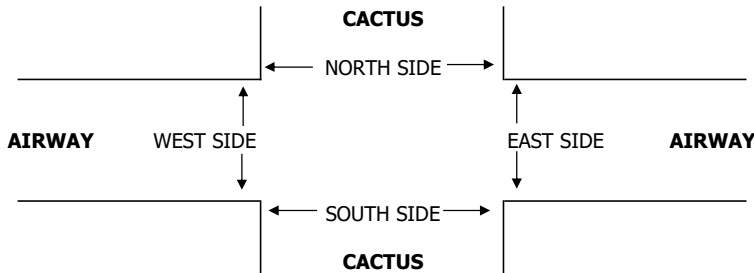

AM	
7:00 AM	
7:15 AM	
7:30 AM	
7:45 AM	
8:00 AM	
8:15 AM	
8:30 AM	
8:45 AM	
TOTAL	
PM	
4:00 PM	
4:15 PM	
4:30 PM	
4:45 PM	
5:00 PM	
5:15 PM	
5:30 PM	
5:45 PM	
TOTAL	

PEDESTRIAN CROSSINGS				
N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

PEDESTRIAN ACTIVATIONS				
N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

BICYCLE CROSSINGS				
NS	SS	ES	WS	TOTAL
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

INTERSECTION TURNING MOVEMENT COUNTS


PREPARED BY: PACIFIC TECHNICAL DATA

DATE: 4/17/19 WEDNESDAY	LOCATION: NORTH & SOUTH: EAST & WEST:	OTAY CACTUS AIRWAY	PROJECT #: LOCATION #: CONTROL:	PTD19-0419-01 4 SIGNAL
-------------------------------	---	--------------------------	---------------------------------------	------------------------------

NOTES:	AM PM MD OTHER OTHER	▲ N ◀ W S ▼	▶ E
INCLUDES BIKE & PED			

	NORTHBOUND CACTUS			SOUTHBOUND CACTUS			EASTBOUND AIRWAY			WESTBOUND AIRWAY			TOTAL
LANES:	NL	NT	NR	SL	ST	SR	EL	ET	ER	WL	WT	WR	
AM													
7:00 AM		1	8	2	0					14		1	26
7:15 AM		2	3	0	0					14		0	19
7:30 AM		0	3	3	0					22		1	29
7:45 AM		1	2	2	0					19		0	24
8:00 AM		0	7	0	0					31		2	40
8:15 AM		0	4	3	0					22		1	30
8:30 AM		0	7	1	0					25		5	38
8:45 AM		0	4	4	0					26		5	39
VOLUMES	0	4	38	15	0	0	0	0	0	173	0	15	245
APPROACH %	0%	10%	90%	100%	0%	0%	0%	0%	0%	92%	0%	8%	
APP/DEPART	42	/	19	15	/	173	0	/	53	188	/	0	0
BEGIN PEAK HR	8:00 AM												
VOLUMES	0	0	22	8	0	0	0	0	0	104	0	13	147
APPROACH %	0%	0%	100%	100%	0%	0%	0%	0%	0%	89%	0%	11%	
PEAK HR FACTOR	0.786			0.500			0.000			0.886			0.919
APP/DEPART	22	/	13	8	/	104	0	/	30	117	/	0	0
PM													
4:00 PM		0	19	4	0					24		8	55
4:15 PM		1	18	8	2					20		8	57
4:30 PM		0	44	7	0					24		2	77
4:45 PM		0	19	3	0					17		6	45
5:00 PM		0	31	4	0					14		1	50
5:15 PM		0	31	5	0					15		6	57
5:30 PM		0	16	5	0					9		9	39
5:45 PM		0	8	4	0					9		4	25
VOLUMES	0	1	186	40	2	0	0	0	0	132	0	44	405
APPROACH %	0%	1%	99%	95%	5%	0%	0%	0%	0%	75%	0%	25%	
APP/DEPART	187	/	45	42	/	134	0	/	226	176	/	0	0
BEGIN PEAK HR	4:00 PM												
VOLUMES	0	1	100	22	2	0	0	0	0	85	0	24	234
APPROACH %	0%	1%	99%	92%	8%	0%	0%	0%	0%	78%	0%	22%	
PEAK HR FACTOR	0.574			0.600			0.000			0.852			0.760
APP/DEPART	101	/	25	24	/	87	0	/	122	109	/	0	0

U-TURNS				
NB	SB	EB	WB	TTL
X	X	X	X	
				0
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

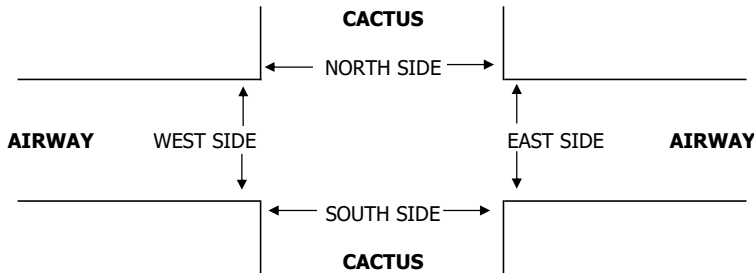

AM	
7:00 AM	
7:15 AM	
7:30 AM	
7:45 AM	
8:00 AM	
8:15 AM	
8:30 AM	
8:45 AM	
TOTAL	
PM	
4:00 PM	
4:15 PM	
4:30 PM	
4:45 PM	
5:00 PM	
5:15 PM	
5:30 PM	
5:45 PM	
TOTAL	

PEDESTRIAN CROSSINGS				
N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

PEDESTRIAN ACTIVATIONS				
N SIDE	S SIDE	E SIDE	W SIDE	TOTAL
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

BICYCLE CROSSINGS				
NS	SS	ES	WS	TOTAL
				0
				0
				0
				0
				0
				0
				0
0	0	0	0	0
				0
				0
				0
				0
				0
				0
0	0	0	0	0

Cactus Road & Airway Road - 2015

AM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
0	1	30	11	0	0	0	0	0	98	0	6

Total
146

PM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
0	3	127	6	1	0	0	0	0	80	0	4

Total
221

Cactus Road & Airway Road - 2019

AM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
0	0	22	8	0	0	0	0	0	104	0	13

Total
147

Growth
1%

PM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
0	1	100	22	2	0	0	0	0	85	0	24

Total
234

Growth
6%

Cactus Road & Siempre Viva Road - 2015

AM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
0	23	34	5	66	0	0	0	0	72	0	2

Total
202

Growth to be applied	Total
1%	204

PM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
1	75	112	4	55	1	0	0	1	37	0	6

Total
292

Growth to be applied	Total
6%	310

Cactus Road & Siempre Viva Road - 2019

AM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
0	23	34	5	67	0	0	0	0	73	0	2

Total
204

PM Peak Hour

NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
1	80	119	4	58	1	0	0	1	39	0	6

Total
310

Attachment 2 – Analysis Methodology

2.0 Analysis Methodology

This TIS was performed in accordance with the requirements of the *City of San Diego Traffic Impact Study Manual, July 1998*, the *City of San Diego Significance Determination Thresholds, January 2011*, and the enhanced California Environmental Quality Act (CEQA) project review process. Detailed information on roadway segment and intersection analysis methodologies, standards, and thresholds are discussed in the following sections.

2.1 Level of Service Definition

Level of Service (LOS) is a quantitative measure describing operational conditions within a traffic stream, and the motorist's and/or passengers' perception of operations. A LOS definition generally describes these conditions in terms of such factors as delay, speed, travel time, freedom to maneuver, interruptions in traffic flow, queuing, comfort, and convenience. **Table 2.1** describes generalized definitions of the various LOS categories (A through F) as applied to roadway operations.

TABLE 2.1
LEVEL OF SERVICE DEFINITIONS

LOS Category	Definition of Operation
A	This LOS represents a completely free-flow condition, where the operation of vehicles is virtually unaffected by the presence of other vehicles and only constrained by the geometric features of the highway and by driver preferences.
B	This LOS represents a relatively free-flow condition, although the presence of other vehicles becomes noticeable. Average travel speeds are the same as in LOS A, but drivers have slightly less freedom to maneuver.
C	At this LOS the influence of traffic density on operations becomes marked. The ability to maneuver within the traffic stream is clearly affected by other vehicles.
D	At this LOS, the ability to maneuver is notably restricted due to traffic congestion, and only minor disruptions can be absorbed without extensive queues forming and the service deteriorating.
E	This LOS represents operations at or near capacity. LOS E is an unstable level, with vehicles operating with minimum spacing for maintaining uniform flow. At LOS E, disruptions cannot be dissipated readily thus causing deterioration down to LOS F.
F	At this LOS, forced or breakdown of traffic flow occurs, although operations appear to be at capacity, queues form behind these breakdowns. Operations within queues are highly unstable, with vehicles experiencing brief periods of movement followed by stoppages.

Source: Highway Capacity Manual 2000

2.2 Roadway Segment Level of Service Standards and Thresholds

Roadway segment LOS standards and thresholds provide the basis for analysis of arterial roadway segment performance. The analysis of roadway segment LOS is based on the functional classification of the roadway, the maximum capacity, roadway geometrics, and existing or forecast Average Daily Traffic (ADT) volumes. **Table 2.2** and **Table 2.3** present the roadway segment capacity and LOS standards for the City of San Diego and the City of Chula Vista, respectively. These standards were utilized to analyze roadways evaluated in this report.

TABLE 2.2
CITY OF SAN DIEGO
ROADWAY CLASSIFICATIONS AND LOS STANDARDS

Roadway Classification	LOS A	LOS B	LOS C	LOS D	LOS E
Expressway (6-lane)	< 30,000	< 42,000	< 60,000	< 70,000	< 80,000
Prime Arterial (6-lane)	< 25,000	< 35,000	< 50,000	< 55,000	< 60,000
Prime Arterial (5-lane)	< 20,000	< 28,000	< 40,000	< 45,000	< 50,000
Prime Arterial (4-lane)	< 17,500	< 24,500	< 35,000	< 40,000	< 45,000
Major Arterial (6-lane, divided)	< 20,000	< 28,000	< 40,000	< 45,000	< 50,000
Major Arterial (4-lane, divided)	< 15,000	< 21,000	< 30,000	< 35,000	< 40,000
Major Arterial (3-lane, divided)	< 11,250	< 15,750	< 22,500	< 26,250	< 30,000
Collector (4-lane w/ center lane)	< 10,000	< 14,000	< 20,000	< 25,000	< 30,000
Collector (4-lane w/o center lane)	< 5,000	< 7,000	< 10,000	< 13,000	< 15,000
Collector (2-lane w/continuous left-turn lane)	< 5,000	< 7,000	< 10,000	< 13,000	< 15,000
Collector (2-lane no fronting property)	< 4,000	< 5,500	< 7,500	< 9,000	< 10,000
Collector (2-lane w/commercial fronting)	< 2,500	< 3,500	< 5,000	< 6,500	< 8,000
Collector (2-lane multi-family)	< 2,500	< 3,500	< 5,000	< 6,500	< 8,000
Sub-Collector (2-lane single-family)	-	-	< 2,200	-	-

Source: City of San Diego Traffic Impact Study Manual (1998)

These standards are generally used as long-range planning guidelines to determine the functional classification of roadways. The actual capacity of a roadway facility varies according to its physical attributes. Typically, the performance and LOS of a roadway segment is heavily influenced by the ability of its intersections to accommodate peak hour traffic volumes. For the purposes of this traffic analysis, LOS D is considered acceptable for circulation element roadway segments within the City of San Diego.

TABLE 2.3
CITY OF CHULA VISTA
ROADWAY CLASSIFICATION AND LOS STANDARDS

Roadway Classification	LOS A	LOS B	LOS C	LOS D	LOS E
Expressway (7 or 8-lane)	52,500	61,300	70,000	78,800	87,500
Gateway Street (6-lane)	40,800	47,600	54,400	61,200	68,000
Prime Arterial (6-lane)	37,500	43,800	50,000	56,300	62,500
Major Street (6-lane)	30,000	35,000	40,000	45,000	50,000
Major Street (4-lane)	22,500	26,300	30,000	33,800	37,500
Town Center Arterial (6-lane)	37,500	43,800	50,000	56,300	62,500
Town Center Arterial (4-lane)	22,500	26,300	30,000	33,800	37,500
Class I Collector (4-lane)	16,500	19,300	22,000	24,800	27,500
Class II Collector (3-lane)	9,000	10,500	12,000	13,500	15,000
Class III Collector (2-lane)	5,600	6,600	7,500	8,400	9,400

Source: City of Chula Vista

Note:

Bold numbers indicate the ADT thresholds for acceptable LOS.

LOS C is considered acceptable for Circulation Element roadway segments within the City of Chula Vista. Per the Otay SRP (Page 104), LOS D is permitted within the Otay Ranch Villages. Heritage Road, between Main Street and Avenida De Las Vistas was analyzed using City of Chula Vista standards.

2.3 Peak Hour Intersection Level of Service Standards and Thresholds

This section presents the methodologies used to perform peak hour intersection capacity analysis, including both signalized and unsignalized intersections. The following assumptions were utilized in conducting all intersection level of service analyses:

- *Heavy Vehicle Factor:* Based on heavy vehicle count data collected April 16-17, 2019.
- *Signal Timing:* Based on existing signal timing plans (as of May 2019), provided in **Appendix A**.
- *Peak Hour Factor:* Based on existing peak hour count data for existing conditions, 0.92 for near-term year 2023, and 0.95 for Buildout of Community Plan scenarios. All PHF utilized in the analysis is per approach.

Signalized Intersection Analysis

The proposed Lumina II project is part of the Otay Mesa Central Village Specific Plan EIR (SCH No. 2004651076). Therefore, the same analysis methodology was employed in this report to be consistent with the Otay Mesa Central Village Transportation Facilities Trigger Analysis. This method defines LOS in terms of delay, or more specifically, average stopped delay per vehicle. Delay is a measure of driver and/or passenger discomfort, frustration, fuel consumption and lost travel time. This technique uses 1,900 vehicles per hour per lane (VPHPL) as the maximum saturation volume of an intersection. This saturation volume is adjusted to account for lane width, on-street parking, pedestrians, traffic composition (i.e., percentage trucks) and shared lane movements (i.e. through and right-turn movements originating from the same lane). The LOS criteria used for this technique are described in **Table 2.4**. The computerized analysis of intersection operations was performed utilizing the *SYNCHRO 10.0* traffic analysis software.

TABLE 2.4
SIGNALIZED INTERSECTION LEVEL OF SERVICE CRITERIA

Average Stopped Delay Per Vehicle (seconds)	Level of Service (LOS) Characteristics
<10.0	<i>LOS A</i> describes operations with very low delay. This occurs when progression is extremely favorable, and most vehicles do not stop at all. Short cycle lengths may also contribute to low delay.
10.1 – 20.0	<i>LOS B</i> describes operations with generally good progression and/or short cycle lengths. More vehicles stop than for <i>LOS A</i> , causing higher levels of average delay.
20.1 – 35.0	<i>LOS C</i> describes operations with higher delays, which may result from fair progression and/or longer cycle lengths. Individual cycle failures may begin to appear at this level. The number of vehicles stopping is significant at this level, although many still pass through the intersection without stopping.
35.1 – 55.0	<i>LOS D</i> describes operations with high delay, resulting from some combination of unfavorable progression, long cycle lengths, or high volumes. The influence of congestion becomes more noticeable, and individual cycle failures are noticeable.
55.1 – 80.0	<i>LOS E</i> is considered the limit of acceptable delay. Individual cycle failures are frequent occurrences.
>80.0	<i>LOS F</i> describes a condition of excessively high delay, considered unacceptable to most drivers. This condition often occurs when arrival flow rates exceed the <i>LOS D</i> capacity of the intersection. Poor progression and long cycle lengths may also be major contributing causes to such delay.

Source: Highway Capacity Manual 2000, TRB Special Report 209

Unsignalized Intersection Analysis

Unsignalized intersections, including side-street and all-way stop controlled intersections, were analyzed using the unsignalized intersection analysis methodology employed in the Otay Mesa Central Village Transportation Facilities Trigger Analysis. The SYNCHRO 10.0 Traffic Analysis software supports this methodology and was utilized to produce LOS results. The LOS for a side-street stop controlled (SSSC) intersection is determined by the computed control delay and is defined for each minor movement and the worst-case minor movement is reported. The LOS for an all-way stop controlled (AWSC) intersection is determined by the computed control delay or measured average control delay of all movements. **Table 2.5** summarizes the LOS criteria for unsignalized intersections. The City of San Diego considers LOS D or better during the AM and PM peak hours to be acceptable for intersection LOS.

TABLE 2.5
UNSIGNALIZED INTERSECTION LEVEL OF SERVICE CRITERIA

Average Control Delay (sec/veh)	Level of Service (LOS)
≤ 10	A
> 10 and ≤ 15	B
> 15 and ≤ 25	C
> 25 and ≤ 35	D
> 35 and ≤ 50	E
> 50	F

Source: Highway Capacity Manual 2000, TRB Special Report 209

2.4 Ramp Metering Analysis

Ramp metering is a means of controlling the volume of traffic entering the freeway with the goal of improving the traffic operations and flow on the freeway main lanes. Freeway ramp meter analysis estimates the peak hour queues and delays at freeway ramps by comparing existing volumes to the meter rate at the given location. However, ramp meters are currently installed but not in operation within the project study area. Therefore, ramp metering analysis is only included in the Buildout of Community Plan Scenario.

Meter rates used in the analysis (only under Buildout of Community Plan scenario) were obtained from the OM CPU. Ramp metering analyses to calculate delays at the study area freeway on-ramps were conducted based upon procedures outlined in the *City of San Diego Traffic Impact Study Manual (1998)*.

2.5 Freeway Level of Service Standards and Thresholds

Freeway level of service analysis is based upon procedures developed by Caltrans District 11. The procedure for calculating freeway level of service involves estimating a peak hour volume to capacity (V/C) ratio. Peak hour volumes are estimated from the application of design hour ("K"), directional ("D") and truck ("T") factors to Average Daily Traffic (ADT) volumes. The base capacities were assumed to be 2,350 passenger-car per hour per main lane (pc/h/ln) and 1,410 pc/h/ln for auxiliary lane, respectively. A 0.95 peak-hour factor (PHF) is utilized for this analysis.

The resulting V/C ratio is then compared to acceptable ranges of V/C values corresponding to the various levels of service for each facility classification, as shown in **Table 2.6**. The corresponding level of service represents an approximation of existing or anticipated future freeway operating conditions in the peak direction of travel during the peak hour.

LOS D or better is used in this study as the threshold for acceptable freeway operations based upon Caltrans and the SANDAG Regional Growth Management Strategy (RGMS) requirements.

TABLE 2.6
CALTRANS DISTRICT 11
FREEWAY SEGMENT LEVEL OF SERVICE DEFINITIONS

LOS	V/C	Congestion/Delay	Traffic Description
<i>Used for freeways, expressways and conventional highways</i>			
"A"	<0.41	None	Free flow.
"B"	0.42-0.62	None	Free to stable flow, light to moderate volumes.
"C"	0.63-0.79	None to minimal	Stable flow, moderate volumes, freedom to maneuver noticeably restricted.
"D"	0.80-0.92	Minimal to substantial	Approaches unstable flow, heavy volumes, very limited freedom to maneuver.
"E"	0.93-1.00	Significant	Extremely unstable flow, maneuverability and psychological comfort extremely poor.
<i>Used for conventional highways</i>			
"F"	>1.00	Considerable	Forced or breakdown flow. Delay measured in average travel speed (MPH). Signalized segments experience delays >60.0 seconds/vehicle.
<i>Used for freeways and expressways</i>			
"F0"	1.01–1.25	Considerable (0-1 hour delay)	Forced flow, heavy congestion, long queues form behind breakdown points, stop and go.
"F1"	1.26-1.35	Severe (1-2 hour delay)	Very heavy congestion, very long queues.
"F2"	1.36-1.45	Very severe (2-3 hour delay)	Extremely heavy congestion, longer queues, more numerous breakdown points, longer stop periods.
"F3"	>1.46	Extremely severe (3+ hours of delay)	Gridlock.

Source: SANTEC/ITE Guidelines for TIS in the San Diego Region

2.6 Determination of Significant Impacts

City of San Diego

The *City of San Diego Significance Determination Thresholds* defines project impact thresholds by facility type. These thresholds are generally based upon an acceptable increase in the Volume / Capacity (V/C) ratio for roadway and freeway segments, and upon increases in vehicle delays for intersections and ramps.

In the City of San Diego, LOS D is considered acceptable for roadway and intersection operations. A project is considered to have a significant impact if it degrades the operations of a roadway or intersection from an acceptable LOS (D or better) to an unacceptable LOS (E or F), or if it adds additional delay to a facility already operating an unacceptable level. **Table 2.7** summarizes the impact significant thresholds as identified by the City of San Diego beyond which mitigation measures are required.

TABLE 2.7
MEASURE OF SIGNIFICANT PROJECT TRAFFIC IMPACTS

Level of Service (LOS) with Project*	Allowable Change Due to Impact**					
	Freeways		Roadway Segments		Intersections	Ramp Metering
	V/C	Speed (mph)	V/C	Speed (mph)	Delay (sec)	Delay (min.)
LOS E (or ramp meter delays > 15 min.)	0.010	1.0	0.02	1.0	2.0	2.0
LOS F (or ramp meter delays > 15 min.)	0.005	0.5	0.01	0.5	1.0	1.0

Source: *City of San Diego, Significance Determination Thresholds (January 2011)*

* All level of service (LOS) measurements are based upon HCM procedures for peak-hour conditions. However, vehicle to capacity (V/C) ratios for roadway segments may be estimated on an ADT/24-hour traffic volume basis (using Table 2.1 or a similar LOS chart for each jurisdiction). The acceptable LOS for freeways, roadways, and intersections is generally "D" ("C" for undeveloped or not densely developed locations per jurisdiction definitions). For metered freeway ramps, LOS does not apply. However, ramp meter delays above 15 minutes are considered excessive.

** If a proposed project's traffic causes the values shown in the table to be exceeded, the impacts are determined to be significant. These impact changes may be measured from appropriate computer programs or expanded manual spreadsheets. The project applicant shall then identify feasible mitigation (within the Traffic Impact Study report) that will maintain the traffic facility at an acceptable LOS. If the LOS with the proposed project becomes unacceptable (see above * note), or if the project adds a significant amount of peak-hour trips to cause any traffic queues to exceed on- or off-ramp storage capacities, the project applicant shall be responsible for mitigating significant impact changes.

City of Chula Vista

Within the City of Chula Vista, traffic impacts are defined as either *project-specific impacts* or *cumulative impacts*. *Project-specific impacts* are those impacts for which the addition of project trips results in an identifiable degradation in Level of Service on freeway segments, roadway segments, or at intersections, triggering the need for specific project-related improvement strategies. *Cumulative impacts* are those in which the project trips incrementally contribute to a poor Level of Service in conjunction with other projects and existing traffic.

The following discussion outlines City of Chula Vista criteria for determining whether a project results in either project-specific or cumulative impacts on roadway segments. The City of Chula Vista maintains different significance standards for short-term and long-term conditions.

Short-Term (Study Horizon Year 0 To 4)

Roadway Segments

If the roadway segment volume to capacity (v/c) ratio indicates LOS C or better, there would be no project-specific or cumulative impact in the short-term. If the roadway segment volume to capacity ratio indicates LOS D, E or F, and the Growth Management Oversight Commission method is utilized, the following significance criteria apply:

- Direct Project specific impacts would occur to roadway segments under short-term conditions in the City of Chula Vista if all of the following conditions were found:
 - The roadway segment is projected to operate at LOS D for more than 2 hours or LOS E/F for 1 hour;
 - The project trips comprise 5% or more of the roadway segment volume; and
 - The project adds more than 800 ADT to the roadway segment.

Cumulative impacts would occur to a roadway segment under short-term conditions only if the roadway segment is projected to operate at LOS D for more than 2 hours or LOS E/F for 1 hour.

Long-Term (Study Horizon Year 5 and Later)

Roadway Segments

Direct Project-specific impacts would occur to roadway segments under long-term conditions in the City of Chula Vista if all of the following conditions are found:

- The roadway is projected to operate at LOS D, LOS E, or LOS F;
- The project trips comprise 5% or more of total segment volume; and
- The project adds more than 800 ADT to the roadway segment.

Cumulative impacts would occur to a roadway segment under long-term conditions if they are projected to operate at LOS D, E or F. However, in cases where roadway segments are projected to operate at LOS D or E under long-term conditions and all intersections along this segment are projected to operate at LOS D or better, the roadway segment impact (project-specific or cumulative) would *not* be significant since intersection analysis is more indicative of actual roadway system operations. However, if a roadway segment is projected to operate at LOS F under long-term conditions, the impact (direct project-specific or cumulative) would be significant regardless of intersection LOS.





Attachment 3 – Peak Hour Intersection Calculation Worksheets –
Existing Conditions

Existing AM
1: Cactus Road & Airway Road

04/08/2020

Intersection

Int Delay, s/veh 7.6

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	104	13	0	22	8	0
Future Vol, veh/h	104	13	0	22	8	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	50	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	89	89	79	79	50	50
Heavy Vehicles, %	10	10	10	10	10	10
Mvmt Flow	117	15	0	28	16	0

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	46	14	0	0	28
Stage 1	14	-	-	-	-
Stage 2	32	-	-	-	-
Critical Hdwy	6.5	6.3	-	-	4.2
Critical Hdwy Stg 1	5.5	-	-	-	-
Critical Hdwy Stg 2	5.5	-	-	-	-
Follow-up Hdwy	3.59	3.39	-	-	2.29
Pot Cap-1 Maneuver	944	1043	-	-	1535
Stage 1	988	-	-	-	-
Stage 2	970	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	935	1043	-	-	1535
Mov Cap-2 Maneuver	935	-	-	-	-
Stage 1	988	-	-	-	-
Stage 2	960	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	9.3	0	7.4
HCM LOS	A		

Minor Lane/Major Mvmt	NBT	NBRWBLn1WBLn2	SBL	SBT
Capacity (veh/h)	-	- 935 1043	1535	-
HCM Lane V/C Ratio	-	- 0.125 0.014	0.01	-
HCM Control Delay (s)	-	- 9.4 8.5	7.4	0
HCM Lane LOS	-	- A A	A	A
HCM 95th %tile Q(veh)	-	- 0.4 0	0	-

Existing AM
2: Cactus Road & Siempre Viva Road

04/08/2020

Intersection

Intersection Delay, s/veh	7.9
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	0	73	0	2	0	23	34	5	67	0
Future Vol, veh/h	0	0	0	73	0	2	0	23	34	5	67	0
Peak Hour Factor	0.92	0.92	0.92	0.84	0.84	0.84	0.75	0.75	0.75	0.81	0.81	0.81
Heavy Vehicles, %	10	10	10	10	10	10	10	10	10	10	10	10
Mvmt Flow	0	0	0	87	0	2	0	31	45	6	83	0
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	0	8.2	7.4	7.9
HCM LOS	-	A	A	A





Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	0%	0%	97%	7%
Vol Thru, %	40%	100%	0%	93%
Vol Right, %	60%	0%	3%	0%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	57	0	75	72
LT Vol	0	0	73	5
Through Vol	23	0	0	67
RT Vol	34	0	2	0
Lane Flow Rate	76	0	89	89
Geometry Grp	1	1	1	1
Degree of Util (X)	0.083	0	0.112	0.106
Departure Headway (Hd)	3.936	4.539	4.533	4.299
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	895	0	782	824
Service Time	2.026	2.539	2.613	2.378
HCM Lane V/C Ratio	0.085	0	0.114	0.108
HCM Control Delay	7.4	7.5	8.2	7.9
HCM Lane LOS	A	N	A	A
HCM 95th-tile Q	0.3	0	0.4	0.4

Existing PM
1: Cactus Road & Airway Road

04/08/2020

Intersection

Int Delay, s/veh 4.5

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	85	24	1	100	22	2
Future Vol, veh/h	85	24	1	100	22	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	50	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	57	57	60	60
Heavy Vehicles, %	10	10	10	10	10	10
Mvmt Flow	100	28	2	175	37	3

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	167	90	0	0	177
Stage 1	90	-	-	-	-
Stage 2	77	-	-	-	-
Critical Hdwy	6.5	6.3	-	-	4.2
Critical Hdwy Stg 1	5.5	-	-	-	-
Critical Hdwy Stg 2	5.5	-	-	-	-
Follow-up Hdwy	3.59	3.39	-	-	2.29
Pot Cap-1 Maneuver	805	946	-	-	1352
Stage 1	914	-	-	-	-
Stage 2	926	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	783	946	-	-	1352
Mov Cap-2 Maneuver	783	-	-	-	-
Stage 1	914	-	-	-	-
Stage 2	901	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	10	0	7.1
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBRWBLn1WBLn2	SBL	SBT
Capacity (veh/h)	-	- 783 946 1352	-	-
HCM Lane V/C Ratio	-	- 0.128 0.03 0.027	-	-
HCM Control Delay (s)	-	- 10.3 8.9 7.7	0	
HCM Lane LOS	-	- B A A	A	
HCM 95th %tile Q(veh)	-	- 0.4 0.1 0.1	-	-

Existing PM
2: Cactus Road & Siempre Viva Road

04/08/2020

Intersection

Intersection Delay, s/veh	8.4
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	1	39	0	6	1	80	119	4	58	1
Future Vol, veh/h	0	0	1	39	0	6	1	80	119	4	58	1
Peak Hour Factor	0.25	0.25	0.25	0.60	0.60	0.60	0.85	0.85	0.85	0.68	0.68	0.68
Heavy Vehicles, %	10	10	10	10	10	10	10	10	10	10	10	10
Mvmt Flow	0	0	4	65	0	10	1	94	140	6	85	1
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	7.3	8.4	8.5	8.1
HCM LOS	A	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	1%	0%	87%	6%
Vol Thru, %	40%	0%	0%	92%
Vol Right, %	59%	100%	13%	2%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	200	1	45	63
LT Vol	1	0	39	4
Through Vol	80	0	0	58
RT Vol	119	1	6	1
Lane Flow Rate	235	4	75	93
Geometry Grp	1	1	1	1
Degree of Util (X)	0.263	0.005	0.102	0.116
Departure Headway (Hd)	4.025	4.27	4.873	4.5
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	899	839	737	799
Service Time	2.025	2.293	2.892	2.515
HCM Lane V/C Ratio	0.261	0.005	0.102	0.116
HCM Control Delay	8.5	7.3	8.4	8.1
HCM Lane LOS	A	A	A	A
HCM 95th-tile Q	1.1	0	0.3	0.4





Attachment 4 – Peak Hour Intersection Calculation Worksheets –
Existing With Project Conditions

Existing + Project AM
1: Cactus Road & Airway Road

Existing + Project AM

Intersection

Int Delay, s/veh 6

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	116	13	0	72	8	0
Future Vol, veh/h	116	13	0	72	8	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	50	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	89	89	79	79	50	50
Heavy Vehicles, %	10	10	10	10	10	10
Mvmt Flow	130	15	0	91	16	0

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	78	46	0	0	91	0
Stage 1	46	-	-	-	-	-
Stage 2	32	-	-	-	-	-
Critical Hdwy	6.5	6.3	-	-	4.2	-
Critical Hdwy Stg 1	5.5	-	-	-	-	-
Critical Hdwy Stg 2	5.5	-	-	-	-	-
Follow-up Hdwy	3.59	3.39	-	-	2.29	-
Pot Cap-1 Maneuver	905	1001	-	-	1455	-
Stage 1	956	-	-	-	-	-
Stage 2	970	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	895	1001	-	-	1455	-
Mov Cap-2 Maneuver	895	-	-	-	-	-
Stage 1	956	-	-	-	-	-
Stage 2	959	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	9.6	0	7.5
HCM LOS	A		

Minor Lane/Major Mvmt	NBT	NBRWBLn1WBLn2	SBL	SBT
Capacity (veh/h)	-	- 895 1001 1455	-	-
HCM Lane V/C Ratio	-	- 0.146 0.015 0.011	-	-
HCM Control Delay (s)	-	- 9.7 8.7 7.5	0	
HCM Lane LOS	-	- A A A	A	
HCM 95th %tile Q(veh)	-	- 0.5 0 0	-	

Existing + Project AM
2: Cactus Road & Siempre Viva Road

Existing + Project AM

Intersection	
Intersection Delay, s/veh	7.9
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	0	73	0	3	0	23	34	6	67	0
Future Vol, veh/h	0	0	0	73	0	3	0	23	34	6	67	0
Peak Hour Factor	0.92	0.92	0.92	0.84	0.84	0.84	0.75	0.75	0.75	0.81	0.81	0.81
Heavy Vehicles, %	10	10	10	10	10	10	10	10	10	10	10	10
Mvmt Flow	0	0	0	87	0	4	0	31	45	7	83	0
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	0	8.2	7.4	7.9
HCM LOS	-	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	0%	0%	96%	8%
Vol Thru, %	40%	100%	0%	92%
Vol Right, %	60%	0%	4%	0%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	57	0	76	73
LT Vol	0	0	73	6
Through Vol	23	0	0	67
RT Vol	34	0	3	0
Lane Flow Rate	76	0	90	90
Geometry Grp	1	1	1	1
Degree of Util (X)	0.083	0	0.114	0.108
Departure Headway (Hd)	3.939	4.544	4.525	4.304
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	895	0	783	822
Service Time	2.031	2.544	2.606	2.385
HCM Lane V/C Ratio	0.085	0	0.115	0.109
HCM Control Delay	7.4	7.5	8.2	7.9
HCM Lane LOS	A	N	A	A
HCM 95th-tile Q	0.3	0	0.4	0.4






Existing + Project AM
3: Cactus Road & Street C

Existing + Project AM

Intersection

Intersection Delay, s/veh 8.2

Intersection LOS A

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	50	1	1	63	203	12
Future Vol, veh/h	50	1	1	63	203	12
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	54	1	1	68	221	13
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	8.2	8.1	8.3
HCM LOS	A	A	A





Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	98%	0%	0%
Vol Thru, %	0%	100%	0%	100%	85%
Vol Right, %	0%	0%	2%	0%	15%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	63	51	135	80
LT Vol	1	0	50	0	0
Through Vol	0	63	0	135	68
RT Vol	0	0	1	0	12
Lane Flow Rate	1	68	55	147	87
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.092	0.074	0.191	0.11
Departure Headway (Hd)	5.363	4.861	4.812	4.667	4.561
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	671	741	748	762	778
Service Time	3.069	2.567	2.815	2.436	2.331
HCM Lane V/C Ratio	0.001	0.092	0.074	0.193	0.112
HCM Control Delay	8.1	8.1	8.2	8.6	7.9
HCM Lane LOS	A	A	A	A	A
HCM 95th-tile Q	0	0.3	0.2	0.7	0.4

Existing + Project PM
1: Cactus Road & Airway Road

04/08/2020

Intersection

Int Delay, s/veh 5.1

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	134	24	1	121	22	2
Future Vol, veh/h	134	24	1	121	22	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	50	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	57	57	60	60
Heavy Vehicles, %	10	10	10	10	10	10
Mvmt Flow	158	28	2	212	37	3

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	185	108	0	0	214	0
Stage 1	108	-	-	-	-	-
Stage 2	77	-	-	-	-	-
Critical Hdwy	6.5	6.3	-	-	4.2	-
Critical Hdwy Stg 1	5.5	-	-	-	-	-
Critical Hdwy Stg 2	5.5	-	-	-	-	-
Follow-up Hdwy	3.59	3.39	-	-	2.29	-
Pot Cap-1 Maneuver	786	925	-	-	1310	-
Stage 1	897	-	-	-	-	-
Stage 2	926	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	764	925	-	-	1310	-
Mov Cap-2 Maneuver	764	-	-	-	-	-
Stage 1	897	-	-	-	-	-
Stage 2	900	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	10.6	0	7.2
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBRWBLn1WBLn2	SBL	SBT
Capacity (veh/h)	-	- 764 925 1310	-	-
HCM Lane V/C Ratio	-	- 0.206 0.031 0.028	-	-
HCM Control Delay (s)	-	- 10.9 9 7.8	0	
HCM Lane LOS	-	- B A A	A	
HCM 95th %tile Q(veh)	-	- 0.8 0.1 0.1	-	

Existing + Project PM
2: Cactus Road & Siempre Viva Road

04/08/2020

Intersection

Intersection Delay, s/veh	8.4
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	1	39	0	7	1	80	119	5	58	1
Future Vol, veh/h	0	0	1	39	0	7	1	80	119	5	58	1
Peak Hour Factor	0.25	0.25	0.25	0.60	0.60	0.60	0.85	0.85	0.85	0.68	0.68	0.68
Heavy Vehicles, %	10	10	10	10	10	10	10	10	10	10	10	10
Mvmt Flow	0	0	4	65	0	12	1	94	140	7	85	1
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	7.3	8.4	8.5	8.1
HCM LOS	A	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	1%	0%	85%	8%
Vol Thru, %	40%	0%	0%	91%
Vol Right, %	59%	100%	15%	2%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	200	1	46	64
LT Vol	1	0	39	5
Through Vol	80	0	0	58
RT Vol	119	1	7	1
Lane Flow Rate	235	4	77	94
Geometry Grp	1	1	1	1
Degree of Util (X)	0.263	0.005	0.104	0.118
Departure Headway (Hd)	4.031	4.278	4.864	4.508
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	896	837	739	797
Service Time	2.031	2.299	2.88	2.522
HCM Lane V/C Ratio	0.262	0.005	0.104	0.118
HCM Control Delay	8.5	7.3	8.4	8.1
HCM Lane LOS	A	A	A	A
HCM 95th-tile Q	1.1	0	0.3	0.4






Existing + Project PM
3: Cactus Road & Street C

04/08/2020

Intersection

Intersection Delay, s/veh 9.4


Intersection LOS A

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	21	1	1	273	170	49
Future Vol, veh/h	21	1	1	273	170	49
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	23	1	1	297	185	53
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	8.5	10.5	8.2
HCM LOS	A	B	A

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	95%	0%	0%
Vol Thru, %	0%	100%	0%	100%	54%
Vol Right, %	0%	0%	5%	0%	46%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	273	22	113	106
LT Vol	1	0	21	0	0
Through Vol	0	273	0	113	57
RT Vol	0	0	1	0	49
Lane Flow Rate	1	297	24	123	115
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.387	0.035	0.161	0.14
Departure Headway (Hd)	5.198	4.697	5.304	4.719	4.393
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	681	757	679	749	803
Service Time	2.984	2.483	3.304	2.518	2.192
HCM Lane V/C Ratio	0.001	0.392	0.035	0.164	0.143
HCM Control Delay	8	10.5	8.5	8.4	7.9
HCM Lane LOS	A	B	A	A	A
HCM 95th-tile Q	0	1.8	0.1	0.6	0.5

Attachment 5 – Cumulative Projects Information

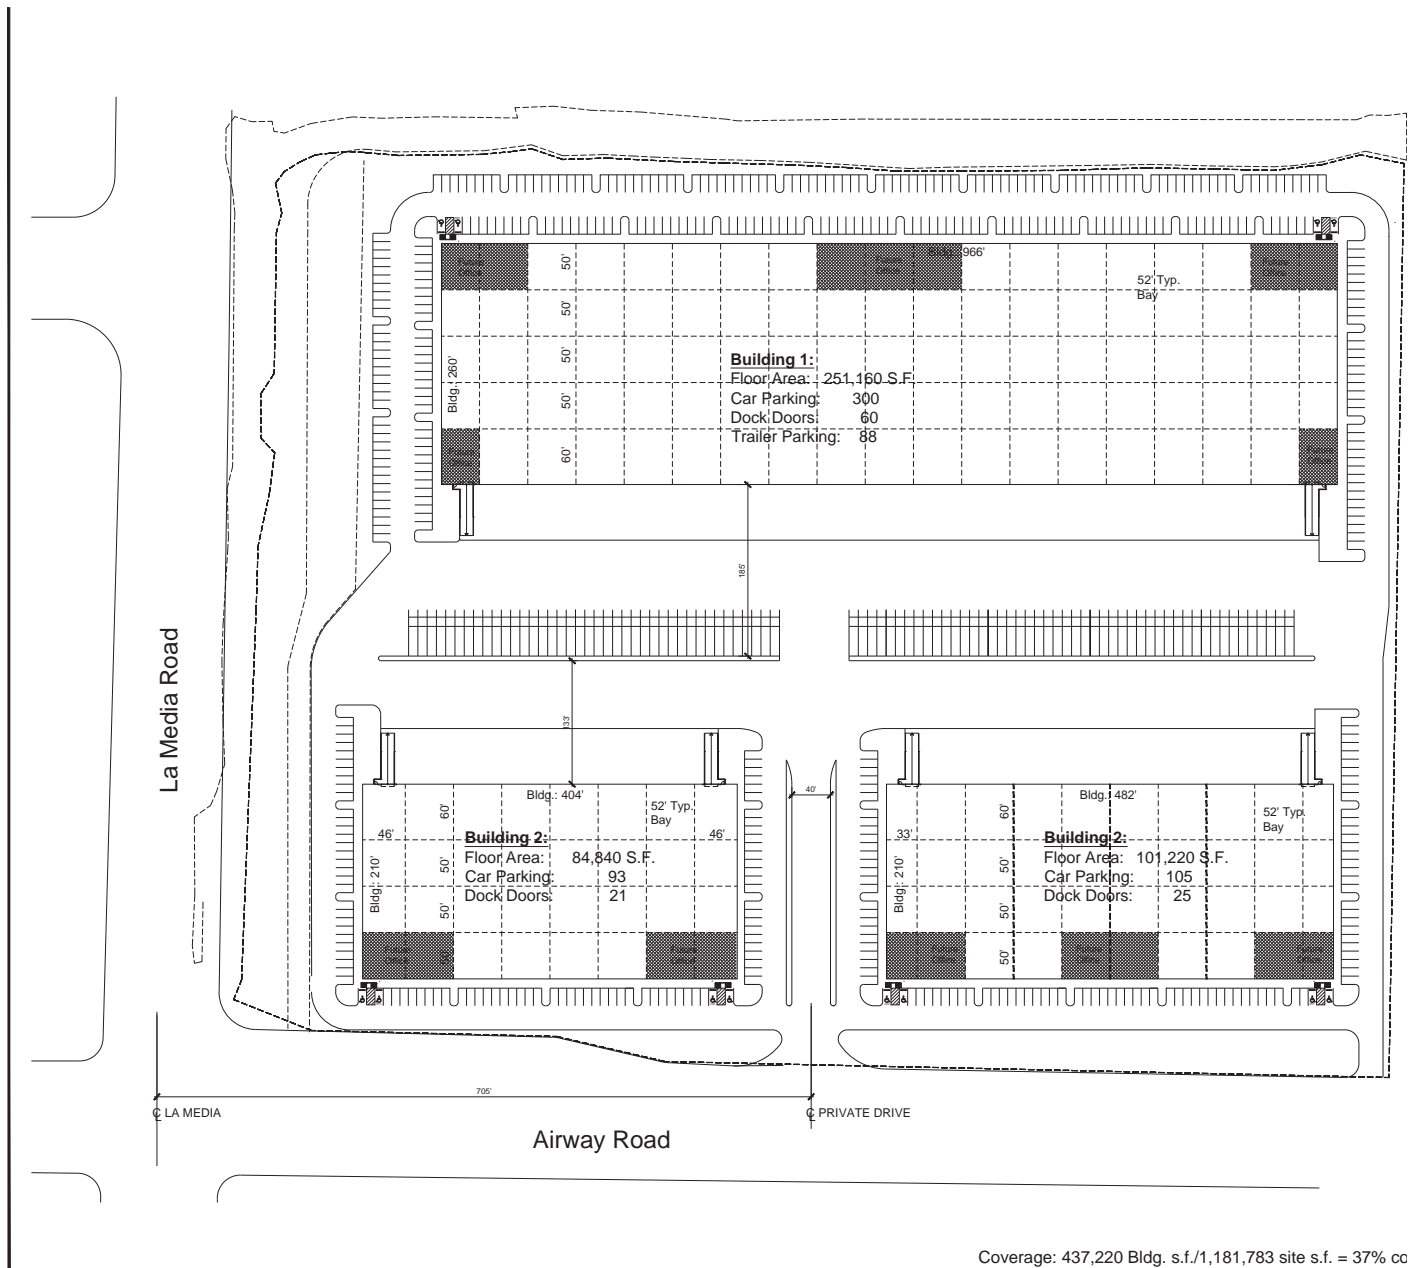

Coverage: 437,220 Bldg. s.f./1,181,783 site s.f. = 37% cc



Table 3 Trip Generation Summary

					AM Peak Hour					PM Peak Hour				
Description	Land Use	Units ¹	Trip Rate ²	Daily Trips	% of ADT ²	In:Out Ratio ²	In	Out	Total	% of ADT ²	In:Out Ratio ²	In	Out	Total
Driveway Trips ³														
Proposed														
Building 1	Warehousing	251.16 ksf	5 / ksf	1,256	15%	7.00 : 3.00	132	56	188	16%	4.00 : 6.00	80	121	201
Building 2	Warehousing	84.84 ksf	5 / ksf	424	15%	7.00 : 3.00	45	19	64	16%	4.00 : 6.00	27	41	68
Building 3	Warehousing	101.22 ksf	5 / ksf	506	15%	7.00 : 3.00	53	23	76	16%	4.00 : 6.00	32	49	81
Proposed Total				2,186			230	98	328			139	211	350

Note:

1. ksf = Thousand Square Feet
2. Daily and peak-hour trip generation rates referenced from the City of San Diego Land Development Code - Trip Generation Manual, May 2003.
3. Driveway trips are the total number of trips generated by a site.

K:\SND_LDEV\195208002 - Majestic Airway\TrafficSensitivity Analysis\ANALYSIS\EXCEL\1095208002_TG01.xlsm\Summary



1	
<div> <div>65%</div> <div>La Media Rd</div> </div>	<div> <div>↗ (65%)</div> <div>↘ (6%)</div> <div>Airway Rd</div> </div>

Jonathan Sanchez

From: Justin Rasas <justin@losengineering.com>
Sent: Monday, April 06, 2020 3:28 PM
To: Jonathan Sanchez
Cc: Monique Chen; Brooke Peterson
Subject: Re: Southwest Village Project Information

Hi Johnathan,

Thanks for asking – my family and I are doing well, staying home, and hopefully staying safe. I hope you and yours are safe as well.

The Southwest Village traffic analysis is still in flux. Sorry I don't have any project volumes to share. I also don't have a timeline of when the project will settle down. I can share the project description that was recently published (2/26/20) as part of the NOP.

The Southwest Village Specific Plan (Specific Plan) provides a comprehensive policy framework intended to guide future development in Southwest Village, consistent with the Otay Mesa Community Plan (OMCP) and City of Villages Strategy. The Specific Plan encompasses approximately 490 acres, will allow up to 5,130 attached and detached residences, and will facilitate creation of a new village anchored by up to 175,000 square feet of commercial and retail uses in a mixed-use Village Core. The Specific Plan would include dedication a new elementary school site, developed parks, trails, natural open space, and habitat conservation. Access to the Specific Plan area will be from Caliente Avenue to the north and from an extension of Beyer Boulevard, connecting the Specific Plan area to San Ysidro. Additionally, a Vesting Tentative Map (VTM), Site Development Permit, and Multi- Habitat Planning Area (MHPA) Boundary Line Adjustment is requested in order to develop approximately 74 acres within Planning Areas 8 through 14 to implement approximately 830 residential units within the Specific Plan. Concurrent with implementation of the VTM, Beyer Boulevard will be graded to its full width and improved as a two-lane road with bicycle facilities. The site is not included on any Government Code listing of hazardous waste sites.

Thanks,
Justin Rasas, P.E. (RCE 60690), PTOE
Principal

LOS Engineering, Inc.
11622 El Camino Real, Suite 100
San Diego, CA 92130
619.890.1253 Phone
Justin@LOSEngineering.com
www.LOSEngineering.com

From: Jonathan Sanchez <jsanchez@chenryanmobility.com>
Sent: Monday, April 6, 2020 1:10 PM
To: Justin Rasas <justin@losengineering.com>

Cc: Monique Chen <mchen@chenryanmobility.com>

Subject: Southwest Village Project Information

Hi Justin,

First and foremost, I hope you and your family are doing great and staying healthy 😊🖤 these crazy times we are living.

I wanted to reach out to see if you could help me out with some information regarding a project you are working on – Southwest Village in Otay Mesa. This project was identified as a cumulative project for a TIS I am currently preparing (Lumina II) and wanted to check in with you regarding the following information:

- Project Description
- Trip Generation
- Trip Distribution
- Trip Assignment

Do you think you could provide us with that information? Let me know if you have any questions.

Thanks!!

Jonathan Sanchez

Chen Ryan Associates

3900 Fifth Avenue, Suite 310 | San Diego, CA 92103

(619) 468-2739

www.ChenRyanMobility.com

3.2 Project Trip Generation, Distribution, and Assignment

Project Trip Generation

Project trip generation estimates were derived utilizing the trip generation rates outlined in *Table 1* of the *City of San Diego Land Development Code – Trip Generation Manual, May 2003*. **Table 3.1** displays the proposed project's trip generation.

TABLE 3.1
OTAY MESA FLORIO
PROPOSED PROJECT TRIP GENERATION

Land Use	Units	Trip Rate	ADT	AM Peak Hour					PM Peak Hour				
				%	Trips	Split	In	Out	%	Trips	Split	In	Out
Multi-Family (Over 20 DU/acre)	900 DU	6	5,400	8%	432	2:8	86	346	9%	486	7:3	340	146
Park (Developed)	3.5 Acres	50	175	4%	7	5:5	4	3	8%	14	5:5	7	7
Community Commercial ^a	10 KSF	70 ^a	700	3%	21	6:4	13	8	10%	70	5:5	35	35
Total			6,275	-	460	-	103	357	-	570	-	382	188

Source: City of San Diego Land Development Code – Trip Generation Manual, May 2003

Notes:


^a Trip generation rate used is consistent with the Otay Mesa CPU & OMCVSP. Community Commercial land use is defined in the Otay Mesa Community Plan FEIR as "provides for shopping areas with retail, service, civic, and office uses for the community at large within three to six miles" and density range of CC-2-3 with 0.3 FAR.


As shown in Table 3.1, the Proposed Project is anticipated to generate a total of 6,275 daily trips, including 460 (103-in / 357-out) AM peak hour trips and 570 (382-in / 188-out) PM peak hour trips.


Project Trip Distribution


Project trip distribution patterns were derived from the same SANDAG Select Zone Assignment that was conducted for the approved Otay Mesa Central Village Specific Plan Transportation Facilities Trigger Analysis (TFTA) and utilized for the Otay Mesa Lumina TIS, February 20, 2019. Due to the similar nature of the land uses in both the Lumina Project and this Florio Project, project trip distribution patterns were assumed to be consistent with the Otay Mesa Lumina TIS.

Trip distribution is identical under the Existing plus Project and the Near-Term Year 2023 plus Project (Opening Day) scenarios. The difference in trip distribution between Existing plus Project, Near-Term Year 2023 plus Project (Opening Day), and Buildout of Community Plan Conditions lies in trips not being assigned on Heritage Road, as the land uses in Chula Vista are not fully developed, and a higher percentage of trips using SR-905 heading west under Existing and Near-Term scenarios. Under Buildout of Community Plan Conditions, the same project trip distribution utilized for the Otay Mesa Central Village Specific Plan TFTA was employed as the model assumed buildout of the community.

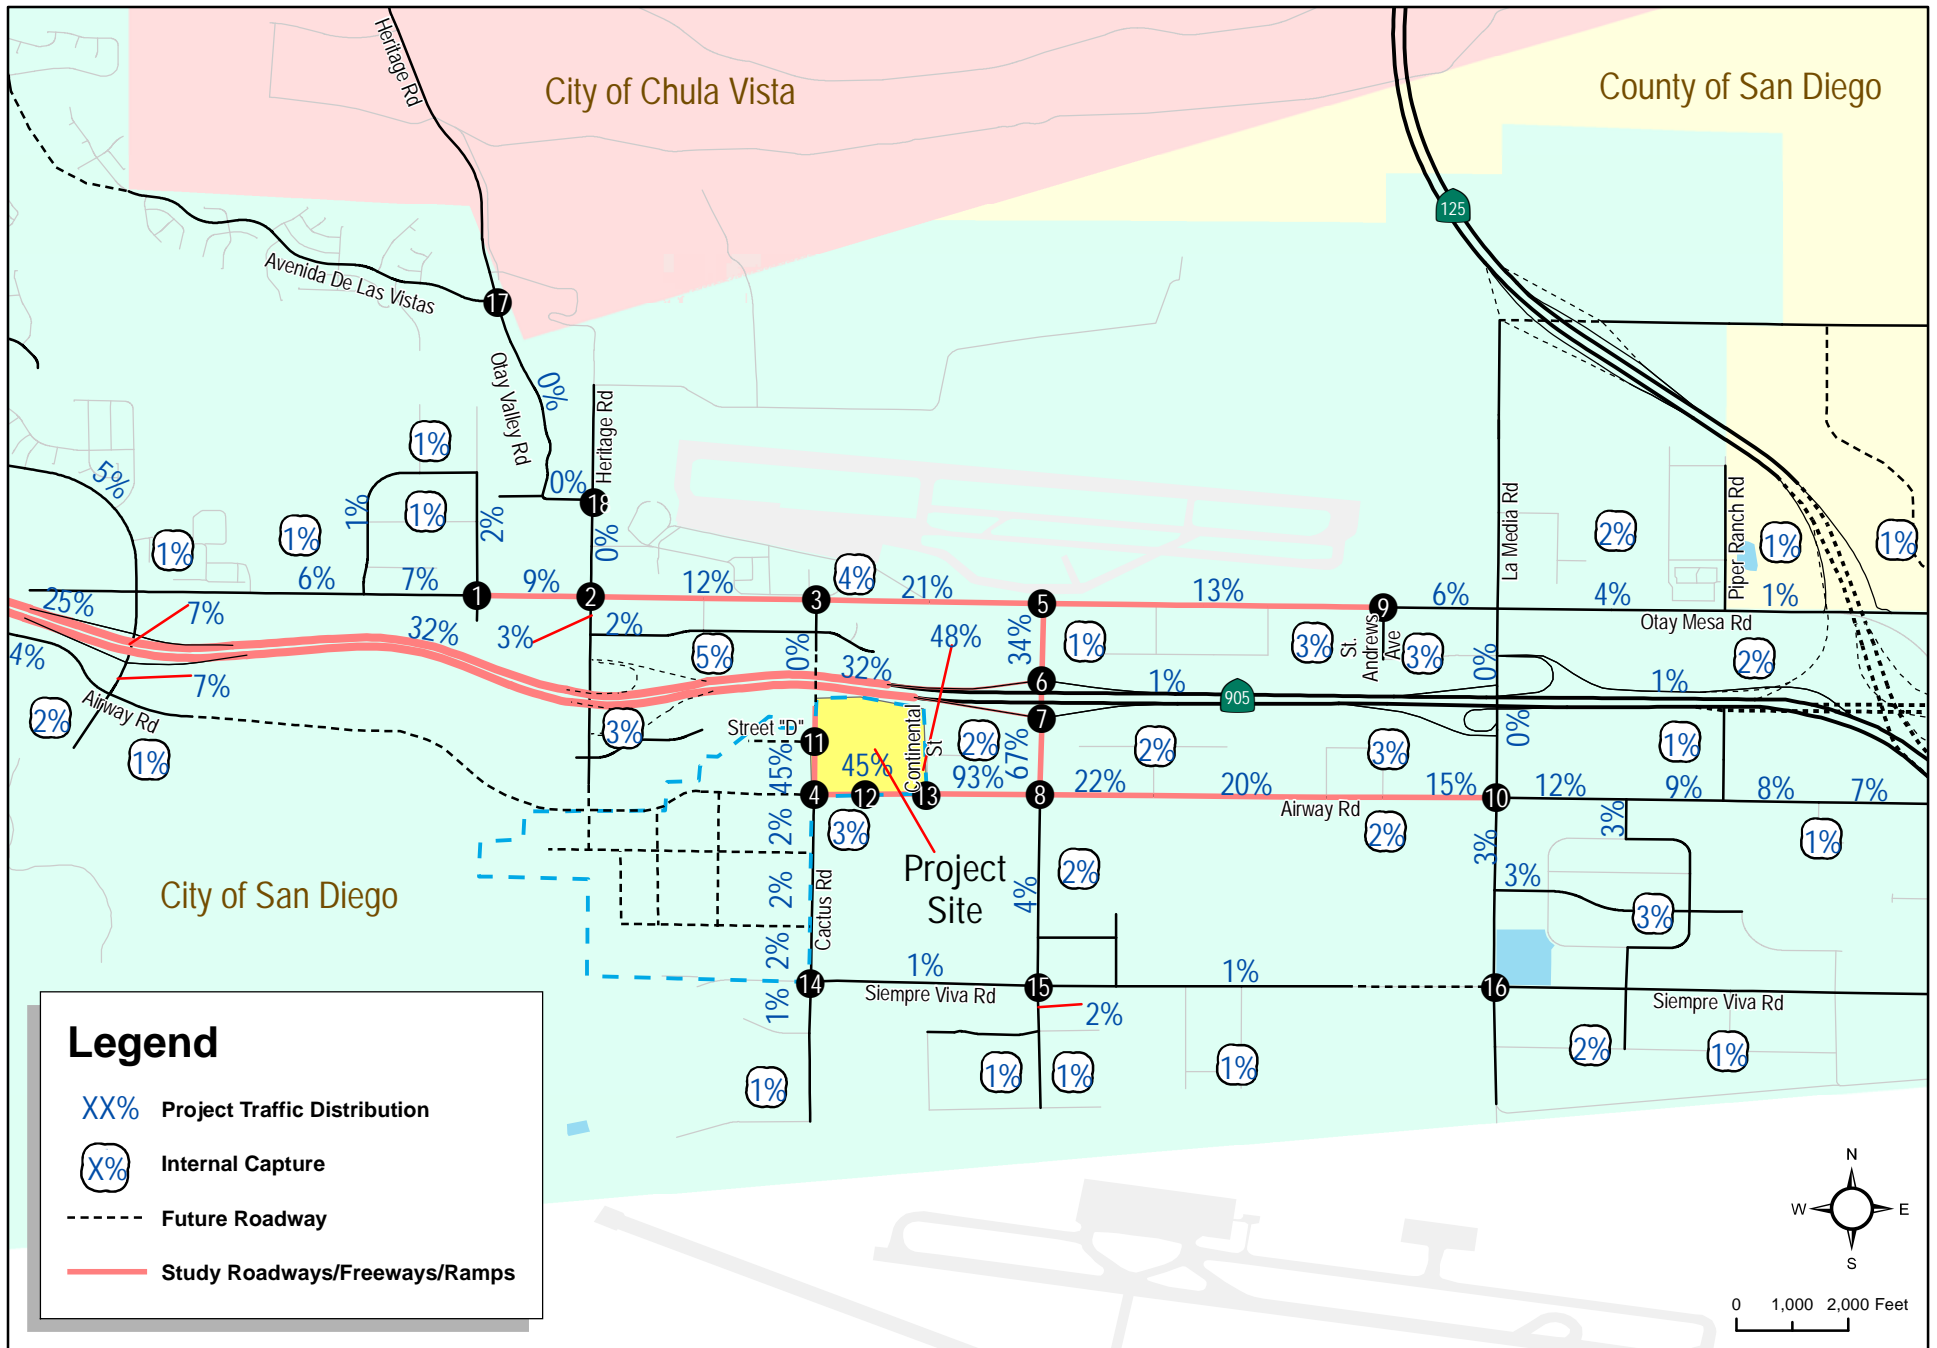

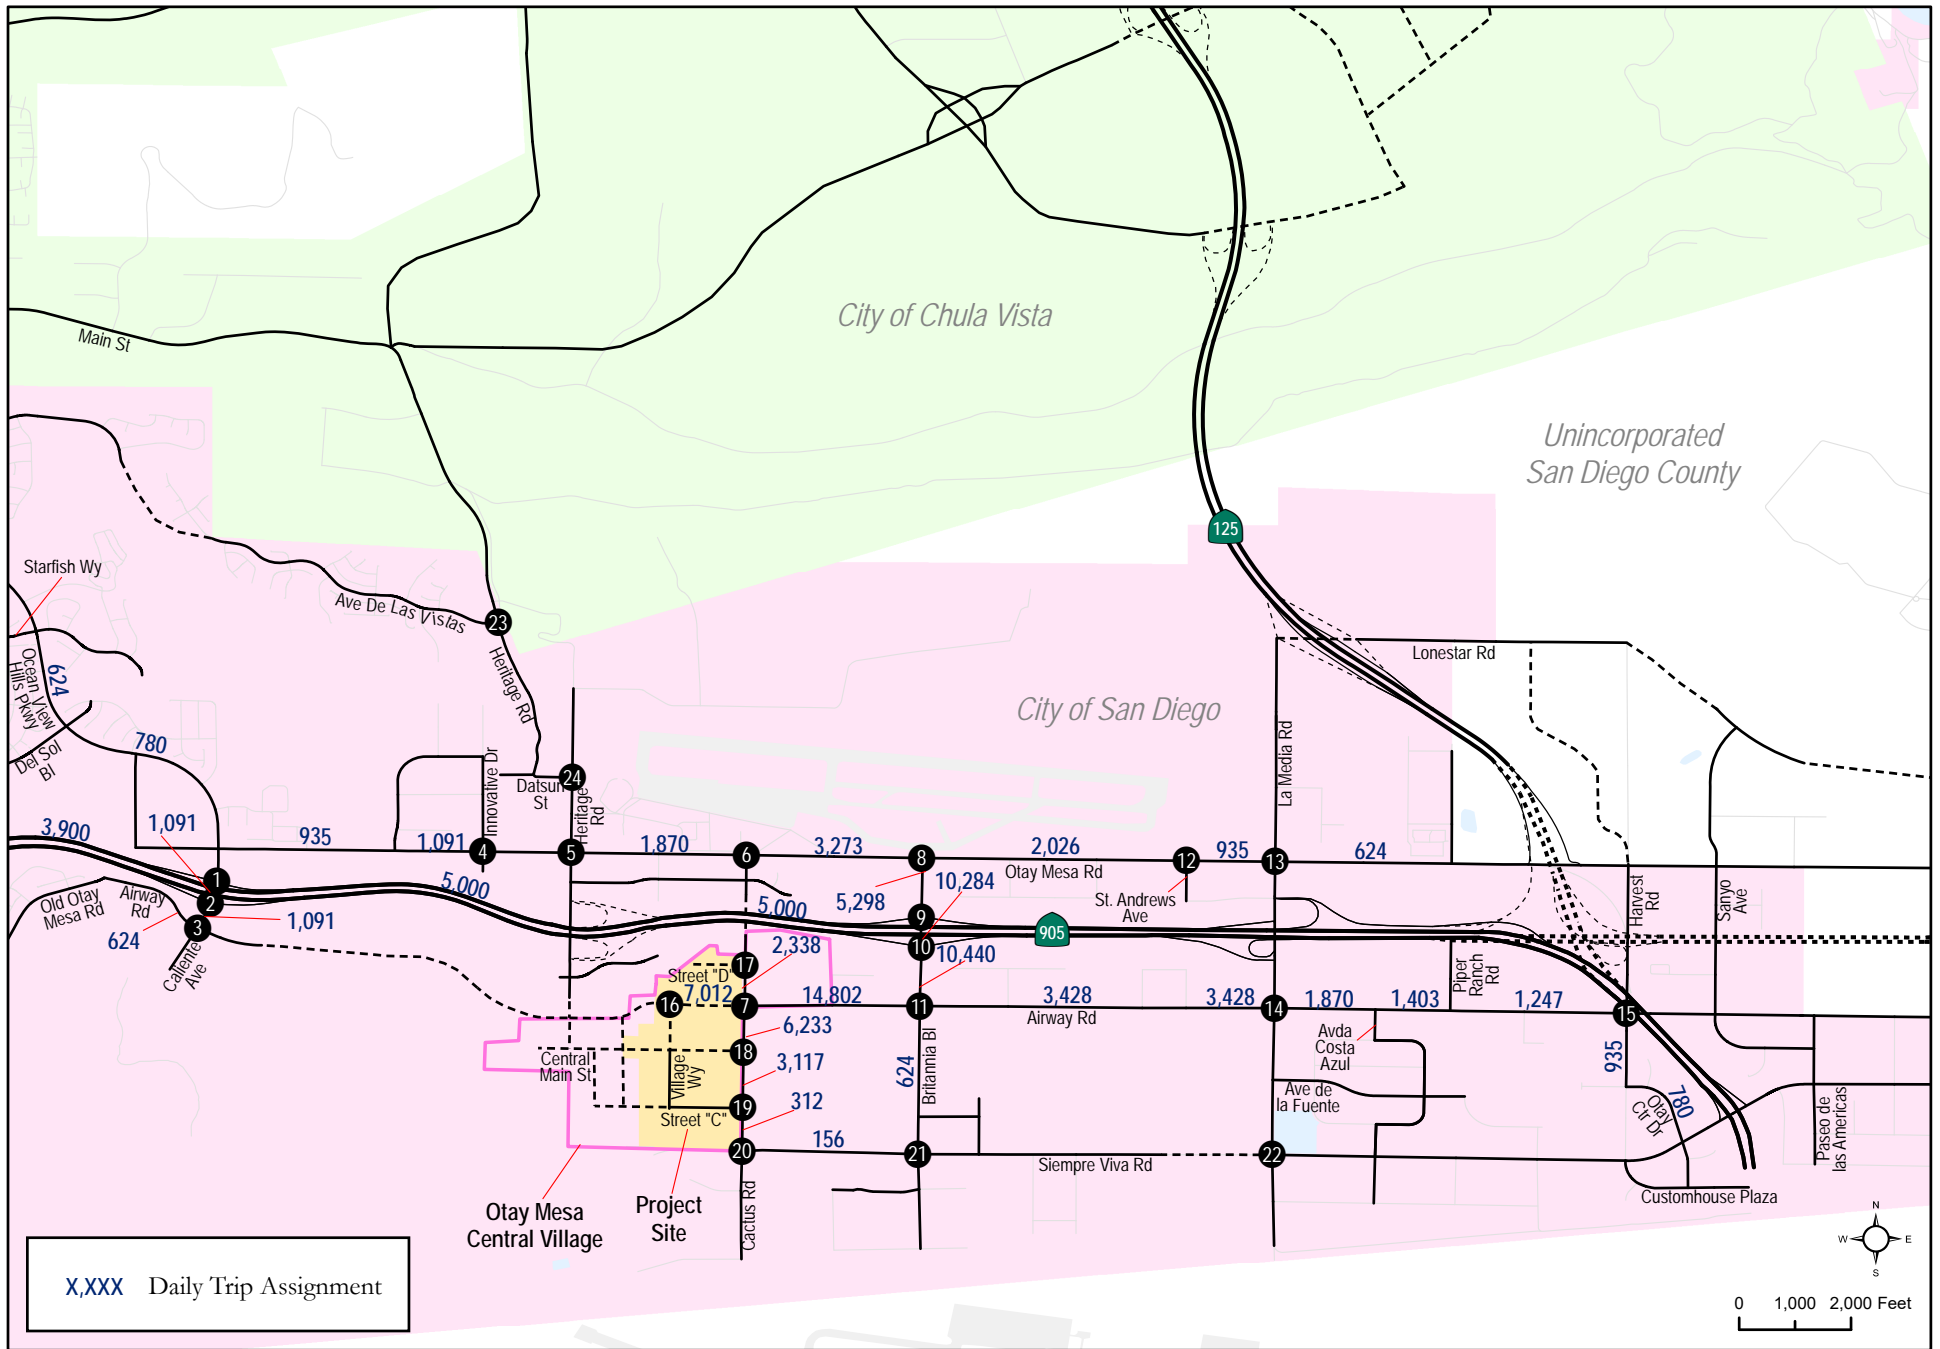

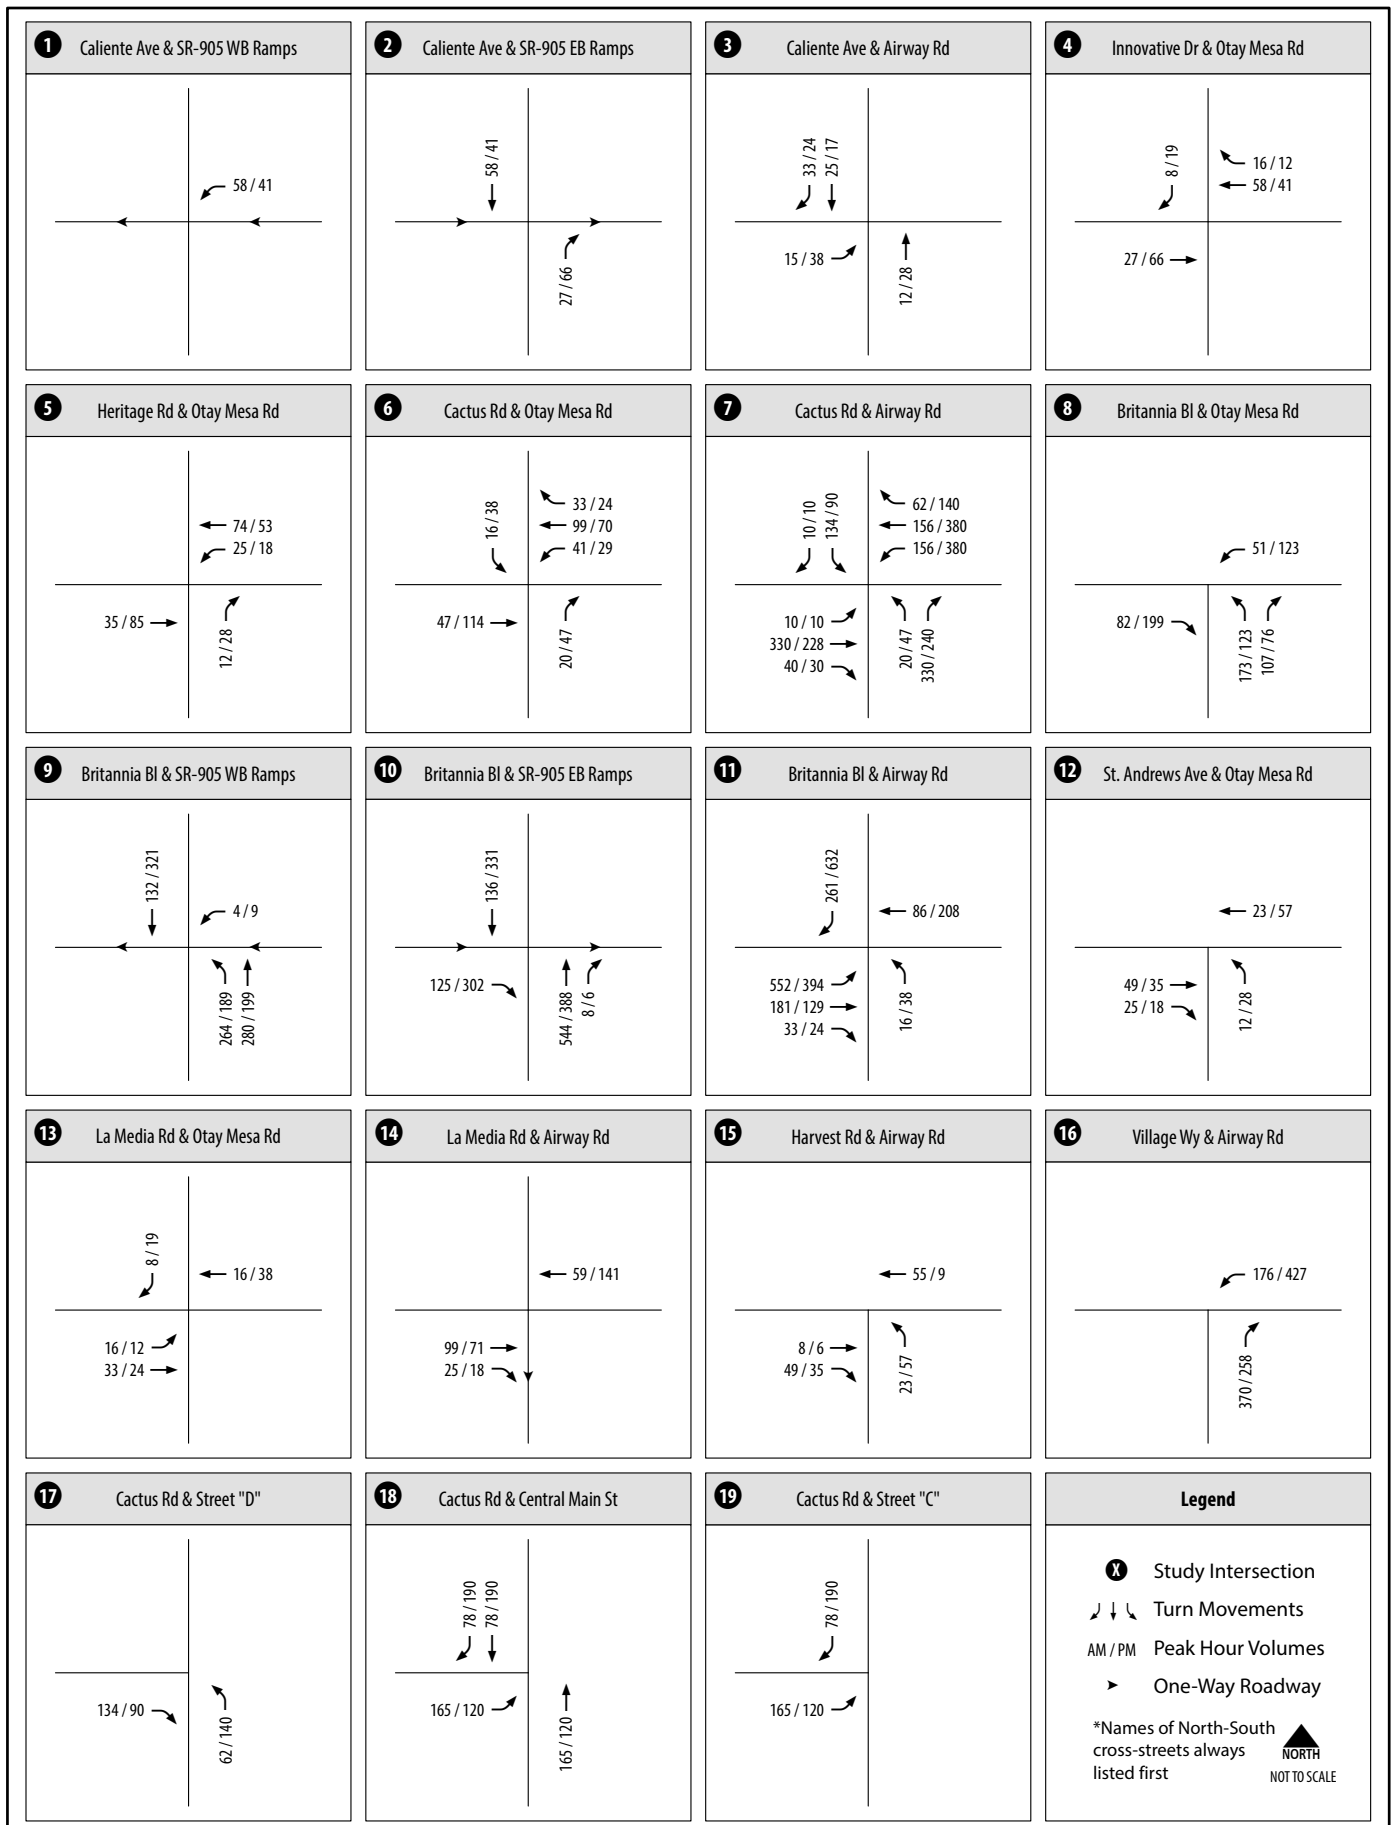

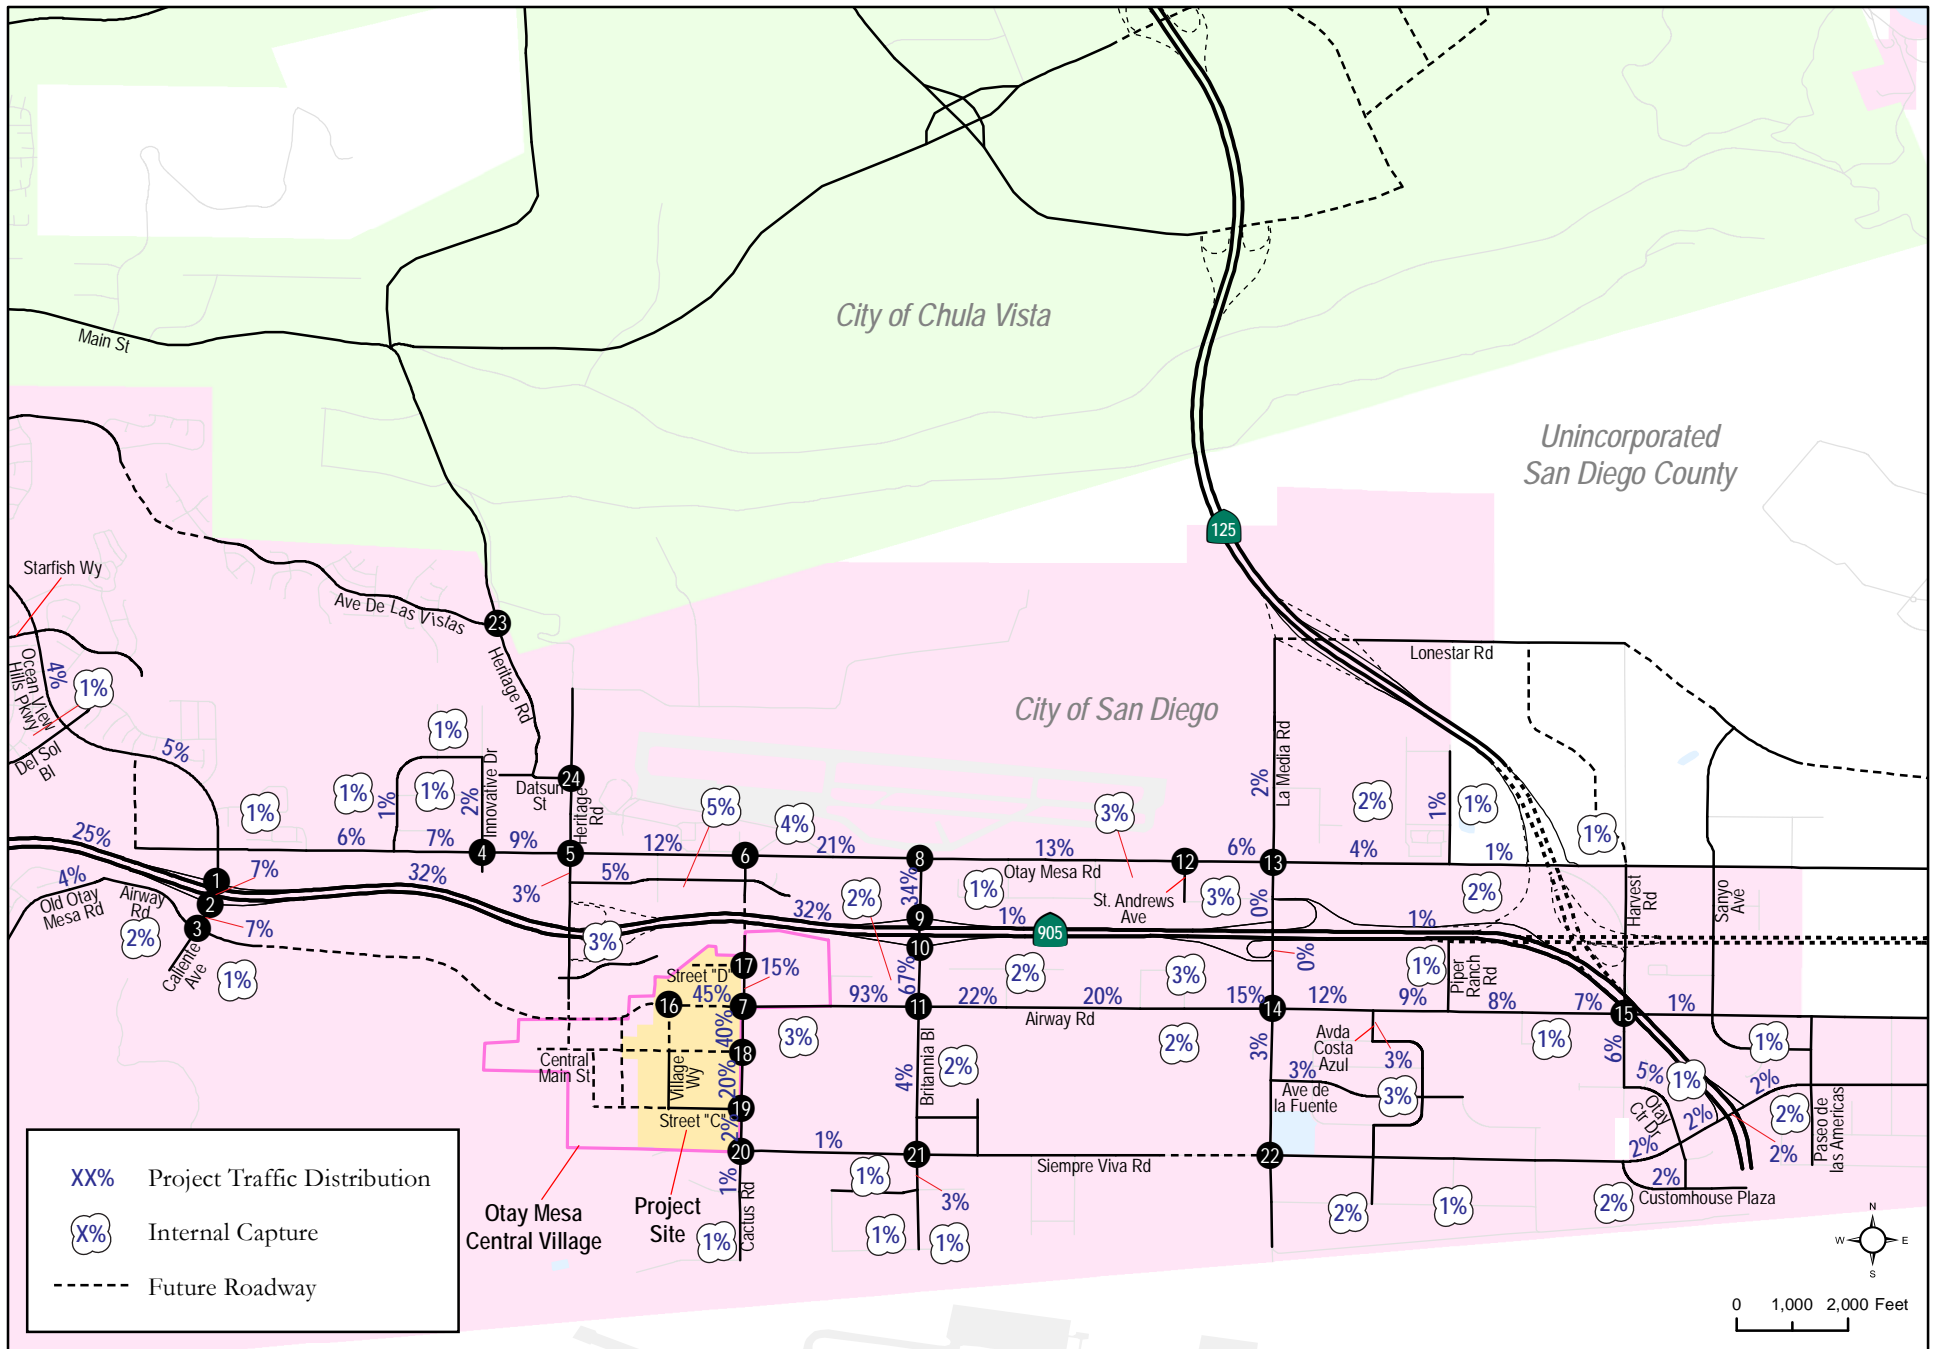





Attachment 6 – Peak Hour Intersection Calculation Worksheets – Near-Term Year 2027 Conditions

Near-Term 2027 AM
1: Cactus Road & Airway Road

10/27/2020

Intersection						
Int Delay, s/veh	76					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	274	122	51	372	151	29
Future Vol, veh/h	274	122	51	372	151	29
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	100	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	89	89	79	79	50	50
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	308	137	65	471	302	58
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	963	301	0	0	536	0
Stage 1	301	-	-	-	-	-
Stage 2	662	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	~ 284	739	-	-	1032	-
Stage 1	751	-	-	-	-	-
Stage 2	513	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	~ 198	739	-	-	1032	-
Mov Cap-2 Maneuver	~ 198	-	-	-	-	-
Stage 1	751	-	-	-	-	-
Stage 2	358	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	222.2	0		8.3		
HCM LOS	F					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	198	739	1032	-
HCM Lane V/C Ratio	-	-	1.555	0.185	0.293	-
HCM Control Delay (s)	-	-	\$ 316.3	11	9.9	0
HCM Lane LOS	-	-	F	B	A	A
HCM 95th %tile Q(veh)	-	-	19.6	0.7	1.2	-
Notes						
~: Volume exceeds capacity		\$: Delay exceeds 300s		+: Computation Not Defined		*: All major volume in platoon

Near-Term 2027 AM
2: Cactus Road & Siempre Viva Road

10/27/2020

Intersection

Intersection Delay, s/veh	8.1
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	0	73	0	2	0	23	34	42	67	0
Future Vol, veh/h	0	0	0	73	0	2	0	23	34	42	67	0
Peak Hour Factor	0.92	0.92	0.92	0.84	0.84	0.84	0.75	0.75	0.75	0.81	0.81	0.81
Heavy Vehicles, %	5	5	5	10	5	10	5	10	10	10	10	5
Mvmt Flow	0	0	0	87	0	2	0	31	45	52	83	0
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	0	8.4	7.5	8.3
HCM LOS	-	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	0%	0%	97%	39%
Vol Thru, %	40%	100%	0%	61%
Vol Right, %	60%	0%	3%	0%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	57	0	75	109
LT Vol	0	0	73	42
Through Vol	23	0	0	67
RT Vol	34	0	2	0
Lane Flow Rate	76	0	89	135
Geometry Grp	1	1	1	1
Degree of Util (X)	0.086	0	0.117	0.163
Departure Headway (Hd)	4.08	4.569	4.723	4.362
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	882	0	762	810
Service Time	2.086	2.576	2.727	2.454
HCM Lane V/C Ratio	0.086	0	0.117	0.167
HCM Control Delay	7.5	7.6	8.4	8.3
HCM Lane LOS	A	N	A	A
HCM 95th-tile Q	0.3	0	0.4	0.6





Near-Term 2027 AM
3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/veh 9.3

Intersection LOS A

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	165	0	0	69	240	78
Future Vol, veh/h	165	0	0	69	240	78
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	179	0	0	75	261	85
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	9.8	8.8	9.2
HCM LOS	A	A	A

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	0%	0%	100%	0%	0%
Vol Thru, %	100%	100%	0%	100%	51%
Vol Right, %	0%	0%	0%	0%	49%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	0	69	165	160	158
LT Vol	0	0	165	0	0
Through Vol	0	69	0	160	80
RT Vol	0	0	0	0	78
Lane Flow Rate	0	75	179	174	172
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0	0.111	0.253	0.246	0.226
Departure Headway (Hd)	5.344	5.344	5.086	5.083	4.735
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	0	669	705	706	757
Service Time	3.09	3.09	3.123	2.816	2.469
HCM Lane V/C Ratio	0	0.112	0.254	0.246	0.227
HCM Control Delay	8.1	8.8	9.8	9.5	8.9
HCM Lane LOS	N	A	A	A	A
HCM 95th-tile Q	0	0.4	1	1	0.9






Near-Term 2027 AM
4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/veh 11

Intersection LOS B

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	177	1	1	233	317	80
Future Vol, veh/h	177	1	1	233	317	80
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	192	1	1	253	345	87
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	11.3	11.9	10.4
HCM LOS	B	B	B





Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	99%	0%	0%
Vol Thru, %	0%	100%	0%	100%	57%
Vol Right, %	0%	0%	1%	0%	43%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	233	178	211	186
LT Vol	1	0	177	0	0
Through Vol	0	233	0	211	106
RT Vol	0	0	1	0	80
Lane Flow Rate	1	253	193	230	202
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.389	0.305	0.342	0.283
Departure Headway (Hd)	6.04	5.535	5.669	5.357	5.052
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	587	643	629	666	704
Service Time	3.834	3.328	3.758	3.138	2.834
HCM Lane V/C Ratio	0.002	0.393	0.307	0.345	0.287
HCM Control Delay	8.8	11.9	11.3	10.9	9.8
HCM Lane LOS	A	B	B	B	A
HCM 95th-tile Q	0	1.8	1.3	1.5	1.2

Near-Term Year 2027 PM
1: Cactus Road & Airway Road

10/27/2020

Intersection

Int Delay, s/veh 404.4

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	482	304	37	372	184	54
Future Vol, veh/h	482	304	37	372	184	54
Conflicting Peds, #/hr	1	0	0	0	1	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	100	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	57	57	60	60
Heavy Vehicles, %	10	10	10	10	10	10
Mvmt Flow	567	358	65	653	307	90

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1098	393	0	0	719	0
Stage 1	393	-	-	-	-	-
Stage 2	705	-	-	-	-	-
Critical Hdwy	6.5	6.3	-	-	4.2	-
Critical Hdwy Stg 1	5.5	-	-	-	-	-
Critical Hdwy Stg 2	5.5	-	-	-	-	-
Follow-up Hdwy	3.59	3.39	-	-	2.29	-
Pot Cap-1 Maneuver	~ 227	639	-	-	847	-
Stage 1	665	-	-	-	-	-
Stage 2	~ 476	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	~ 140	638	-	-	846	-
Mov Cap-2 Maneuver	~ 140	-	-	-	-	-
Stage 1	664	-	-	-	-	-
Stage 2	~ 294	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	887.8	0	9
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1WBLn2	SBL	SBT
Capacity (veh/h)	-	- 140 638	846	-
HCM Lane V/C Ratio	-	- 4.05 0.561	0.362	-
HCM Control Delay (s)	-	\$ 1436.7 17.6	11.7	0
HCM Lane LOS	-	- F C	B	A
HCM 95th %tile Q(veh)	-	- 57.1 3.5	1.7	-

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Near-Term Year 2027 PM
2: Cactus Road & Siempre Viva Road

10/27/2020

Intersection

Intersection Delay, s/veh	8.4
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	1	39	0	7	1	80	119	22	58	1
Future Vol, veh/h	0	0	1	39	0	7	1	80	119	22	58	1
Peak Hour Factor	0.25	0.25	0.25	0.60	0.60	0.60	0.85	0.85	0.85	0.68	0.68	0.68
Heavy Vehicles, %	5	5	5	10	5	10	5	10	10	10	10	5
Mvmt Flow	0	0	4	65	0	12	1	94	140	32	85	1
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	7.3	8.5	8.4	8.4
HCM LOS	A	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	1%	0%	85%	27%
Vol Thru, %	40%	0%	0%	72%
Vol Right, %	59%	100%	15%	1%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	200	1	46	81
LT Vol	1	0	39	22
Through Vol	80	0	0	58
RT Vol	119	1	7	1
Lane Flow Rate	235	4	77	119
Geometry Grp	1	1	1	1
Degree of Util (X)	0.259	0.005	0.105	0.15
Departure Headway (Hd)	3.965	4.243	4.912	4.547
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	908	844	731	791
Service Time	1.975	2.266	2.93	2.561
HCM Lane V/C Ratio	0.259	0.005	0.105	0.15
HCM Control Delay	8.4	7.3	8.5	8.4
HCM Lane LOS	A	A	A	A
HCM 95th-tile Q	1	0	0.4	0.5






Near-Term Year 2027 PM
3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/veh 11

Intersection LOS B

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	120	0	0	293	189	190
Future Vol, veh/h	120	0	0	293	189	190
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	130	0	0	318	205	207
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	10.4	12.7	9.8
HCM LOS	B	B	A

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	0%	0%	100%	0%	0%
Vol Thru, %	100%	100%	0%	100%	25%
Vol Right, %	0%	0%	0%	0%	75%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	0	293	120	126	253
LT Vol	0	0	120	0	0
Through Vol	0	293	0	126	63
RT Vol	0	0	0	0	190
Lane Flow Rate	0	318	130	137	275
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0	0.468	0.208	0.198	0.358
Departure Headway (Hd)	5.288	5.288	5.752	5.213	4.683
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	0	678	620	685	765
Service Time	3.05	3.05	3.832	2.97	2.439
HCM Lane V/C Ratio	0	0.469	0.21	0.2	0.359
HCM Control Delay	8.1	12.7	10.4	9.3	10.1
HCM Lane LOS	N	B	B	A	B
HCM 95th-tile Q	0	2.5	0.8	0.7	1.6






Near-Term Year 2027 PM
4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/veh15.7

Intersection LOS C

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	125	1	1	412	378	203
Future Vol, veh/h	125	1	1	412	378	203
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	136	1	1	448	411	221
Number of Lanes	1	0	1	1	2	0





Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach RightNB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	11.7	21.2	12.6
HCM LOS	B	C	B

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	99%	0%	0%
Vol Thru, %	0%	100%	0%	100%	38%
Vol Right, %	0%	0%	1%	0%	62%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	412	126	252	329
LT Vol	1	0	125	0	0
Through Vol	0	412	0	252	126
RT Vol	0	0	1	0	203
Lane Flow Rate	1	448	137	274	358
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.71	0.248	0.421	0.507
Departure Headway (Hd)	6.214	5.708	6.506	5.535	5.099
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	576	636	552	655	712
Service Time	3.946	3.44	4.545	3.235	2.799
HCM Lane V/C Ratio	0.002	0.704	0.248	0.418	0.503
HCM Control Delay	9	21.2	11.7	12.2	12.9
HCM Lane LOS	A	C	B	B	B
HCM 95th-tile Q	0	5.8	1	2.1	2.9

Attachment 7 – Peak Hour Intersection Calculation Worksheets – Near-Term Year 2027 With Project Conditions

Near-Term 2027 + Project AM
1: Cactus Road & Airway Road

10/27/2020

Intersection						
Int Delay, s/veh	92.6					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	285	122	51	421	151	29
Future Vol, veh/h	285	122	51	421	151	29
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	100	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	89	89	79	79	50	50
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	320	137	65	533	302	58
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	994	332	0	0	598	0
Stage 1	332	-	-	-	-	-
Stage 2	662	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	~ 272	710	-	-	979	-
Stage 1	727	-	-	-	-	-
Stage 2	513	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	~ 185	710	-	-	979	-
Mov Cap-2 Maneuver	~ 185	-	-	-	-	-
Stage 1	727	-	-	-	-	-
Stage 2	349	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	279.6	0		8.6		
HCM LOS	F					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	185	710	979	-
HCM Lane V/C Ratio	-	-	1.731	0.193	0.308	-
HCM Control Delay (s)	-	-	\$ 394.4	11.3	10.3	0
HCM Lane LOS	-	-	F	B	B	A
HCM 95th %tile Q(veh)	-	-	22.3	0.7	1.3	-
Notes						
~: Volume exceeds capacity		\$: Delay exceeds 300s		+: Computation Not Defined		*: All major volume in platoon

Near-Term 2027 + Project AM
2: Cactus Road & Siempre Viva Road

10/27/2020

Intersection	
Intersection Delay, s/veh	8.1
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	0	73	0	4	0	23	34	43	67	0
Future Vol, veh/h	0	0	0	73	0	4	0	23	34	43	67	0
Peak Hour Factor	0.92	0.92	0.92	0.84	0.84	0.84	0.75	0.75	0.75	0.81	0.81	0.81
Heavy Vehicles, %	5	5	5	10	5	10	5	10	10	10	10	5
Mvmt Flow	0	0	0	87	0	5	0	31	45	53	83	0
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	0	8.4	7.5	8.3
HCM LOS	-	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	0%	0%	95%	39%
Vol Thru, %	40%	100%	0%	61%
Vol Right, %	60%	0%	5%	0%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	57	0	77	110
LT Vol	0	0	73	43
Through Vol	23	0	0	67
RT Vol	34	0	4	0
Lane Flow Rate	76	0	92	136
Geometry Grp	1	1	1	1
Degree of Util (X)	0.086	0	0.12	0.165
Departure Headway (Hd)	4.088	4.576	4.707	4.367
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	881	0	765	809
Service Time	2.094	2.582	2.71	2.462
HCM Lane V/C Ratio	0.086	0	0.12	0.168
HCM Control Delay	7.5	7.6	8.4	8.3
HCM Lane LOS	A	N	A	A
HCM 95th-tile Q	0.3	0	0.4	0.6

Near-Term 2027 + Project AM






3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/veh 9.9

Intersection LOS A

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	215	1	1	69	240	90
Future Vol, veh/h	215	1	1	69	240	90
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	234	1	1	75	261	98
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	10.7	9	9.5
HCM LOS	B	A	A

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	100%	0%	0%
Vol Thru, %	0%	100%	0%	100%	47%
Vol Right, %	0%	0%	0%	0%	53%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	69	216	160	170
LT Vol	1	0	215	0	0
Through Vol	0	69	0	160	80
RT Vol	0	0	1	0	90
Lane Flow Rate	1	75	235	174	185
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.115	0.334	0.253	0.25
Departure Headway (Hd)	6.038	5.532	5.114	5.246	4.872
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	590	644	702	683	735
Service Time	3.803	3.297	3.16	2.993	2.619
HCM Lane V/C Ratio	0.002	0.116	0.335	0.255	0.252
HCM Control Delay	8.8	9	10.7	9.8	9.3
HCM Lane LOS	A	A	B	A	A
HCM 95th-tile Q	0	0.4	1.5	1	1






Near-Term 2027 + Project AM
4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/veh 11.9

Intersection LOS B





Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	177	1	1	283	329	80
Future Vol, veh/h	177	1	1	283	329	80
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	192	1	1	308	358	87
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	11.7	13.6	10.8
HCM LOS	B	B	B

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	99%	0%	0%
Vol Thru, %	0%	100%	0%	100%	58%
Vol Right, %	0%	0%	1%	0%	42%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	283	178	219	190
LT Vol	1	0	177	0	0
Through Vol	0	283	0	219	110
RT Vol	0	0	1	0	80
Lane Flow Rate	1	308	193	238	206
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.484	0.318	0.367	0.3
Departure Headway (Hd)	6.175	5.669	5.926	5.541	5.242
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	581	637	608	653	691
Service Time	3.898	3.392	3.956	3.241	2.942
HCM Lane V/C Ratio	0.002	0.484	0.317	0.364	0.298
HCM Control Delay	8.9	13.6	11.7	11.4	10.2
HCM Lane LOS	A	B	B	B	B
HCM 95th-tile Q	0	2.6	1.4	1.7	1.3

Near-Term Year 2027 + Project PM
1: Cactus Road & Airway Road

10/27/2020

Intersection						
Int Delay, s/veh	505.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	530	304	37	392	184	54
Future Vol, veh/h	530	304	37	392	184	54
Conflicting Peds, #/hr	1	0	0	0	1	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	100	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	57	57	60	60
Heavy Vehicles, %	10	10	10	10	10	10
Mvmt Flow	624	358	65	688	307	90
Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1115	410	0	0	754	0
Stage 1	410	-	-	-	-	-
Stage 2	705	-	-	-	-	-
Critical Hdwy	6.5	6.3	-	-	4.2	-
Critical Hdwy Stg 1	5.5	-	-	-	-	-
Critical Hdwy Stg 2	5.5	-	-	-	-	-
Follow-up Hdwy	3.59	3.39	-	-	2.29	-
Pot Cap-1 Maneuver	~ 222	625	-	-	821	-
Stage 1	653	-	-	-	-	-
Stage 2	~ 476	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	~ 134	624	-	-	820	-
Mov Cap-2 Maneuver	~ 134	-	-	-	-	-
Stage 1	652	-	-	-	-	-
Stage 2	~ 288	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	1092.9	0	9.3			
HCM LOS	F					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	134	624	820	-
HCM Lane V/C Ratio	-	-	4.653	0.573	0.374	-
HCM Control Delay (s)	-	-	\$ 1709.3	18.2	12	0
HCM Lane LOS	-	-	F	C	B	A
HCM 95th %tile Q(veh)	-	-	64.8	3.6	1.7	-
Notes						
-: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon						

Near-Term Year 2027 + Project PM
2: Cactus Road & Siempre Viva Road

10/27/2020

Intersection

Intersection Delay, s/veh	8.4
Intersection LOS	A

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	0	1	39	0	8	1	80	119	23	58	1
Future Vol, veh/h	0	0	1	39	0	8	1	80	119	23	58	1
Peak Hour Factor	0.25	0.25	0.25	0.60	0.60	0.60	0.85	0.85	0.85	0.68	0.68	0.68
Heavy Vehicles, %	5	5	5	10	5	10	5	10	10	10	10	5
Mvmt Flow	0	0	4	65	0	13	1	94	140	34	85	1
Number of Lanes	0	1	0	0	1	0	0	1	0	0	1	0

Approach	EB	WB	NB	SB
Opposing Approach	WB	EB	SB	NB
Opposing Lanes	1	1	1	1
Conflicting Approach Left	SB	NB	EB	WB
Conflicting Lanes Left	1	1	1	1
Conflicting Approach Right	NB	SB	WB	EB
Conflicting Lanes Right	1	1	1	1
HCM Control Delay	7.3	8.5	8.4	8.4
HCM LOS	A	A	A	A

Lane	NBLn1	EBLn1	WBLn1	SBLn1
Vol Left, %	1%	0%	83%	28%
Vol Thru, %	40%	0%	0%	71%
Vol Right, %	59%	100%	17%	1%
Sign Control	Stop	Stop	Stop	Stop
Traffic Vol by Lane	200	1	47	82
LT Vol	1	0	39	23
Through Vol	80	0	0	58
RT Vol	119	1	8	1
Lane Flow Rate	235	4	78	121
Geometry Grp	1	1	1	1
Degree of Util (X)	0.26	0.005	0.107	0.153
Departure Headway (Hd)	3.971	4.25	4.903	4.554
Convergence, Y/N	Yes	Yes	Yes	Yes
Cap	908	842	732	790
Service Time	1.982	2.275	2.923	2.568
HCM Lane V/C Ratio	0.259	0.005	0.107	0.153
HCM Control Delay	8.4	7.3	8.5	8.4
HCM Lane LOS	A	A	A	A
HCM 95th-tile Q	1	0	0.4	0.5

Near-Term Year 2027 + Project PM






3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/veh11.5

Intersection LOS B

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	141	1	1	293	189	239
Future Vol, veh/h	141	1	1	293	189	239
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	153	1	1	318	205	260
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach RightNB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	10.9	13.2	10.6
HCM LOS	B	B	B

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	99%	0%	0%
Vol Thru, %	0%	100%	0%	100%	21%
Vol Right, %	0%	0%	1%	0%	79%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	293	142	126	302
LT Vol	1	0	141	0	0
Through Vol	0	293	0	126	63
RT Vol	0	0	1	0	239
Lane Flow Rate	1	318	154	137	328
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.48	0.25	0.202	0.433
Departure Headway (Hd)	5.928	5.424	5.836	5.304	4.745
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	599	659	610	671	752
Service Time	3.711	3.206	3.933	3.077	2.518
HCM Lane V/C Ratio	0.002	0.483	0.252	0.204	0.436
HCM Control Delay	8.7	13.2	10.9	9.4	11.1
HCM Lane LOS	A	B	B	A	B
HCM 95th-tile Q	0	2.6	1	0.8	2.2






Near-Term Year 2027 + Project PM
4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/veh 17.3

Intersection LOS C

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	125	1	1	433	427	203
Future Vol, veh/h	125	1	1	433	427	203
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	136	1	1	471	464	221
Number of Lanes	1	0	1	1	2	0





















Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	11.9	24.4	13.5
HCM LOS	B	C	B

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	99%	0%	0%
Vol Thru, %	0%	100%	0%	100%	41%
Vol Right, %	0%	0%	1%	0%	59%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	1	433	126	285	345
LT Vol	1	0	125	0	0
Through Vol	0	433	0	285	142
RT Vol	0	0	1	0	203
Lane Flow Rate	1	471	137	309	375
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.002	0.757	0.253	0.477	0.536
Departure Headway (Hd)	6.297	5.791	6.638	5.555	5.139
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	569	626	541	650	702
Service Time	4.028	3.522	4.677	3.282	2.865
HCM Lane V/C Ratio	0.002	0.752	0.253	0.475	0.534
HCM Control Delay	9	24.4	11.9	13.3	13.7
HCM Lane LOS	A	C	B	B	B
HCM 95th-tile Q	0	6.8	1	2.6	3.2

Attachment 8 – Peak Hour Intersection Calculation Worksheets -
Buildout of Community Plan Conditions

Buildout of Community Plan AM
1: Cactus Road & Airway Road

10/27/2020

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	770	1235	1640	264	1085	1095	785	375	381	800	345	510
Future Volume (veh/h)	770	1235	1640	264	1085	1095	785	375	381	800	345	510
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	811	1300	1726	278	1142	1153	826	395	401	842	363	537
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	426	1452	676	173	1203	560	426	486	433	449	498	444
Arrive On Green	0.12	0.43	0.43	0.05	0.35	0.35	0.12	0.27	0.27	0.13	0.28	0.28
Sat Flow, veh/h	3456	3404	1585	3456	3404	1585	3456	1777	1585	3456	1777	1585
Grp Volume(v), veh/h	811	1300	1726	278	1142	1153	826	395	401	842	363	537
Grp Sat Flow(s),veh/h/ln	1728	1702	1585	1728	1702	1585	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	18.5	53.1	64.0	7.5	49.0	53.0	18.5	31.2	36.9	19.5	27.7	42.0
Cycle Q Clear(g_c), s	18.5	53.1	64.0	7.5	49.0	53.0	18.5	31.2	36.9	19.5	27.7	42.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	426	1452	676	173	1203	560	426	486	433	449	498	444
V/C Ratio(X)	1.90	0.90	2.55	1.61	0.95	2.06	1.94	0.81	0.93	1.87	0.73	1.21
Avail Cap(c_a), veh/h	426	1452	676	173	1203	560	426	486	433	449	498	444
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	65.8	39.9	43.0	71.3	47.2	48.5	65.8	50.9	53.0	65.2	48.9	54.0
Incr Delay (d2), s/veh	415.0	7.6	702.8	299.2	15.4	482.6	430.7	10.2	25.8	401.8	5.4	113.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	32.7	23.6	156.8	10.5	23.2	95.9	33.7	15.3	17.8	33.7	13.1	30.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	480.7	47.5	745.8	370.5	62.6	531.1	496.4	61.1	78.8	467.1	54.2	167.9
LnGrp LOS	F	D	F	F	E	F	F	E	E	F	D	F
Approach Vol, veh/h		3837			2573			1622			1742	
Approach Delay, s/veh		453.2			305.8			287.2			288.8	
Approach LOS		F			F			F			F	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	12.0	68.5	24.0	45.5	23.0	57.5	23.0	46.5				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	7.5	64.0	19.5	41.0	18.5	53.0	18.5	42.0				
Max Q Clear Time (g_c+l1), s	9.5	66.0	21.5	38.9	20.5	55.0	20.5	44.0				
Green Ext Time (p_c), s	0.0	0.0	0.0	1.1	0.0	0.0	0.0	0.0				
Intersection Summary												
HCM 6th Ctrl Delay			357.5									
HCM 6th LOS			F									

Buildout of Community Plan AM

2: Cactus Road & Siempre Viva Road

10/27/2020



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↰	↰	↶		↰	↶
Traffic Volume (veh/h)	310	1453	85	80	2095	340
Future Volume (veh/h)	310	1453	85	80	2095	340
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No	
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	326	1529	89	84	2205	358
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	547	441	127	108	2143	2557
Arrive On Green	0.17	0.17	0.07	0.07	0.66	0.77
Sat Flow, veh/h	3237	2613	1792	1450	3237	3416
Grp Volume(v), veh/h	326	1529	87	86	2205	358
Grp Sat Flow(s), veh/h/ln	1618	1306	1664	1491	1618	1664
Q Serve(g_s), s	13.3	24.1	7.3	8.1	94.5	4.0
Cycle Q Clear(g_c), s	13.3	24.1	7.3	8.1	94.5	4.0
Prop In Lane	1.00	1.00		0.97	1.00	
Lane Grp Cap(c), veh/h	547	441	124	111	2143	2557
V/C Ratio(X)	0.60	3.47	0.70	0.78	1.03	0.14
Avail Cap(c_a), veh/h	547	441	209	187	2143	2726
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	54.8	59.3	64.5	64.9	24.1	4.3
Incr Delay (d2), s/veh	1.8	115.3	6.9	11.0	27.3	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	15.6	76.3	3.3	3.4	41.5	1.3
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	56.6	1174.6	71.4	75.9	51.4	4.3
LnGrp LOS	E	F	E	E	F	A
Approach Vol, veh/h	1855		173		2563	
Approach Delay, s/veh	978.1		73.7		44.8	
Approach LOS	F		E		D	
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	99.0	15.1			114.1	28.6
Change Period (Y+Rc), s	4.5	4.5			4.5	4.5
Max Green Setting (Gmax), s	94.5	17.9			116.9	24.1
Max Q Clear Time (g_c+Y), s	94.5	10.1			6.0	26.1
Green Ext Time (p_c), s	0.0	0.5			2.7	0.0
Intersection Summary						
HCM 6th Ctrl Delay			423.0			
HCM 6th LOS			F			

Buildout of Community Plan AM






3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/veh 578.8

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	121	3	8	1320	2260	67
Future Vol, veh/h	121	3	8	1320	2260	67
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	127	3	8	1389	2379	71
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	15.3	725.5	525.1
HCM LOS	C	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	98%	0%	0%
Vol Thru, %	0%	100%	0%	100%	92%
Vol Right, %	0%	0%	2%	0%	8%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	8	1320	124	1507	820
LT Vol	8	0	121	0	0
Through Vol	0	1320	0	1507	753
RT Vol	0	0	3	0	67
Lane Flow Rate	8	1389	131	1586	864
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.017	2.566	0.261	2.521	1.359
Departure Headway (Hd)	9.104	8.6	9.14	6.923	6.865
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	396	445	395	539	535
Service Time	6.804	6.3	7.14	4.623	4.565
HCM Lane V/C Ratio	0.02	3.121	0.332	2.942	1.615
HCM Control Delay	12	729.8	15.3	705.4	193.9
HCM Lane LOS	B	F	C	F	F
HCM 95th-tile Q	0.1	86.6	1	103.6	31.9

Buildout of Community Plan AM






4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/veh 679.1

Intersection LOS F
































Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	165	155	65	1376	2174	78
Future Vol, veh/h	165	155	65	1376	2174	78
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	174	163	68	1448	2288	82
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	26	849.2	663
HCM LOS	D	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	52%	0%	0%
Vol Thru, %	0%	100%	0%	100%	90%
Vol Right, %	0%	0%	48%	0%	10%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	65	1376	320	1449	803
LT Vol	65	0	165	0	0
Through Vol	0	1376	0	1449	725
RT Vol	0	0	155	0	78
Lane Flow Rate	68	1448	337	1526	845
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.148	2.923	0.64	2.875	1.576
Departure Headway (Hd)	8.778	8.271	8.739	8.71	8.638
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	411	463	418	442	431
Service Time	6.478	5.971	6.739	6.41	6.338
HCM Lane V/C Ratio	0.165	3.127	0.806	3.452	1.961
HCM Control Delay	13	888.7	26	868.3	292.3
HCM Lane LOS	B	F	D	F	F
HCM 95th-tile Q	0.5	109	4.3	101.3	36.7

Buildout of Community PM
1: Cactus Road & Airway Road

10/27/2020

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	 	  		 	  		 	 		 	  	
Traffic Volume (veh/h)	510	1125	475	457	1835	550	1560	350	731	690	765	750
Future Volume (veh/h)	510	1125	475	457	1835	550	1560	350	731	690	765	750
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	537	1184	500	481	1932	579	1642	368	769	726	805	789
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	219	1139	480	219	1276	364	611	729	650	288	563	502
Arrive On Green	0.06	0.32	0.32	0.06	0.32	0.32	0.18	0.41	0.41	0.08	0.32	0.32
Sat Flow, veh/h	3456	3524	1483	3456	3946	1125	3456	1777	1585	3456	1777	1585
Grp Volume(v), veh/h	537	1144	540	481	1653	858	1642	368	769	726	805	789
Grp Sat Flow(s),veh/h/ln	1728	1702	1603	1728	1702	1668	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	9.5	48.5	48.5	9.5	48.5	48.5	26.5	23.1	61.5	12.5	47.5	47.5
Cycle Q Clear(g_c), s	9.5	48.5	48.5	9.5	48.5	48.5	26.5	23.1	61.5	12.5	47.5	47.5
Prop In Lane	1.00		0.93	1.00		0.67	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	219	1101	518	219	1101	539	611	729	650	288	563	502
V/C Ratio(X)	2.45	1.04	1.04	2.20	1.50	1.59	2.69	0.51	1.18	2.52	1.43	1.57
Avail Cap(c_a), veh/h	219	1101	518	219	1101	539	611	729	650	288	563	502
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	70.3	50.8	50.8	70.3	50.8	50.8	61.8	32.9	44.3	68.8	51.2	51.3
Incr Delay (d2), s/veh	667.7	37.8	51.0	553.7	230.6	274.8	765.0	0.6	97.6	694.7	203.9	266.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	24.5	26.4	26.7	21.0	55.8	61.3	76.5	10.2	41.5	33.3	52.9	56.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	738.0	88.5	101.8	623.9	281.3	325.5	826.7	33.5	141.9	763.4	255.2	318.1
LnGrp LOS	F	F	F	F	F	F	F	C	F	F	F	F
Approach Vol, veh/h		2221			2992			2779			2320	
Approach Delay, s/veh		248.8			349.1			532.2			435.6	
Approach LOS		F			F			F			F	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	14.0	53.0	17.0	66.0	14.0	53.0	31.0	52.0				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	9.5	48.5	12.5	61.5	9.5	48.5	26.5	47.5				
Max Q Clear Time (g_c+l1), s	11.5	50.5	14.5	63.5	11.5	50.5	28.5	49.5				
Green Ext Time (p_c), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Intersection Summary												
HCM 6th Ctrl Delay			396.3									
HCM 6th LOS			F									

Buildout of Community PM

2: Cactus Road & Siempre Viva Road

10/27/2020



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↰↱	↰↱	↰↱		↰↱	↰↱
Traffic Volume (veh/h)	80	2213	345	310	1827	85
Future Volume (veh/h)	80	2213	345	310	1827	85
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No	
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	84	2329	363	326	1923	89
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	1021	824	270	239	1394	2074
Arrive On Green	0.32	0.32	0.16	0.16	0.43	0.62
Sat Flow, veh/h	3237	2613	1757	1480	3237	3416
Grp Volume(v), veh/h	84	2329	362	327	1923	89
Grp Sat Flow(s),veh/h/ln	1618	1306	1664	1485	1618	1664
Q Serve(g_s), s	2.4	41.0	21.0	21.0	56.0	1.3
Cycle Q Clear(g_c), s	2.4	41.0	21.0	21.0	56.0	1.3
Prop In Lane	1.00	1.00		1.00	1.00	
Lane Grp Cap(c), veh/h	1021	824	269	240	1394	2074
V/C Ratio(X)	0.08	2.83	1.35	1.36	1.38	0.04
Avail Cap(c_a), veh/h	1021	824	269	240	1394	2074
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	31.3	44.5	54.5	54.5	37.0	9.5
Incr Delay (d2), s/veh	0.0	825.2	178.4	188.1	175.2	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	10.9	107.6	22.1	20.4	55.6	0.5
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	31.3	869.7	232.9	242.6	212.2	9.5
LnGrp LOS	C	F	F	F	F	A
Approach Vol, veh/h	2413		689			2012
Approach Delay, s/veh	840.5		237.5			203.3
Approach LOS	F		F			F
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	60.0	25.0			85.0	45.0
Change Period (Y+Rc), s	4.0	4.0			4.0	4.0
Max Green Setting (Gmax), s	50.0	21.0			81.0	41.0
Max Q Clear Time (g_c+5.0), s	50.0	23.0			3.3	43.0
Green Ext Time (p_c), s	0.0	0.0			0.6	0.0
Intersection Summary						
HCM 6th Ctrl Delay			508.5			
HCM 6th LOS			F			

Buildout of Community PM






3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/vt 109.5

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	101	57	53	2480	1420	147
Future Vol, veh/h	101	57	53	2480	1420	147
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	106	60	56	2611	1495	155
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	19.9	1721.3	230.5
HCM LOS	C	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	64%	0%	0%
Vol Thru, %	0%	100%	0%	100%	76%
Vol Right, %	0%	0%	36%	0%	24%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	53	2480	158	947	620
LT Vol	53	0	101	0	0
Through Vol	0	2480	0	947	473
RT Vol	0	0	57	0	147
Lane Flow Rate	56	2611	166	996	653
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.112	4.863	0.318	1.646	1.048
Departure Headway (Hd)	7.938	7.43	11.581	9.028	8.854
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	454	522	313	419	418
Service Time	5.638	5.13	9.581	6.728	6.554
HCM Lane V/C Ratio	0.123	5.002	0.53	2.377	1.562
HCM Control Delay	11.61	1757.8	19.9	323.9	87.9
HCM Lane LOS	B	F	C	F	F
HCM 95th-tile Q	0.4	237.7	1.3	38.6	13.9

Buildout of Community PM





4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/vt 45.2

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	120	60	60	2521	1507	190
Future Vol, veh/h	120	60	60	2521	1507	190
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	126	63	63	2654	1586	200
Number of Lanes	1	0	1	1	2	0





















Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	21.4	1789.4	284.7
HCM LOS	C	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	67%	0%	0%
Vol Thru, %	0%	100%	0%	100%	73%
Vol Right, %	0%	0%	33%	0%	27%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	60	2521	180	1005	692
LT Vol	60	0	120	0	0
Through Vol	0	2521	0	1005	502
RT Vol	0	0	60	0	190
Lane Flow Rate	63	2654	189	1058	729
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.128	5.026	0.365	1.786	1.192
Departure Headway (Hd)	8.227	7.719	11.804	9.4	9.198
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	438	504	307	402	401
Service Time	5.927	5.419	9.804	7.1	6.898
HCM Lane V/C Ratio	0.144	5.266	0.616	2.632	1.818
HCM Control Delay	12.1	1831.7	21.4	386	137.6
HCM Lane LOS	B	F	C	F	F
HCM 95th-tile Q	0.4	238.4	1.6	43.5	18.7

Attachment 9 – Peak Hour Intersection Calculation Worksheets -
Buildout of Community Plan With Project Conditions

Buildout of Community with Project AM
1: Cactus Road & Airway Road

10/27/2020

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	770	1235	1640	275	1085	1095	785	375	425	800	345	510
Future Volume (veh/h)	770	1235	1640	275	1085	1095	785	375	425	800	345	510
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	811	1300	1726	289	1142	1153	826	395	447	842	363	537
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	426	1452	676	173	1203	560	426	486	433	449	498	444
Arrive On Green	0.12	0.43	0.43	0.05	0.35	0.35	0.12	0.27	0.27	0.13	0.28	0.28
Sat Flow, veh/h	3456	3404	1585	3456	3404	1585	3456	1777	1585	3456	1777	1585
Grp Volume(v), veh/h	811	1300	1726	289	1142	1153	826	395	447	842	363	537
Grp Sat Flow(s),veh/h/ln	1728	1702	1585	1728	1702	1585	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	18.5	53.1	64.0	7.5	49.0	53.0	18.5	31.2	41.0	19.5	27.7	42.0
Cycle Q Clear(g_c), s	18.5	53.1	64.0	7.5	49.0	53.0	18.5	31.2	41.0	19.5	27.7	42.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	426	1452	676	173	1203	560	426	486	433	449	498	444
V/C Ratio(X)	1.90	0.90	2.55	1.67	0.95	2.06	1.94	0.81	1.03	1.87	0.73	1.21
Avail Cap(c_a), veh/h	426	1452	676	173	1203	560	426	486	433	449	498	444
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	65.8	39.9	43.0	71.3	47.2	48.5	65.8	50.9	54.5	65.2	48.9	54.0
Incr Delay (d2), s/veh	415.0	7.6	702.8	326.7	15.4	482.6	430.7	10.2	51.6	401.8	5.4	113.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	32.7	23.6	156.8	11.2	23.2	95.9	33.7	15.3	22.5	33.7	13.1	30.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	480.7	47.5	745.8	397.9	62.6	531.1	496.4	61.1	106.1	467.1	54.2	167.9
LnGrp LOS	F	D	F	F	E	F	F	E	F	F	D	F
Approach Vol, veh/h		3837			2584			1668			1742	
Approach Delay, s/veh		453.2			309.2			288.7			288.8	
Approach LOS		F			F			F			F	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	12.0	68.5	24.0	45.5	23.0	57.5	23.0	46.5				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	7.5	64.0	19.5	41.0	18.5	53.0	18.5	42.0				
Max Q Clear Time (g_c+l1), s	9.5	66.0	21.5	43.0	20.5	55.0	20.5	44.0				
Green Ext Time (p_c), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Intersection Summary												
HCM 6th Ctrl Delay			358.3									
HCM 6th LOS			F									

Buildout of Community with Project AM

2: Cactus Road & Siempre Viva Road

10/27/2020



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↰↱	↰↱	↰↱		↰↱	↰↱
Traffic Volume (veh/h)	310	1455	85	80	2095	340
Future Volume (veh/h)	310	1455	85	80	2095	340
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No	
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	326	1532	89	84	2205	358
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	547	441	127	108	2143	2557
Arrive On Green	0.17	0.17	0.07	0.07	0.66	0.77
Sat Flow, veh/h	3237	2613	1792	1450	3237	3416
Grp Volume(v), veh/h	326	1532	87	86	2205	358
Grp Sat Flow(s), veh/h/ln	1618	1306	1664	1491	1618	1664
Q Serve(g_s), s	13.3	24.1	7.3	8.1	94.5	4.0
Cycle Q Clear(g_c), s	13.3	24.1	7.3	8.1	94.5	4.0
Prop In Lane	1.00	1.00		0.97	1.00	
Lane Grp Cap(c), veh/h	547	441	124	111	2143	2557
V/C Ratio(X)	0.60	3.47	0.70	0.78	1.03	0.14
Avail Cap(c_a), veh/h	547	441	209	187	2143	2726
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	54.8	59.3	64.5	64.9	24.1	4.3
Incr Delay (d2), s/veh	1.8	118.4	6.9	11.0	27.3	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	15.6	76.5	3.3	3.4	41.5	1.3
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	56.6	117.7	71.4	75.9	51.4	4.3
LnGrp LOS	E	F	E	E	F	A
Approach Vol, veh/h	1858		173		2563	
Approach Delay, s/veh	981.0		73.7		44.8	
Approach LOS	F		E		D	
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	99.0	15.1			114.1	28.6
Change Period (Y+Rc), s	4.5	4.5			4.5	4.5
Max Green Setting (Gmax), s	94.5	17.9			116.9	24.1
Max Q Clear Time (g_c+Y), s	94.5	10.1			6.0	26.1
Green Ext Time (p_c), s	0.0	0.5			2.7	0.0

Intersection Summary

HCM 6th Ctrl Delay	424.5
HCM 6th LOS	F

Notes

User approved pedestrian interval to be less than phase max green.

Buildout of Community with Project AM






3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/veh 10.6

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	165	10	10	1320	2260	78
Future Vol, veh/h	165	10	10	1320	2260	78
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	174	11	11	1389	2379	82
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	17.3	754.3	573.2
HCM LOS	C	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	94%	0%	0%
Vol Thru, %	0%	100%	0%	100%	91%
Vol Right, %	0%	0%	6%	0%	9%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	10	1320	175	1507	831
LT Vol	10	0	165	0	0
Through Vol	0	1320	0	1507	753
RT Vol	0	0	10	0	78
Lane Flow Rate	11	1389	184	1586	875
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.021	2.633	0.367	2.645	1.443
Departure Headway (Hd)	9.17	8.664	9.141	7.391	7.324
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	393	431	396	508	508
Service Time	6.87	6.364	7.141	5.091	5.024
HCM Lane V/C Ratio	0.028	3.223	0.465	3.122	1.722
HCM Control Delay	12.1	759.9	17.3	762	230.9
HCM Lane LOS	B	F	C	F	F
HCM 95th-tile Q	0.1	89.4	1.7	104.8	34.9

Buildout of Community with Project AM






4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/veh 698.9

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	165	155	65	1420	2185	78
Future Vol, veh/h	165	155	65	1420	2185	78
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	174	163	68	1495	2300	82
Number of Lanes	1	0	1	1	2	0





















Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	26.4	890.2	668.4
HCM LOS	D	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	52%	0%	0%
Vol Thru, %	0%	100%	0%	100%	90%
Vol Right, %	0%	0%	48%	0%	10%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	65	1420	320	1457	806
LT Vol	65	0	165	0	0
Through Vol	0	1420	0	1457	728
RT Vol	0	0	155	0	78
Lane Flow Rate	68	1495	337	1533	849
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.148	3.016	0.64	2.889	1.583
Departure Headway (Hd)	8.78	8.273	8.887	8.797	8.726
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	411	463	411	429	424
Service Time	6.48	5.973	6.887	6.497	6.426
HCM Lane V/C Ratio	0.165	3.229	0.82	3.573	2.002
HCM Control Delay	13	930.4	26.4	874.8	295.6
HCM Lane LOS	B	F	D	F	F
HCM 95th-tile Q	0.5	114	4.3	101	36.7

Buildout of Community with Project PM

1: Cactus Road & Airway Road

10/27/2020

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	510	1125	475	500	1835	550	1560	350	750	690	765	750
Future Volume (veh/h)	510	1125	475	500	1835	550	1560	350	750	690	765	750
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	537	1184	500	526	1932	579	1642	368	789	726	805	789
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	219	1139	480	219	1276	364	611	729	650	288	563	502
Arrive On Green	0.06	0.32	0.32	0.06	0.32	0.32	0.18	0.41	0.41	0.08	0.32	0.32
Sat Flow, veh/h	3456	3524	1483	3456	3946	1125	3456	1777	1585	3456	1777	1585
Grp Volume(v), veh/h	537	1144	540	526	1653	858	1642	368	789	726	805	789
Grp Sat Flow(s),veh/h/ln	1728	1702	1603	1728	1702	1668	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	9.5	48.5	48.5	9.5	48.5	48.5	26.5	23.1	61.5	12.5	47.5	47.5
Cycle Q Clear(g_c), s	9.5	48.5	48.5	9.5	48.5	48.5	26.5	23.1	61.5	12.5	47.5	47.5
Prop In Lane	1.00		0.93	1.00		0.67	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	219	1101	518	219	1101	539	611	729	650	288	563	502
V/C Ratio(X)	2.45	1.04	1.04	2.40	1.50	1.59	2.69	0.51	1.21	2.52	1.43	1.57
Avail Cap(c_a), veh/h	219	1101	518	219	1101	539	611	729	650	288	563	502
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	70.3	50.8	50.8	70.3	50.8	50.8	61.8	32.9	44.3	68.8	51.2	51.3
Incr Delay (d2), s/veh	667.7	37.8	51.0	645.3	230.6	274.8	765.0	0.6	110.1	694.7	203.9	266.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	24.5	26.4	26.7	23.8	55.8	61.3	76.5	10.2	43.8	33.3	52.9	56.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	738.0	88.5	101.8	715.5	281.3	325.5	826.7	33.5	154.3	763.4	255.2	318.1
LnGrp LOS	F	F	F	F	F	F	F	C	F	F	F	F
Approach Vol, veh/h	2221		3037				2799		2320			
Approach Delay, s/veh	248.8		369.0				532.9		435.6			
Approach LOS	F		F				F		F			
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	14.0	53.0	17.0	66.0	14.0	53.0	31.0	52.0				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	9.5	48.5	12.5	61.5	9.5	48.5	26.5	47.5				
Max Q Clear Time (g_c+l1), s	11.5	50.5	14.5	63.5	11.5	50.5	28.5	49.5				
Green Ext Time (p_c), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Intersection Summary												
HCM 6th Ctrl Delay	402.4											
HCM 6th LOS	F											

Buildout of Community with Project PM

2: Cactus Road & Siempre Viva Road

10/27/2020



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (veh/h)	80	2220	345	310	1830	85
Future Volume (veh/h)	80	2220	345	310	1830	85
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No	
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	84	2337	363	326	1926	89
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	1021	824	270	239	1394	2074
Arrive On Green	0.32	0.32	0.16	0.16	0.43	0.62
Sat Flow, veh/h	3237	2613	1757	1480	3237	3416
Grp Volume(v), veh/h	84	2337	362	327	1926	89
Grp Sat Flow(s), veh/h/ln	1618	1306	1664	1485	1618	1664
Q Serve(g_s), s	2.4	41.0	21.0	21.0	56.0	1.3
Cycle Q Clear(g_c), s	2.4	41.0	21.0	21.0	56.0	1.3
Prop In Lane	1.00	1.00		1.00	1.00	
Lane Grp Cap(c), veh/h	1021	824	269	240	1394	2074
V/C Ratio(X)	0.08	2.84	1.35	1.36	1.38	0.04
Avail Cap(c_a), veh/h	1021	824	269	240	1394	2074
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	31.3	44.5	54.5	54.5	37.0	9.5
Incr Delay (d2), s/veh	0.0	829.6	178.4	188.1	176.2	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.9	108.1	22.1	20.4	55.7	0.5
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	31.3	874.1	232.9	242.6	213.2	9.5
LnGrp LOS	C	F	F	F	F	A
Approach Vol, veh/h	2421		689		2015	
Approach Delay, s/veh	844.8		237.5		204.2	
Approach LOS	F		F		F	
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	60.0	25.0			85.0	45.0
Change Period (Y+Rc), s	4.0	4.0			4.0	4.0
Max Green Setting (Gmax), s	50.0	21.0			81.0	41.0
Max Q Clear Time (g_c+50.0), s	50.0	23.0			3.3	43.0
Green Ext Time (p_c), s	0.0	0.0			0.6	0.0
Intersection Summary						
HCM 6th Ctrl Delay			511.3			
HCM 6th LOS			F			

Buildout of Community with Project PM






3: Cactus Road & Street C

10/27/2020

Intersection

Intersection Delay, s/vt 20.5

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	120	60	60	2480	1420	190
Future Vol, veh/h	120	60	60	2480	1420	190
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	126	63	63	2611	1495	200
Number of Lanes	1	0	1	1	2	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	21.2	1751.1	248.6
HCM LOS	C	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	67%	0%	0%
Vol Thru, %	0%	100%	0%	100%	71%
Vol Right, %	0%	0%	33%	0%	29%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	60	2480	180	947	663
LT Vol	60	0	120	0	0
Through Vol	0	2480	0	947	473
RT Vol	0	0	60	0	190
Lane Flow Rate	63	2611	189	996	698
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.128	4.941	0.363	1.681	1.139
Departure Headway (Hd)	8.092	7.584	11.659	9.322	9.112
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	446	522	311	399	405
Service Time	5.792	5.284	9.659	7.022	6.812
HCM Lane V/C Ratio	0.141	5.002	0.608	2.496	1.723
HCM Control Delay	12	1793.2	21.2	340	118.2
HCM Lane LOS	B	F	C	F	F
HCM 95th-tile Q	0.4	237.5	1.6	39.1	16.9

Buildout of Community with Project PM






4: Cactus Road & Central Main Street

10/27/2020

Intersection

Intersection Delay, s/vt 156.5

Intersection LOS F

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	120	60	60	2540	1550	190
Future Vol, veh/h	120	60	60	2540	1550	190
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	126	63	63	2674	1632	200
Number of Lanes	1	0	1	1	2	0











Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	2	2
Conflicting Approach Left SB		EB	
Conflicting Lanes Left	2	1	0
Conflicting Approach Right NB			EB
Conflicting Lanes Right	2	0	1
HCM Control Delay	21.6	1806.5	302.7
HCM LOS	C	F	F

Lane	NBLn1	NBLn2	EBLn1	SBLn1	SBLn2
Vol Left, %	100%	0%	67%	0%	0%
Vol Thru, %	0%	100%	0%	100%	73%
Vol Right, %	0%	0%	33%	0%	27%
Sign Control	Stop	Stop	Stop	Stop	Stop
Traffic Vol by Lane	60	2540	180	1033	707
LT Vol	60	0	120	0	0
Through Vol	0	2540	0	1033	517
RT Vol	0	0	60	0	190
Lane Flow Rate	63	2674	189	1088	744
Geometry Grp	7	7	2	7	7
Degree of Util (X)	0.128	5.064	0.366	1.838	1.218
Departure Headway (Hd)	8.294	7.786	11.875	9.435	9.237
Convergence, Y/N	Yes	Yes	Yes	Yes	Yes
Cap	435	508	307	402	402
Service Time	5.994	5.486	9.875	7.135	6.937
HCM Lane V/C Ratio	0.145	5.264	0.616	2.706	1.851
HCM Control Delay	12.218	48.9	21.6	408.9	147.4
HCM Lane LOS	B	F	C	F	F
HCM 95th-tile Q	0.4	238.6	1.6	45.7	19.7

Attachment 10 – Peak Hour Intersection Calculation Worksheets – Near-Term Year 2027 With Project Conditions – Mitigation Measures

Near-Term 2027 + Project AM
1: Cactus Road & Airway Road

10/27/2020

						
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (veh/h)	285	122	51	421	151	29
Future Volume (veh/h)	285	122	51	421	151	29
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	320	137	65	533	302	58
Peak Hour Factor	0.89	0.89	0.79	0.79	0.50	0.50
Percent Heavy Veh, %	2	2	2	2	2	2
Cap, veh/h	466	415	80	653	0	850
Arrive On Green	0.26	0.26	0.45	0.45	0.00	0.45
Sat Flow, veh/h	1781	1585	175	1437	0	1870
Grp Volume(v), veh/h	320	137	0	598	0	58
Grp Sat Flow(s),veh/h/ln	1781	1585	0	1612	0	1870
Q Serve(g_s), s	5.1	2.2	0.0	10.2	0.0	0.6
Cycle Q Clear(g_c), s	5.1	2.2	0.0	10.2	0.0	0.6
Prop In Lane	1.00	1.00		0.89	0.00	
Lane Grp Cap(c), veh/h	466	415	0	733	0	850
V/C Ratio(X)	0.69	0.33	0.00	0.82	0.00	0.07
Avail Cap(c_a), veh/h	1320	1174	0	940	0	1622
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	10.5	9.5	0.0	7.5	0.0	4.9
Incr Delay (d2), s/veh	1.8	0.5	0.0	4.5	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	1.6	0.6	0.0	2.7	0.0	0.1
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	12.3	9.9	0.0	12.0	0.0	4.9
LnGrp LOS	B	A	A	B	A	A
Approach Vol, veh/h	457		598			58
Approach Delay, s/veh	11.6		12.0			4.9
Approach LOS	B		B			A
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	0.0	18.9			18.9	12.8
Change Period (Y+Rc), s	4.5	4.5			4.5	4.5
Max Green Setting (Gmax), s	4.5	18.5			27.5	23.5
Max Q Clear Time (g_c+l1), s	0.0	12.2			2.6	7.1
Green Ext Time (p_c), s	0.0	2.3			0.2	1.3
Intersection Summary						
HCM 6th Ctrl Delay			11.4			
HCM 6th LOS			B			

Near-Term Year 2027 + Project PM

1: Cactus Road & Airway Road

10/27/2020



























Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (veh/h)	530	304	37	392	184	54
Future Volume (veh/h)	530	304	37	392	184	54
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	624	358	65	688	307	90
Peak Hour Factor	0.85	0.85	0.57	0.57	0.60	0.60
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	668	594	67	707	0	901
Arrive On Green	0.40	0.40	0.51	0.51	0.00	0.51
Sat Flow, veh/h	1668	1485	130	1375	0	1752
Grp Volume(v), veh/h	624	358	0	753	0	90
Grp Sat Flow(s),veh/h/ln	1668	1485	0	1504	0	1752
Q Serve(g_s), s	37.8	20.1	0.0	51.3	0.0	2.8
Cycle Q Clear(g_c), s	37.8	20.1	0.0	51.3	0.0	2.8
Prop In Lane	1.00	1.00		0.91	0.00	
Lane Grp Cap(c), veh/h	668	594	0	774	0	901
V/C Ratio(X)	0.93	0.60	0.00	0.97	0.00	0.10
Avail Cap(c_a), veh/h	751	669	0	784	0	1055
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	30.3	25.0	0.0	24.9	0.0	13.1
Incr Delay (d2), s/veh	17.6	1.2	0.0	25.4	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	17.9	7.1	0.0	22.6	0.0	1.1
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	47.9	26.2	0.0	50.3	0.0	13.2
LnGrp LOS	D	C	A	D	A	B
Approach Vol, veh/h	982		753			90
Approach Delay, s/veh	40.0		50.3			13.2
Approach LOS	D		D			B
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	0.0	58.8			58.8	46.7
Change Period (Y+Rc), s	4.5	4.5			4.5	4.5
Max Green Setting (Gmax), s	4.0	55.0			63.5	47.5
Max Q Clear Time (g_c+l1), s	0.0	53.3			4.8	39.8
Green Ext Time (p_c), s	0.0	0.9			0.5	2.4
Intersection Summary						
HCM 6th Ctrl Delay			43.0			
HCM 6th LOS			D			

Attachment 11 – Peak Hour Intersection Calculation Worksheets –
Buildout of Community Conditions – Mitigation Measures & Fair Share
Calculations

Buildout + Project AM - Mitigation













1: Cactus Road & Airway Road

10/27/2020

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	770	1235	1640	275	1085	1095	785	375	425	800	345	510
Future Volume (veh/h)	770	1235	1640	275	1085	1095	785	375	425	800	345	510
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	811	1300	1726	289	1142	1153	826	395	447	842	363	537
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	558	1421	1205	219	1464	800	564	971	433	582	511	866
Arrive On Green	0.16	0.38	0.38	0.06	0.29	0.29	0.16	0.27	0.27	0.16	0.27	0.27
Sat Flow, veh/h	3563	3741	3170	3456	5106	2790	3456	3554	1585	3563	1870	3170
Grp Volume(v), veh/h	811	1300	1726	289	1142	1153	826	395	447	842	363	537
Grp Sat Flow(s),veh/h/ln	1781	1870	1585	1728	1702	1395	1728	1777	1585	1781	1870	1585
Q Serve(g_s), s	23.5	49.5	57.0	9.5	30.8	43.0	24.5	13.6	41.0	24.5	26.2	22.2
Cycle Q Clear(g_c), s	23.5	49.5	57.0	9.5	30.8	43.0	24.5	13.6	41.0	24.5	26.2	22.2
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	558	1421	1205	219	1464	800	564	971	433	582	511	866
V/C Ratio(X)	1.45	0.91	1.43	1.32	0.78	1.44	1.46	0.41	1.03	1.45	0.71	0.62
Avail Cap(c_a), veh/h	558	1421	1205	219	1464	800	564	971	433	582	511	866
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	63.3	44.2	46.5	70.3	49.2	53.5	62.8	44.6	54.5	62.8	49.1	47.7
Incr Delay (d2), s/veh	213.7	9.4	199.6	172.5	2.8	205.9	218.2	0.3	51.6	210.7	4.5	1.4
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	27.2	24.7	55.7	9.5	13.5	37.9	27.9	6.1	22.5	28.1	13.0	9.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	277.0	53.6	246.1	242.8	51.9	259.4	280.9	44.8	106.1	273.5	53.7	49.0
LnGrp LOS	F	D	F	F	D	F	F	D	F	F	D	D
Approach Vol, veh/h		3837			2584			1668			1742	
Approach Delay, s/veh		187.4			165.9			178.2			158.5	
Approach LOS		F			F			F			F	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	14.0	61.5	29.0	45.5	28.0	47.5	29.0	45.5				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	9.5	57.0	24.5	41.0	23.5	43.0	24.5	41.0				
Max Q Clear Time (g_c+l1), s	11.5	59.0	26.5	43.0	25.5	45.0	26.5	28.2				
Green Ext Time (p_c), s	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.8				
Intersection Summary												
HCM 6th Ctrl Delay			175.0									
HCM 6th LOS			F									
Notes												
User approved volume balancing among the lanes for turning movement.												

Buildout + Project AM - Mitigation
2: Cactus Road & Siempre Viva Road

10/27/2020

						
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (veh/h)	310	1455	85	80	2095	340
Future Volume (veh/h)	310	1455	85	80	2095	340
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	326	1532	89	84	2205	358
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	564	456	241	107	2167	2562
Arrive On Green	0.17	0.17	0.07	0.07	0.67	0.77
Sat Flow, veh/h	3237	2613	3416	1485	3237	3416
Grp Volume(v), veh/h	326	1532	89	84	2205	358
Grp Sat Flow(s),veh/h/ln	1618	1306	1664	1485	1618	1664
Q Serve(g_s), s	13.3	25.0	3.7	8.0	96.0	4.0
Cycle Q Clear(g_c), s	13.3	25.0	3.7	8.0	96.0	4.0
Prop In Lane	1.00	1.00		1.00	1.00	
Lane Grp Cap(c), veh/h	564	456	241	107	2167	2562
V/C Ratio(X)	0.58	3.36	0.37	0.78	1.02	0.14
Avail Cap(c_a), veh/h	564	456	395	176	2167	2716
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	54.3	59.2	63.4	65.4	23.7	4.3
Incr Delay (d2), s/veh	1.5	1068.6	0.9	11.7	23.8	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	5.5	75.9	1.6	3.4	40.8	1.3
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	55.8	1127.8	64.3	77.1	47.5	4.3
LnGrp LOS	E	F	E	E	F	A
Approach Vol, veh/h	1858		173			2563
Approach Delay, s/veh	939.7		70.5			41.4
Approach LOS	F		E			D
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	100.0	14.4			114.4	29.0
Change Period (Y+Rc), s	4.0	4.0			4.0	4.0
Max Green Setting (Gmax), s	96.0	17.0			117.0	25.0
Max Q Clear Time (g_c+l1), s	98.0	10.0			6.0	27.0
Green Ext Time (p_c), s	0.0	0.4			2.7	0.0
Intersection Summary						
HCM 6th Ctrl Delay			405.8			
HCM 6th LOS			F			

Buildout + Project AM - Mitigation

3: Cactus Road & Street C

10/27/2020



Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	165	10	10	1320	2260	78
Future Volume (veh/h)	165	10	10	1320	2260	78
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00			1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No	No	
Adj Sat Flow, veh/h/ln	1900	1900	1870	1870	1870	1870
Adj Flow Rate, veh/h	174	11	11	1389	2379	82
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	0	0	2	2	2	2
Cap, veh/h	206	13	19	2792	2559	88
Arrive On Green	0.12	0.12	0.01	0.79	0.73	0.73
Sat Flow, veh/h	1655	105	1781	3647	3599	120
Grp Volume(v), veh/h	186	0	11	1389	1199	1262
Grp Sat Flow(s),veh/h/ln	1769	0	1781	1777	1777	1849
Q Serve(g_s), s	10.3	0.0	0.6	13.8	56.1	58.2
Cycle Q Clear(g_c), s	10.3	0.0	0.6	13.8	56.1	58.2
Prop In Lane	0.94	0.06	1.00			0.06
Lane Grp Cap(c), veh/h	220	0	19	2792	1297	1350
V/C Ratio(X)	0.84	0.00	0.59	0.50	0.92	0.93
Avail Cap(c_a), veh/h	323	0	73	2933	1314	1367
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	42.9	0.0	49.4	3.8	11.2	11.5
Incr Delay (d2), s/veh	12.6	0.0	25.8	0.1	11.0	12.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	5.2	0.0	0.4	3.6	21.1	22.9
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	55.5	0.0	75.2	3.9	22.2	23.5
LnGrp LOS	E	A	E	A	C	C
Approach Vol, veh/h	186			1400	2461	
Approach Delay, s/veh	55.5			4.5	22.9	
Approach LOS	E			A	C	
Timer - Assigned Phs		2		4	5	6
Phs Duration (G+Y+Rc), s		83.2		17.0	5.6	77.7
Change Period (Y+Rc), s		4.5		4.5	4.5	4.5
Max Green Setting (Gmax), s		82.7		18.3	4.1	74.1
Max Q Clear Time (g_c+l1), s		15.8		12.3	2.6	60.2
Green Ext Time (p_c), s		16.7		0.2	0.0	13.0
Intersection Summary						
HCM 6th Ctrl Delay			18.0			
HCM 6th LOS			B			
Notes						
User approved volume balancing among the lanes for turning movement.						

Buildout + Project AM - Mitigation
4: Cactus Road & Central Main Street

10/27/2020

























Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	165	155	65	1420	2185	78
Future Volume (veh/h)	165	155	65	1420	2185	78
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00			1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No	No	
Adj Sat Flow, veh/h/ln	1900	1900	1870	1870	1870	1870
Adj Flow Rate, veh/h	174	163	68	1495	2300	82
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	0	0	2	2	2	2
Cap, veh/h	161	151	86	2678	2365	84
Arrive On Green	0.19	0.19	0.05	0.75	0.68	0.68
Sat Flow, veh/h	865	811	1781	3647	3594	124
Grp Volume(v), veh/h	338	0	68	1495	1160	1222
Grp Sat Flow(s),veh/h/ln	1681	0	1781	1777	1777	1848
Q Serve(g_s), s	27.9	0.0	5.7	26.8	91.5	94.8
Cycle Q Clear(g_c), s	27.9	0.0	5.7	26.8	91.5	94.8
Prop In Lane	0.51	0.48	1.00			0.07
Lane Grp Cap(c), veh/h	313	0	86	2678	1200	1248
V/C Ratio(X)	1.08	0.00	0.79	0.56	0.97	0.98
Avail Cap(c_a), veh/h	313	0	86	2683	1203	1251
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	61.0	0.0	70.6	7.8	22.7	23.3
Incr Delay (d2), s/veh	73.7	0.0	38.8	0.3	18.4	20.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	18.3	0.0	3.5	9.6	41.7	45.4
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	134.6	0.0	109.3	8.1	41.2	43.6
LnGrp LOS	F	A	F	A	D	D
Approach Vol, veh/h	338			1563	2382	
Approach Delay, s/veh	134.6			12.5	42.4	
Approach LOS	F			B	D	
Timer - Assigned Phs		2		4	5	6
Phs Duration (G+Y+Rc), s		117.4		32.4	11.7	105.7
Change Period (Y+Rc), s		4.5		4.5	4.5	4.5
Max Green Setting (Gmax), s		113.1		27.9	7.2	101.4
Max Q Clear Time (g_c+l1), s		28.8		29.9	7.7	96.8
Green Ext Time (p_c), s		19.9		0.0	0.0	4.4
Intersection Summary						
HCM 6th Ctrl Delay			38.8			
HCM 6th LOS			D			
Notes						
User approved volume balancing among the lanes for turning movement.						

Buildout + Project PM - Mitigation


















1: Cactus Road & Airway Road

10/27/2020





												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	510	1126	476	500	1837	550	1558	350	750	690	765	750
Future Volume (veh/h)	510	1126	476	500	1837	550	1558	350	750	690	765	750
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	537	1304	422	526	1934	579	1640	368	789	726	660	886
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	297	1590	449	288	1447	790	795	1457	650	368	530	898
Arrive On Green	0.08	0.28	0.28	0.08	0.28	0.28	0.23	0.41	0.41	0.10	0.28	0.28
Sat Flow, veh/h	3563	5611	1585	3456	5106	2790	3456	3554	1585	3563	1870	3170
Grp Volume(v), veh/h	537	1304	422	526	1934	579	1640	368	789	726	660	886
Grp Sat Flow(s),veh/h/ln	1781	1870	1585	1728	1702	1395	1728	1777	1585	1781	1870	1585
Q Serve(g_s), s	12.5	32.5	39.0	12.5	42.5	28.2	34.5	10.2	61.5	15.5	42.5	41.7
Cycle Q Clear(g_c), s	12.5	32.5	39.0	12.5	42.5	28.2	34.5	10.2	61.5	15.5	42.5	41.7
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	297	1590	449	288	1447	790	795	1457	650	368	530	898
V/C Ratio(X)	1.81	0.82	0.94	1.83	1.34	0.73	2.06	0.25	1.21	1.97	1.25	0.99
Avail Cap(c_a), veh/h	297	1590	449	288	1447	790	795	1457	650	368	530	898
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	68.8	50.2	52.5	68.8	53.8	48.6	57.7	29.1	44.2	67.3	53.8	53.5
Incr Delay (d2), s/veh	377.0	3.6	27.9	385.3	156.4	3.5	482.9	0.1	110.1	447.2	125.6	26.6
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	21.3	15.8	19.0	21.0	39.1	10.2	68.4	4.5	43.8	29.9	38.4	19.9
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	445.8	53.7	80.4	454.0	210.1	52.1	540.6	29.2	154.3	514.4	179.4	80.1
LnGrp LOS	F	D	F	F	F	D	F	C	F	F	F	F
Approach Vol, veh/h	2263			3039			2797			2272		
Approach Delay, s/veh	151.7			222.2			364.4			247.7		
Approach LOS	F			F			F			F		
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	17.0	47.0	20.0	66.0	17.0	47.0	39.0	47.0				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	12.5	42.5	15.5	61.5	12.5	42.5	34.5	42.5				
Max Q Clear Time (g_c+l1), s	14.5	41.0	17.5	63.5	14.5	44.5	36.5	44.5				
Green Ext Time (p_c), s	0.0	1.3	0.0	0.0	0.0	0.0	0.0	0.0				
Intersection Summary												
HCM 6th Ctrl Delay	250.8											
HCM 6th LOS	F											
Notes												

Buildout + Project PM - Mitigation
2: Cactus Road & Siempre Viva Road

10/27/2020

						
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	 	 	 		 	 
Traffic Volume (veh/h)	80	2218	344	310	1831	83
Future Volume (veh/h)	80	2218	344	310	1831	83
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00		1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No
Adj Sat Flow, veh/h/ln	1752	1752	1752	1752	1752	1752
Adj Flow Rate, veh/h	84	2335	362	326	1927	87
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	10	10	10	10	10	10
Cap, veh/h	1100	888	377	168	1510	2019
Arrive On Green	0.34	0.34	0.11	0.11	0.47	0.61
Sat Flow, veh/h	3237	2613	3416	1485	3237	3416
Grp Volume(v), veh/h	84	2335	362	326	1927	87
Grp Sat Flow(s),veh/h/ln	1618	1306	1664	1485	1618	1664
Q Serve(g_s), s	2.6	51.0	16.2	17.0	70.0	1.6
Cycle Q Clear(g_c), s	2.6	51.0	16.2	17.0	70.0	1.6
Prop In Lane	1.00	1.00		1.00	1.00	
Lane Grp Cap(c), veh/h	1100	888	377	168	1510	2019
V/C Ratio(X)	0.08	2.63	0.96	1.94	1.28	0.04
Avail Cap(c_a), veh/h	1100	888	377	168	1510	2019
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	33.5	49.5	66.2	66.5	40.0	11.9
Incr Delay (d2), s/veh	0.0	736.0	35.8	443.0	129.4	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	1.1	107.4	8.8	27.2	54.5	0.6
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	33.6	785.5	101.9	509.5	169.4	11.9
LnGrp LOS	C	F	F	F	F	B
Approach Vol, veh/h	2419		688			2014
Approach Delay, s/veh	759.4		295.0			162.6
Approach LOS	F		F			F
Timer - Assigned Phs	1	2			6	8
Phs Duration (G+Y+Rc), s	74.0	21.0			95.0	55.0
Change Period (Y+Rc), s	4.0	4.0			4.0	4.0
Max Green Setting (Gmax), s	70.0	17.0			91.0	51.0
Max Q Clear Time (g_c+l1), s	72.0	19.0			3.6	53.0
Green Ext Time (p_c), s	0.0	0.0			0.6	0.0
Intersection Summary						
HCM 6th Ctrl Delay			462.3			
HCM 6th LOS			F			



Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	120	60	60	2478	1421	190
Future Volume (veh/h)	120	60	60	2478	1421	190
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00			1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No	No	
Adj Sat Flow, veh/h/ln	1900	1900	1870	1870	1870	1870
Adj Flow Rate, veh/h	126	63	63	2608	1496	200
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	0	0	2	2	2	2
Cap, veh/h	147	74	70	2785	2211	292
Arrive On Green	0.13	0.13	0.04	0.78	0.70	0.70
Sat Flow, veh/h	1135	567	1781	3647	3249	417
Grp Volume(v), veh/h	190	0	63	2608	834	862
Grp Sat Flow(s),veh/h/ln	1711	0	1781	1777	1777	1795
Q Serve(g_s), s	11.3	0.0	3.7	61.9	27.5	28.7
Cycle Q Clear(g_c), s	11.3	0.0	3.7	61.9	27.5	28.7
Prop In Lane	0.66	0.33	1.00			0.23
Lane Grp Cap(c), veh/h	222	0	70	2785	1245	1258
V/C Ratio(X)	0.86	0.00	0.90	0.94	0.67	0.69
Avail Cap(c_a), veh/h	302	0	70	2833	1269	1282
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	44.2	0.0	49.6	9.1	8.8	8.9
Incr Delay (d2), s/veh	16.2	0.0	72.1	6.8	1.3	1.5
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	5.7	0.0	3.0	19.1	9.5	10.1
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	60.4	0.0	121.7	15.9	10.1	10.4
LnGrp LOS	E	A	F	B	B	B
Approach Vol, veh/h	190			2671	1696	
Approach Delay, s/veh	60.4			18.4	10.3	
Approach LOS	E			B	B	
Timer - Assigned Phs	2		4		5	6
Phs Duration (G+Y+Rc), s	85.8		18.0		8.6	77.2
Change Period (Y+Rc), s	4.5		4.5		4.5	4.5
Max Green Setting (Gmax), s	82.7		18.3		4.1	74.1
Max Q Clear Time (g_c+l1), s	63.9		13.3		5.7	30.7
Green Ext Time (p_c), s	17.4		0.2		0.0	20.2
Intersection Summary						
HCM 6th Ctrl Delay			17.1			
HCM 6th LOS			B			
Notes						


Buildout + Project PM - Mitigation
4: Cactus Road & Central Main Street

10/27/2020




Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	120	60	60	2538	1551	190
Future Volume (veh/h)	120	60	60	2538	1551	190
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00			1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No	No	
Adj Sat Flow, veh/h/ln	1900	1900	1870	1870	1870	1870
Adj Flow Rate, veh/h	126	63	63	2672	1633	200
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	0	0	2	2	2	2
Cap, veh/h	144	72	80	2869	2328	281
Arrive On Green	0.13	0.13	0.05	0.81	0.73	0.73
Sat Flow, veh/h	1135	567	1781	3647	3287	385
Grp Volume(v), veh/h	190	0	63	2672	897	936
Grp Sat Flow(s),veh/h/ln	1711	0	1781	1777	1777	1801
Q Serve(g_s), s	14.9	0.0	4.8	79.5	37.6	39.9
Cycle Q Clear(g_c), s	14.9	0.0	4.8	79.5	37.6	39.9
Prop In Lane	0.66	0.33	1.00			0.21
Lane Grp Cap(c), veh/h	217	0	80	2869	1296	1313
V/C Ratio(X)	0.88	0.00	0.78	0.93	0.69	0.71
Avail Cap(c_a), veh/h	351	0	94	2951	1323	1341
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	58.4	0.0	64.4	10.2	10.1	10.4
Incr Delay (d2), s/veh	13.5	0.0	29.8	6.1	1.5	1.8
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	7.3	0.0	2.8	26.2	13.9	15.0
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	71.9	0.0	94.2	16.2	11.6	12.2
LnGrp LOS	E	A	F	B	B	B
Approach Vol, veh/h	190			2735	1833	
Approach Delay, s/veh	71.9			18.0	11.9	
Approach LOS	E			B	B	
Timer - Assigned Phs		2		4	5	6
Phs Duration (G+Y+Rc), s		114.5		21.7	10.6	103.8
Change Period (Y+Rc), s		4.5		4.5	4.5	4.5
Max Green Setting (Gmax), s		113.1		27.9	7.2	101.4
Max Q Clear Time (g_c+l1), s		81.5		16.9	6.8	41.9
Green Ext Time (p_c), s		28.5		0.4	0.0	26.8
Intersection Summary						
HCM 6th Ctrl Delay			17.8			
HCM 6th LOS			B			
Notes						
User approved volume balancing among the lanes for turning movement.						


Cactus Road / Airway Road – Buildout of Community PM

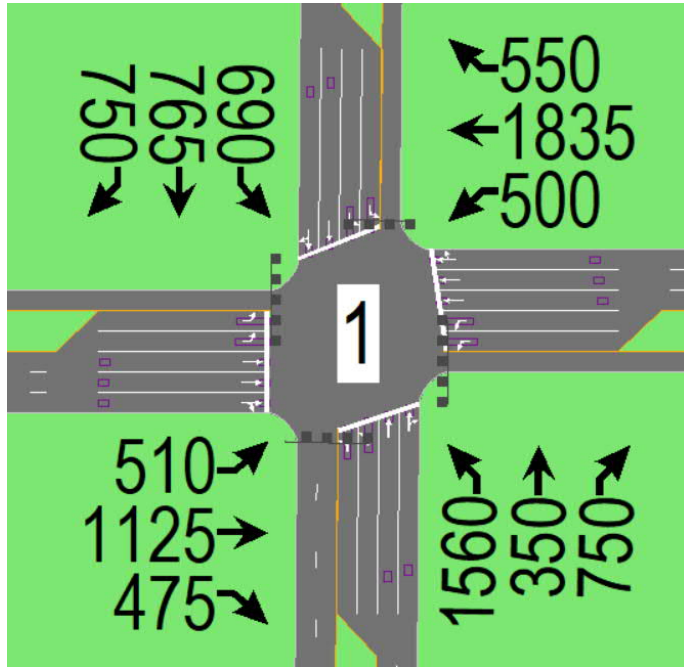


Lumina II – Trip Assignment

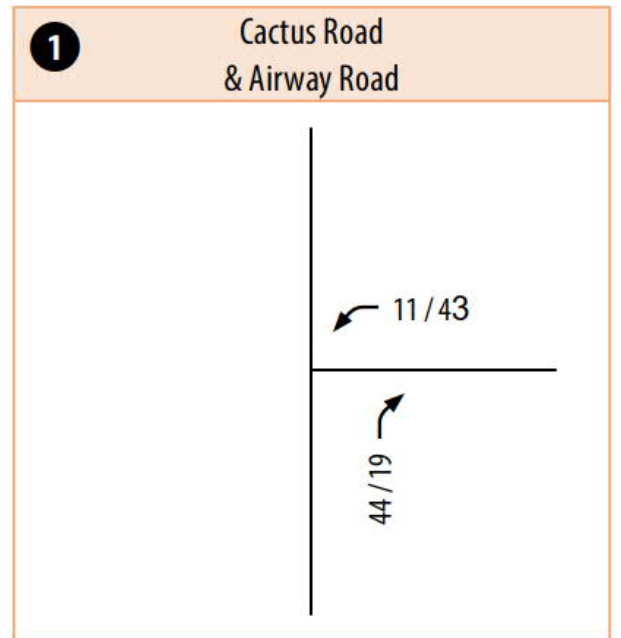


Cactus Road / Siempre Viva Road – Buildout of Community PM

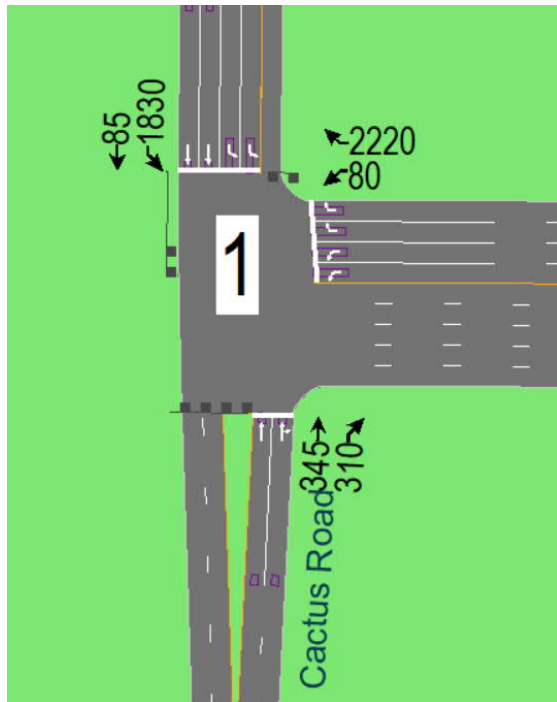


Lumina II – Trip Assignment

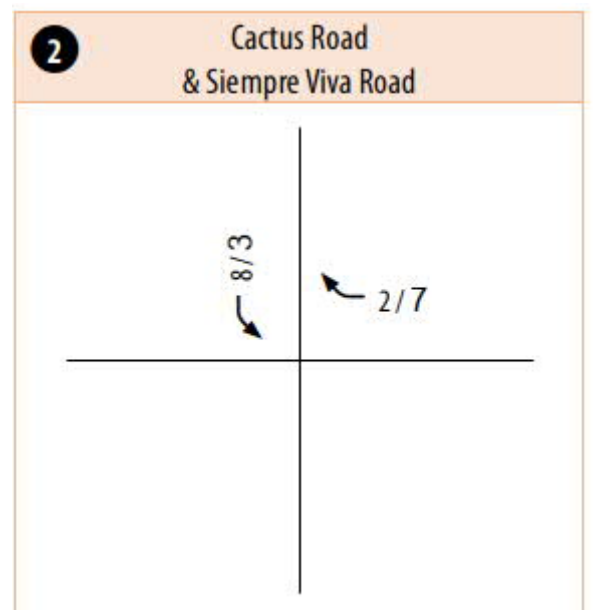


Cactus Road / Street "C" – Buildout of Community PM

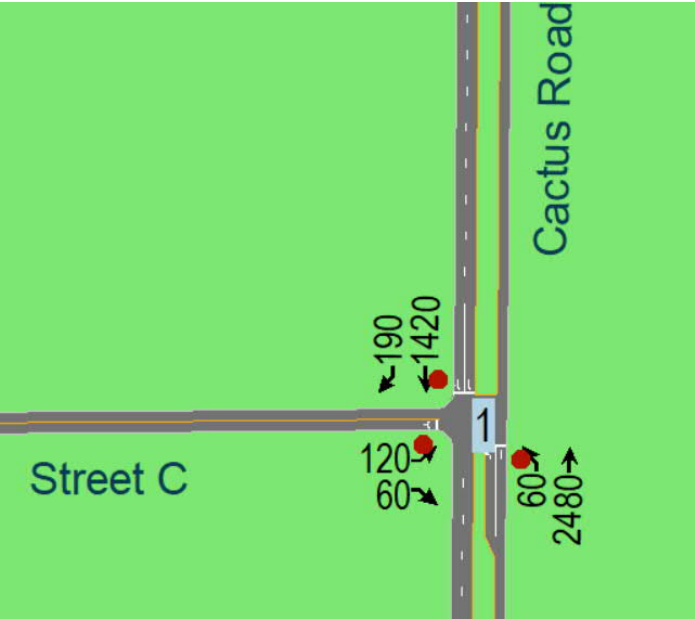


Lumina II – Trip Assignment

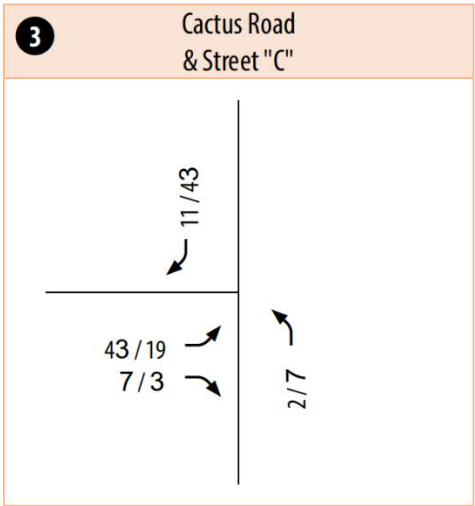

Cactus Road / Central Main Street – Buildout of Community PM

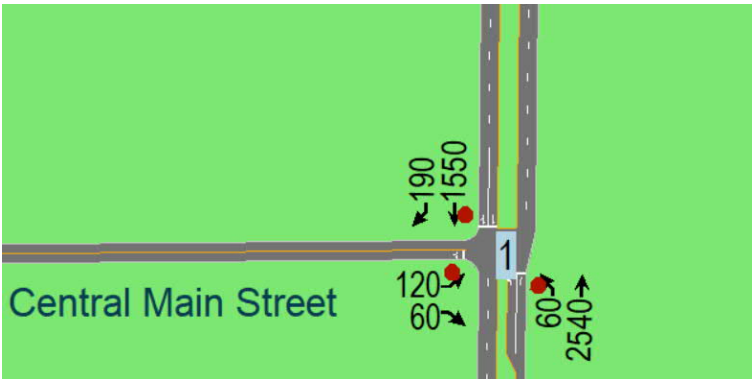

Lumina II – Trip Assignment

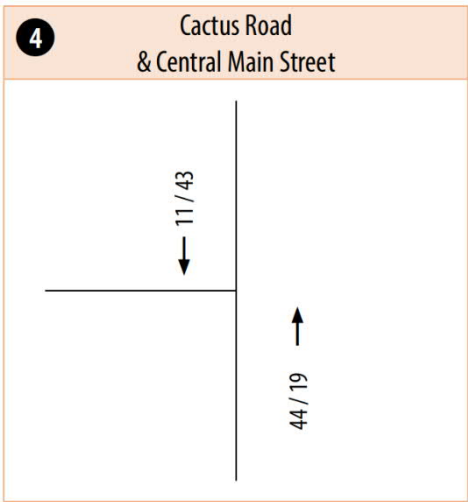

FAIR SHARE CALCULATION

The volume shown below is the sum of all movements

Intersection No.	Existing AM	Existing PM	Cumulative Projects AM Trips	Cumulative Projects PM Trips	Project Assignment AM	Project Assignment PM ¹	Buildout + Project AM	Buildout + Project PM	AM Fair Share	PM Fair Share
1	-	234	-	9799	-	61	-	9860	-	0.63%
2	-	309	-	0	-	10	-	4870	-	0.22%
3	-	0	-	4258	-	72	-	4330	-	1.66%
4	-	0	-	4458.94	-	61	-	4520	-	1.35%

Fair Share = Proposed Project Trips / (Cumulative Projects Trips + Proposed Project Trips)

¹ Based on Buildout of Community Plan trip distribution.