


NOTES:

1. PROVIDE SOLENOID ADAPTOR TO SUPPORT SOLAR CLOCK FUNCTION ON VALVE.
2. MAXIMUM RUN OF CONTROL WIRE TO REMOTE CONTROL VALVE (RCV) IS 1500' UNLESS OTHERWISE SPECIFIED.
3. SEAL CONDUIT OPENINGS WITH ELECTRICAL SEALANT.

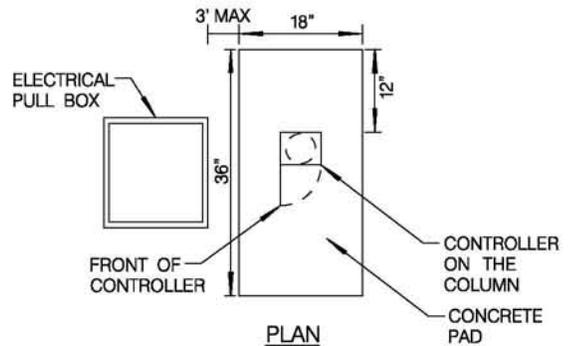

REVISION	BY	APPROVED	DATE
ORIGINAL*	KA	J. NAGELVOORT	01/12

CITY OF SAN DIEGO - STANDARD DRAWING

SOLAR IRRIGATION CONTROLLER

RECOMMENDED BY THE CITY OF SAN DIEGO
STANDARDS COMMITTEE

H. Hadli 1/31/2012
COORDINATOR R.C.E. 65271 DATE

DRAWING NUMBER **SDI-116**