


A - MONOLITHIC CONCRETE PLACEMENT

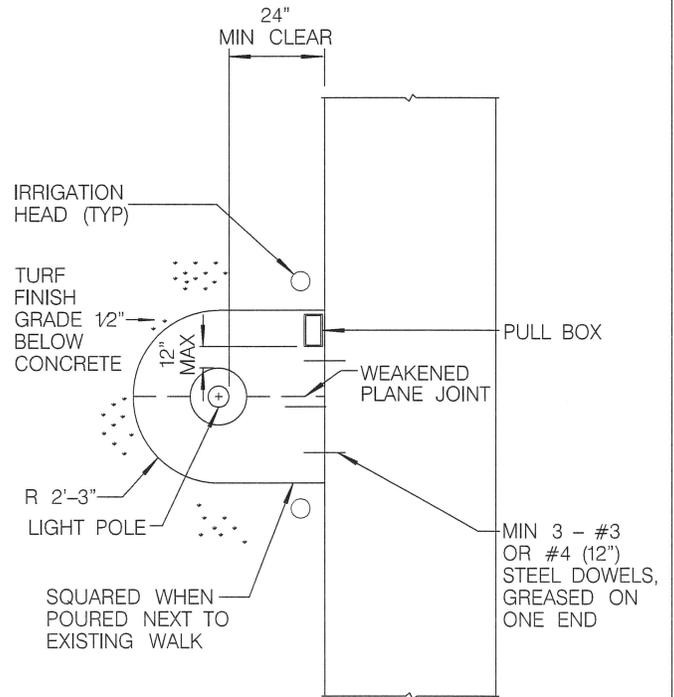

B - PAD WHEN ADJACENT TO EXISTING CONCRETE

NOTES:

1. USE MONOLITHIC PLACEMENT FOR NEW CONSTRUCTION.
2. POLE PADS SHALL DRAIN AT 1.5% MINIMUM IN SAME DIRECTION AS SIDEWALK.
3. CONCRETE PAD SHALL BE THE SAME AS SPECIFIED FOR SIDEWALK.
4. LOCATE LIGHT POLES OUTSIDE OF TURF AREAS AND AWAY FROM TREES AS APPROVED BY THE ENGINEER UNLESS SPECIFIED OTHERWISE.
5. PULL BOX WITH BOLT-DOWN LID MINIMUM 6" FROM ALL EDGES (POLYMER EDGED BOX WITH BRICK FOUNDATION).
6. IRRIGATION HEAD SHALL BE CLEAR OF CONCRETE WALK OR PAD PER SECTION 801-5.5.2 OF THE WHITEBOOK.

REVISION	BY	APPROVED	DATE
ORIGINAL*	KA	J. NAGELVOORT	01/12
UPDATED	KC	J. NAGELVOORT	10/15

CITY OF SAN DIEGO - STANDARD DRAWING

**LIGHT POLE PAD IN TURF AREAS**

RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE

*CA Buningca* 10/15/15  
COORDINATOR R.C.E. 56523 DATE

DRAWING NUMBER **SDL-105**