


SECTION A-A

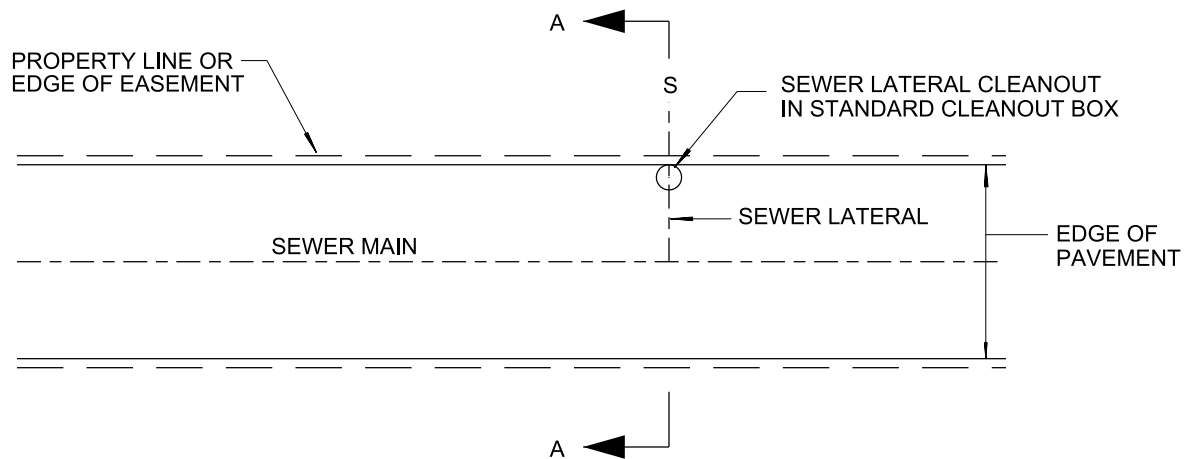

PLAN

NOTES:

1. RISER AND CLEANOUT PLUG SHALL BE SAME DIAMETER AS SEWER LATERAL.
2. CLEANOUT SHALL BE PLACED INSIDE A STANDARD CLEANOUT BOX.
3. INSTALL WARNING/ IDENTIFICATION TAPE **PER SDM-105**.
4. LATERALS ARE NOT ALLOWED IN DRIVEWAYS.
5. CONCRETE PAD SHALL BE 560-C-3250 CONCRETE 6 INCHES DEEP AND 6 INCHES AROUND CLEANOUT BOX.
6. CLEAN OUT COVERS IN THE PAVED ALLEY/ROADWAY OR OTHER AREAS SUBJECT TO VEHICULAR LOADING SHALL BE CAST IRON.

REVISION	BY	APPROVED	DATE	CITY OF SAN DIEGO – STANDARD DRAWING	RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE
ORIGINAL	SS	A. OSKOUJ	12/03		SEWER LATERAL CLEANOUT (IN PAVED ALLEY OR OTHER AREAS SUBJECT TO TRAFFIC)
UPDATED	KA	J. NAGELVOORT	01/12		
UPDATED	JN	J. NAGELVOORT	02/18	DRAWING NUMBER	
REDRAFTED	CD	J. NAGELVOORT	09/18	SDS-102	
UPDATED	TP	J. NAGELVOORT	09/20		