

2016 Substantial Conformance Review for Individual Maintenance Plan (IMP) and Individual Technical Assessments for Tijuana River Pilot Channel and Smuggler's Gulch, City of San Diego Site Development Permit No. 1134892, Master Storm Water System Maintenance Program

Appendix D

Individual Water Quality Assessment (IWQA)

July 1, 2016

8685

Stephanie Bracci
Senior Planner
City of San Diego
Transportation and Storm Water Department, Operations and Maintenance
2781 Caminito Chollas, MS 44
San Diego, CA 92105

Subject: *Master Storm Water System Maintenance Program- Tijuana River Valley Channel Maintenance Project Individual Water Quality Assessment*

Dear Ms. Bracci:

In conformance with the City of San Diego (City) modified Master Storm Water System Maintenance Program's (Master Maintenance Program or MMP) amended Site Development Permit (SDP) No. 1134892 and Program Environmental Impact Report (PEIR) Project No. 42891/SCH No. 2004101032, the attached *Individual Water Quality Assessment (IWQA) Report (2013 IWQA)* document is submitted as part of the Substantial Conformance Review (SCR) package for the Tijuana River Valley Channel Maintenance Project.

Maintenance activities associated with the Tijuana River Valley Channel Maintenance Project have occurred periodically since 2013. Maintenance activities have generally been conducted between September 15 and March 15 each year to avoid potential impacts to nesting birds. Formal regulatory approval and implementation of detailed protocol survey mitigation measures have allowed the City to conduct maintenance activities as-needed and weather permitting throughout the calendar year for the Tijuana River Valley Channel Maintenance Project. Accordingly, this 2016 SCR submittal package (2016 SCR) is intended to address maintenance activities that will be conducted in the 2016-2017 maintenance period, which begins September 15, 2016 and ends September 14, 2017 (2016-2017 maintenance period).

Maintenance activities conducted under the MMP as part of the Tijuana River Valley Channel Maintenance Project were first conducted in 2013. An SCR package containing an Individual Maintenance Plan (IMP), IWQA, and other associated Individual Assessments (IAs) was approved in January 2013 (2013 SCR) for maintenance conducted in the 2013-2014 maintenance period. A second SCR package for maintenance conducted in the 2015-2016 maintenance period (2015 SCR), included an updated IMP (2015 IMP) and a Year 2 Receiving Water Monitoring Report for water quality monitoring activities conducted in May 2015, and was approved in July 2015. Existing conditions and mitigation impacts were re-evaluated and documented in an IWQA summary technical review, included as part of the 2015 SCR package.

Existing conditions, current available water quality data, and mitigation impacts were re-evaluated in June 2016 in order to assess conditions related to water quality resources in advance of the 2016-2017 maintenance period. Water quality resource conditions remain substantially similar to those described in the 2015 IWQA summary technical review, and those described in the water quality-related portions of the 2013 and 2015 SCR. Accordingly, this letter provides a summary technical review performed by a Professional Engineer, of the 2013 IWQA as it applies to current conditions in the Tijuana River Valley Channel Maintenance Project area. This letter and attachments serve as the basis for SCR determination for maintenance work to be conducted during the 2016-2017 maintenance period as part of the Tijuana River Valley Channel Maintenance Project.

PROJECT HISTORY AND BACKGROUND

The Tijuana River Valley Channel Maintenance Project includes maintenance of the Pilot Channel and Smuggler's Gulch Channel as part of the MMP. The Pilot Channel is included on MMP Maps 138a through 138c and the Smuggler's Gulch Channel is included on MMP Maps 138 and 139 (City of San Diego 2011). Environmental permits were issued by the California Department of Fish and Wildlife (CDFW), Regional Water Quality Control Board (RWQCB), United States Fish and Wildlife Service (USFWS), Army Corps of Engineers (ACOE), and the California Coastal Commission (CCC) in 2012 and 2013 based on the project scope, impacts, and mitigation. Maintenance activities in the Pilot Channel and Smuggler's Gulch Channel were conducted in the 2013 – 2014 and 2015-2016 maintenance periods. Appropriate construction-related Best Management Practices and concurrent wetland compensatory mitigation have been implemented as part of the comprehensive channel maintenance project. The City is also working with federal, state and local agencies to address bi-national sources of sediment and trash that regularly discharge to the Pilot Channel and Smuggler's Gulch Channel.

PROJECT DESCRIPTION

Maintenance of the Pilot Channel and the Smuggler's Gulch Channel includes the mechanized removal of sediment, vegetation and trash and debris from the channels. Proposed maintenance procedures for Tijuana River Valley Channel Maintenance Project channel clearing activities in the 2016-2017 maintenance period remain substantially similar to procedures incorporated as part of the IMP included in the 2013 and 2015 SCR packages.

The periodic maintenance of both channels is needed to restore the channels' flood conveyance capacity to original design condition and reduce flood risk. The maintenance activities also reduce impacts to the Tijuana River National Estuarine Research Reserve from transport of sediment and trash and debris derived from sources upstream of the project area. The project incorporates removal of approximately 10,000–30,000 cubic yards of material per maintenance period, occupying a total of 4.31 acres.

CURRENT CONDITIONS

Since the most recent maintenance activities, natural and anthropogenic processes in the upstream watershed have resulted in additional sediment, trash and debris accumulation in the channel maintenance areas. A Professional Engineer conducted a survey of the project area on June 10, 2016. Survey results indicate that site and water quality resource conditions are substantially similar to conditions evaluated as part of the 2013 IWQA. Accordingly, the 2013 IWQA findings have been determined to be generally applicable to the maintenance activities for the 2016-2017 maintenance period. Specific to the Tijuana River Valley Channel Maintenance Project, the following conditions should be noted:

- Based on historical sediment accumulation rates within the Tijuana River Valley maintenance channels, it is expected that maintenance activities and SCR submittals will be necessary for the future of this maintenance program.
- The 2013 IWQA and other water quality-related portions of the 2013 and 2015 SCR were reviewed in May 2016 by Dudek.
- The 2013 IWQA identifies that the channel maintenance areas are generally dry during dry weather conditions. The channels are temporarily inundated with storm water for short periods after major storm events. Dry weather diversions in the upstream channel areas near the international border continue to prevent significant dry weather flows to the maintenance area and leads to persistent dry conditions. The Pilot Channel currently has stagnant water ponded throughout the maintenance area.
- Available water quality monitoring data includes results from September 2013, February 2014, and May 2015, for nutrients, total suspended solids, turbidity, and chlorophyll-a, as well as California Rapid Assessment Method for Wetlands and Riparian Areas (CRAM). Water quality results generally have been elevated in samples collected upstream of the Pilot Channel maintenance area when compared to downstream samples. The overall CRAM score at the upstream and downstream Pilot Channel locations are relatively similar across all monitoring events both pre- and post-maintenance. The Pilot Channel upstream and downstream scores have been consistently elevated relative to the Smuggler's Gulch upstream score with the exception of the May 2015 event. The increased CRAM score during the last survey is driven by a decrease in bankfull width by over 50% from the previous three monitoring events. All events indicate low taxa richness and diversity scores and signify a benthic community comprised of generally tolerant organisms, and no intolerant individuals present.
- Within the context of the limited monitoring data available, comparisons of current data with previous monitoring results for water quality, benthic biological monitoring, and CRAM for the Tijuana River Valley Channel Maintenance Project do not appear to indicate significant water quality impacts. This observation supports the findings of the 2013 IWQA. It should be noted that due to the limited amount of data currently available, it is difficult to make clear determinations of definitive trends in data, or whether meaningful statistical differences exist between the monitoring stations over time. As more data is collected, statistical analyses may provide important information

for identifying trends over the course of the Tijuana River Valley Channel Maintenance Project.

- As described in the 2015 IMP, pre-maintenance pumping may be necessary to dry ponded water in the channel areas to allow mechanized equipment use. As necessary for the 2016-2017 maintenance period, protocol surveys to identify nearby critical occupied nests will be utilized to guide noise-related and other mitigation measures to comply with regulatory requirements. These measures were documented in the 2015 SCR.

In summary, evaluation of current conditions and review of the 2013 IWQA, and the 2013, 2014, and 2015 SCR packages, as well as review of Certification-required monitoring components, did not identify new significant environmental impacts to water quality resources that have not already been identified, addressed, and/or mitigated by the required conditions set forth in the associated SDP and PEIR. Therefore the proposed maintenance would substantially conform to the existing permit and environmental document.

Please contact me by phone (310.780.2959) or by e-mail (hlamberson@dudek.com) with questions or requests for clarification.

Respectfully,

Heather L. Lamberson



Heather Lamberson, PE
Senior Engineer
DUDEK

Attachment A - 2013 Individual Water Quality Assessment (as part of the 2015 Substantial Conformance Review submittal)

Attachment A
City of San Diego Channel Maintenance 2013 – Individual Water Quality Assessment
(IWQA) Report for Tijuana River Pilot Channel and Smuggler’s Gulch

July 15, 2015

8685

Christine Rothman
Development Project Manager III
City of San Diego
Transportation and Storm Water Department, Operations and Maintenance
2781 Caminito Chollas, MS 44
San Diego, CA 92105

Subject: *Master Storm Water System Maintenance Program- Tijuana River Valley Channel Maintenance Project Individual Water Quality Assessment*

Dear Mrs. Rothman:

In conformance with the City of San Diego (City) modified Master Storm Water System Maintenance Program's (Master Maintenance Program or MMP) amended Site Development Permit (SDP) No. 1134892 and Program Environmental Impact Report (PEIR) Project No. 42891/SCH No. 2004101032, the attached *Individual Water Quality Assessment (IWQA) Report (2013 IWQA)* document is submitted as part of the Substantial Conformance Review (SCR) package for the Tijuana River Valley Channel Maintenance Project.

The 2013 IWQA was originally submitted as part of the approved Tijuana River Valley Channel Maintenance Project SCR package in December 2013 (hereafter 2013 SCR). Conditions related to water quality remain substantially similar to those described in the attached 2013 IWQA. Accordingly, this letter provides a summary technical review of the IWQA submitted as part of the 2013 SCR as it applies to current conditions in the Tijuana River Valley Channel Maintenance Project area. This letter and attachments serve as the basis for SCR determination for maintenance work in 2015-2016 as part of the Tijuana River Valley Channel Maintenance Project. The technical review was performed by a California Professional Engineer.

PROJECT HISTORY AND BACKGROUND

The Tijuana River Valley Channel Maintenance Project includes maintenance of the Pilot Channel and Smuggler's Gulch Channel as part of the MMP. The Pilot Channel is included on MMP Maps 138a through 138c and the Smuggler's Gulch Channel is included on MMP Maps 138 and 139 (City of San Diego 2011). The Pilot Channel and Smuggler's Gulch Channel maintenance project Individual Maintenance Plan (IMP) and Individual Assessment (IA) package received SCR approval in February 2013. Appropriate environmental permits were also issued by the California Department of Fish and Wildlife (CDFW), Regional Water Quality Control Board (RWQCB), United States Fish and Wildlife Service (USFWS), Army Corps of Engineers (ACOE), and the California Coastal Commission (CCC) in 2012 and 2013 based on the project scope, impacts, and mitigation. Maintenance activities in the Pilot Channel and Smuggler's Gulch

Channel were conducted between September 23, 2013 and March 14, 2014. Appropriate construction-related Best Management Practices and concurrent wetland compensatory mitigation have been implemented as part of the comprehensive channel maintenance project.

PROJECT DESCRIPTION

The currently proposed maintenance of the Pilot Channel and the Smuggler's Gulch Channel includes the mechanized removal of sediment, vegetation and trash and debris from the channels. Proposed maintenance procedures for channel clearing activities in 2015-2016 as part of the Tijuana River Valley Channel Maintenance Project remain substantially similar to procedures proposed as part of the 2013 SCR and implemented in the 2013-2014 maintenance period.

The periodic maintenance of both channels is needed to restore the channels' flood conveyance capacity to their original design condition and to protect the Tijuana River National Estuarine Research Reserve from impacts due to downstream transport of accumulated sediment and trash and debris from the project area. The project incorporates removal of approximately 10,000–30,000 cubic yards of material, occupying a total of 4.31 acres.

CURRENT CONDITIONS

Since channel maintenance work was conducted in 2014, natural and anthropogenic processes in the upstream watershed have resulted in additional sediment, trash and debris accumulation in the channel maintenance areas. Site conditions have generally returned to pre-maintenance conditions evaluated as part of the 2013 SCR package. The 2013 SCR and current conditions have been reviewed and the 2013 IWQA has been determined to be generally still applicable to the work anticipated this fall. Specific to the Tijuana River Channel Maintenance Project, the following conditions should be noted:

- The 2013 IWQA and other portions of the 2013 SCR were reviewed in June 2015 by Dudek.
- The 2013 IWQA identifies that the channel areas are generally dry during dry weather conditions. The channels are temporarily inundated with storm water for short periods after major storm events. Dry weather diversions in the upstream channel areas near the international border continue to prevent significant dry weather flows to the maintenance area and leads to persistent conditions.
- The San Diego Regional Water Quality Control Board (RWQCB) issued an amendment to the project Clean Water Act Section 401 Water Quality Certification (Certification) and acknowledged enrollment under State Water Resources Control Board (SWRCB) Order No. 2003-17-DWQ for Statewide General Waste Discharge Requirements for Dredged or Fill Discharges for the Tijuana River Valley Channel Maintenance Project 09C-077. The Certification requires three monitoring components including: water quality assessment, benthic biological monitoring, and California Rapid Assessment Method (CRAM) to help quantify the potential impacts to the Tijuana River from the

maintenance activities. Samples are collected upstream and outside of the Pilot Channel and Smuggler's Gulch maintenance areas and downstream and outside of the Pilot Channel maintenance area in order to collect water quality samples from areas where water is present. Monitoring was implemented in January 2013 prior to maintenance, and three subsequent monitoring events occurred in association with the first maintenance event between September 2013 and February 2014. A recent monitoring event took place on May 12, 2015.

- Review of the water quality monitoring results indicates that nutrient, total suspended solids, and chlorophyll-a (when detected) concentrations have been consistently elevated in samples collected upstream of the Pilot Channel when compared to downstream samples. Generally, water has not been present in the Smuggler's Gulch channel. The overall CRAM score at the upstream and downstream Pilot Channel locations are relatively similar across all monitoring events both pre- and post-maintenance. The Pilot Channel upstream and downstream scores have been consistently elevated relative to the Smuggler's Gulch upstream score with the exception of the last event. The increased CRAM score during the last survey is driven by a decrease in bankfull width by over 50% from the previous three monitoring events. The bankfull width decrease is generally related to impacts of sediment accumulation in the channel. There have been no discernable changes in the benthic biological community observed across monitoring events at the downstream Pilot Channel location. All events indicate low taxa richness and diversity scores and signify a benthic community comprised of generally tolerant organisms, and no intolerant individuals present.
- Based on review of the limited available water quality data, benthic biological monitoring, and CRAM results, the Tijuana River Valley Channel Maintenance Project is not resulting in significant water quality impacts. This conclusion supports the findings of the 2013 IWQA.
- Pre-maintenance pumping is planned to dry ponded water in the eastern portion of the Pilot Channel and allow mechanized equipment use. The pre-maintenance pumping will likely occur in stages. The pumping process will begin with the placement of a suction hose within the Pilot Channel near Hollister Street Bridge, placing a pump adjacent to the channel, and the placing of temporary hoses along the channel bank to a discharge location, likely near the confluence of the Pilot Channel and SG Channel. Critically silenced pumps will be used throughout the project. The second stage would involve a similar set up of equipment placed further downstream to pump water from the confluence to the downstream (western) end of the Pilot Channel. Additional pumping may be required if rains occur during the project and result in ponded water pools within the work area.
- The pre-maintenance pumping process is intended to convey stagnant ponded water away from the eastern portion of the Pilot Channel. Upstream discharges, shallow groundwater, fine sediment accumulation, and biological processes may prevent infiltration of water at the upstream location. Dry, downstream locations with sandy

Mrs. Christine Rothman

Subject: Tijuana River Valley Channel Maintenance Project- Individual Water Quality Assessment

substrate may allow infiltration of the ponded water as part of the pump discharge. As such, there may be an overall water quality benefit related to the pre-maintenance pumping through infiltration of ponded water containing elevated nutrient concentrations and other constituents.

- Errata: a unit-conversion error was noticed in Attachment 8 (SG and Pilot Channel Sediment Pollutant Loading Calculations) of the IWQA. Sediment pollutant loading estimates should be divided by 10^6 .

In summary, evaluation of current conditions and review of the 2013 IWQA and Certification-required monitoring components identify that conditions are substantially similar to the conditions identified in the 2013 IWQA. Therefore the proposed maintenance would substantially conform to the existing permit and environmental document.

Please contact me by phone (760.479.4143) or by e-mail (hlamberson@dudek.com) with questions or requests for clarification.

Respectfully,

Heather Lamberson, PE
Senior Engineer
DUDEK

INDIVIDUAL WATER QUALITY ASSESSMENT REPORT

Site Name/Facility: Tijuana River Pilot Channel and Smuggler's Gulch Channel

Master Program Map No.: 138a, 138b, 138c (Tijuana River Pilot Channel) and 138 and 139 (Smuggler's Gulch Channel)

Date: December 21, 2012

Civil Engineer: Matt Moore
(name, company, phone number): URS Corporation
858-812-9292

Registered Civil Engineer Number & Expiration Date RCE No. 56780, Exp. 6/30/2013
(place stamp here):



***Instructions:** This form must be completed for each target facility following the completion of the Individual Maintenance Plan (IMP) report form and prior to any work being conducted at the facility. Attach additional sheets if needed.

EXISTING CONDITIONS

The City of San Diego (City) has developed the Master Storm Water System Maintenance Program (MMP) (City of San Diego 2011a) to govern channel operation and maintenance activities in an efficient, economic, environmentally and aesthetically acceptable manner to provide flood control for the protection of life and property. This document provides a summary of the Individual Water Quality Assessment (IWQA) components conducted within the Tijuana River Pilot (Pilot) Channel and the Smuggler's Gulch (SG) Channel to comply with the MMP's Programmatic Environmental Impact Report (PEIR) (City of San Diego 2011b).

IWQA procedures under the MMP provide a methodology for a water quality management model to evaluate potential water quality benefits and impacts associated with channel maintenance activities. The site-specific field measurements and conditions provides the analytical data to determine a storm water facility's pollutant reduction potential and water quality benefits due to sediment removal; and compare it to the estimated loss of temporary pollutant sorption/retention capacity as a result of channel maintenance. The IWQA procedures are documented in the *Standard Operating Procedure (SOP) To Conduct Water Quality Assessment and Quantification Model for Flood Channel Maintenance* found in Appendix A of the Water Quality Assessment - White Paper (Appendix F of the PEIR). The SOP identifies two specific criteria for IWQA component implementation, including; 1) facility must have fairly consistent dry weather (low) flows, and 2) have vegetation capable of assimilation of pollutants. As described below, current conditions in the Pilot and SG Channels do not meet these

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS

criteria. Accordingly, the City has implemented modified sampling and analysis procedures in order to quantify the potential water quality benefits and impacts of channel maintenance activities.

Project Description:

The channels associated with this assessment report are located in the Tijuana River Valley (Valley), within the jurisdiction of the City of San Diego (City) (Figure 1). The Tijuana River watershed covers an area of approximately 1,725 square miles, of which 73 percent is located in Mexico and 27 percent in the United States. The main Tijuana River flows in a northwesterly direction from the international border into the Valley and City jurisdiction. Approximately 21.9 square miles of the watershed (~1% of the total watershed area) is within City jurisdiction.

The Tijuana River National Estuarine Research Reserve (TRNERR) and a portion of the City of Imperial Beach are generally west of the project area located adjacent to the Tijuana River's discharge to the Pacific Ocean. The Otay-Nestor community and the United States Naval Outlying Landing Field Imperial Beach are located north of the project area; and the community of San Ysidro is located to the east.

The Pilot Channel is included on MMP Maps 138a through 138c and the SG Channel is included on MMP Maps 138 and 139 (City of San Diego 2011a). The Pilot and SG Channels are generally located in the Valley roughly bordered by Hollister Street to the east and Monument Road to the south. The Tijuana River low flow channel splits into what are commonly referred to as the Tijuana River's Northern and Southern Channels approximately 800 feet east of Hollister Street. The Pilot Channel follows the Southern Channel.

The Valley, including the project area, is within the Federal Emergency Management Agency's (FEMA) Special Flood Hazard Areas Subject to Inundation by the 1-percent Annual Chance Flood (100-year floodplain). The project areas are zoned OF-1-1 (Open Space-Floodplain) and AR-1-1 (Agricultural/Residential); and are designated for Open Space and Agricultural land uses in the Tijuana River Valley Land Use Plan. In addition, the project area is within the boundaries of the County of San Diego's 2.7 square mile Tijuana River Valley Regional Park (Regional Park). The project area is also within the City's Multiple Species Conservation Program's Multi-Habitat Planning Area (MHPA).

The project consists of maintenance and dredging of the Pilot and SG channels to remove anthropogenic-derived sediment and trash that accumulates as a result of development and other practices in the upstream watershed. The removal of sediment and trash is conducted to maintain flow conveyance capacities and reduce the risk of flooding to public and private infrastructure in the Valley.

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS
Description of creek/channel geometry(length, width, and depth):
<u>Pilot Channel</u> <p>The Pilot Channel was originally excavated in 1993 within the Southern Channel. It has been irregularly maintained since that time as an earthen trapezoidal channel that is approximately 5 feet deep, with a 23-foot top width, and a 15-foot streambed width. According to the MMP, the Pilot Channel was constructed to divert wet-weather flows from 2- to 5-year storm events into the Southern Channel (City of San Diego 2011b). The Pilot Channel stretches from 100 feet east to 5,300 feet west of Hollister Street for a total length of 5,400 feet and it flows roughly in an east-west direction.</p>
<u>SG Channel</u> <p>The SG Channel is an existing historical agricultural channel with manufactured berms. The contributing sub-watershed area is approximately 6.7 square miles, primarily located south of the international border within Canon de los Mataderos. The SG Channel, as originally constructed, is an earthen channel approximately 20 feet wide and 15 feet deep. The SG Channel is tributary to the South Channel and flows in a northerly direction, from the international border past Monument Road until it confluences with the Pilot Channel. The portion of the SG Channel maintained by the City extends for a distance of approximately 3,040 feet.</p>
Existing Conditions:
<p>The Tijuana River Watershed Management Area (WMA) is located in the southern portion of San Diego County. Surface waters in the Tijuana River WMA are subject to comply with the Water Quality Control Plan for the San Diego Basin (Basin Plan) that designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for receiving waters. Based on water quality data collected within the Tijuana WMA, the Tijuana River is classified as a Category I (impaired) watershed due to a wide variety of water quality problems. Stormwater flows in the Tijuana River contain high concentrations of sediment, trash, coliform bacteria, trace metals (copper, lead, zinc, chromium, nickel, and cadmium), PCBs, and other urban, agricultural, and industrial pollutants. Sources of pollutants include non-point agricultural sources on the U.S. side of the border and a large variety of point and non-point sources on the Mexican side of the border.</p> <p>During the site visit and sediment sampling activities conducted on November 14, 2012, it was observed that the SG Channel streambed was generally dry, unvegetated, and filled with sediment intermixed with trash and waste tires. The Pilot Channel was similarly dry</p>

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS

along most of its length and filled with sediment containing trash and waste tires along the majority of the length.

In some areas near the eastern and western ends of the Pilot Channel there were fallen trees and invasive plant species such as castor bean and arundo. Ponded water was observed in the Pilot Channel immediately east and west of the Hollister Bridge.

In March 2009, United States Customs and Border Protection engineers completed a dry weather diversion structure at the SG Channel crossing at the international border. The purpose of this structure is to divert up to 21.5 cubic feet per second or 14 million gallons per day of dry weather flows from Mexico to the sanitary sewer. This infrastructure prevents dry weather flows from entering the SG Channel and essentially eliminates direct dry weather input to the Pilot Channel.

Within the context of the IWQA components, this elimination of dry weather flow, combined with the fact that much of the SG Channel is void of vegetation and the Pilot Channel harbors primarily non-native and invasive plant species, there is little potential for water quality impacts from channel maintenance resulting from the loss of pollutant assimilative capacity through vegetation removal.

Description of Sediment Sampling Activities (locations (s), depth, shipment/delivery to laboratory(s)):

Given the relatively unique existing conditions of the SG Channel and Pilot Channel where dry weather flows are generally diverted to the sanitary sewer, the City employed a sediment characterization-based sampling strategy. The purpose of the sampling activities was to characterize site-specific conditions to evaluate potential water quality benefits of channel maintenance.

Five locations as indicated on Attachment 1 were selected for sediment sampling activities. These locations were deemed representative of the sediment characteristics within the SG and Pilot Channels. The locations were selected based on visual observation of the sediment characteristics and channel features including vegetation, hydrosoil, and hydroperiod. Further, sampling and analyses activities conducted during previous channel clearing activities have indicated that accumulated sediment in these channels generally does not have levels of potential pollutants that exceed human health or ecological risk screening criteria (City of San Diego 2010). Based on these results and the existing conditions, five samples were deemed appropriate for characterization of sediments channel for the purpose of the IWQA. It should be noted that this sample strategy resulted in collection of fewer samples than described in the SOP.

The five soil borings were advanced on November 14, 2012 (Attachment 1). Three borings (SG-1, TJ-1, and TJ-2) were advanced by Tri-County Drilling using a limited

Tijuana River Pilot Channel & Smuggler's Gulch Channel
Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS

access, rubber-tracked, hollow-stem auger drill rig. Two boring locations (SG-2 and TJ-3) were not accessible with the drill rig and were advanced using a stainless-steel hand auger. The borings were advanced to a depth of between two and five feet. The depth of each boring was estimated in the field based on best professional judgment of sediment accumulation in the channel relative to design dimensions. Borings SG-1 and SG-2 were drilled along the SG Channel north and south, respectively of the Disney Crossing. Borings TJ-1 and TJ-2 were drilled along the Pilot Channel. Boring TJ-1 was located approximately 250 feet east and boring TJ-2 was located approximately 350 feet west of the confluence with the SG Channel. Boring TJ-3 was located approximately 1,000 feet west of the confluence. Sediment samples from this boring were archived for possible analyses. A photo log of the November 14, 2012 site visit is included in Attachment 2.

The borings were logged by a URS geologist under the oversight of a California Professional Geologist in accordance with the Unified Soil Classification System (USCS). Sediment samples were collected continuously from each of the borings using a standard penetration sampler fitted with stainless-steel tubes to the total depth drilled. Boring logs can be found in Attachment 3. Bulk sediment samples were collected prior to drilling at the location of borings SG-1 and TJ-2 for grain-size analyses in accordance with ASTM-D6913-04. These samples were collected using a shovel from the ground surface to 1.5 feet below ground surface and placing the soil into two 5-gallon buckets per location. Lids were placed on the buckets and each was labeled with a sample ID and sample depth. Grain-size gradation curves are provided in Attachment 4.

The sediment from each sample interval was placed into a clean stainless steel bowl and then homogenized using a clean wooden spoon. After the sediment was homogenized it was split into two, laboratory-supplied, clean 8-ounce glass jars that were labeled with the sample ID. The samples were placed in an insulated cooler with ice and maintained at 4 degrees C and transported under chain-of-custody (COC) procedures. COC documentation can be found in Attachment 5. Some sediment was placed into a resealable plastic bag, disaggregated and then monitored for the presence of organic vapors using a Photo Ionization Detector (PID). Sampling equipment was decontaminated before and after each sample was collected by rinsing with an Alconox (non-phosphate) detergent solution followed by twice rinsing with distilled water. Rinse water was collected and disposed of in accordance with applicable local, state and federal guidelines.

Sediment chemical analyses were conducted by Pat-Chem Laboratories, Inc. of Moorpark, California, a state-accredited laboratory. The samples were analyzed for the constituents identified in the SOP. In addition, the samples were also analyzed for organochlorine pesticides by EPA Method 8081. The laboratory analytical and tabulated results of indicated constituents can be found in Attachment 6.

Tijuana River Pilot Channel & Smuggler's Gulch Channel
Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS
Description of Flow Measurement Activities (location(s) and equipment):
<p>As described above, the SG Channel and Pilot Channel generally do not experience dry weather flows as a result of dry weather diversion structures adjacent to the international border. There was no flowing water, nor evidence of recently flowing water in the SG Channel and Pilot Channel during the sediment sampling activity visit on November 14, 2012. Accordingly, flow measurement activities were not conducted as part of this IWQA.</p>
Description of Volume Measurement Activities (interval, total number, equipment):
<p>The SG and Pilot channels do not behave like natural treatment systems as described in the PEIR's Water Quality Assessment - White Paper. As mentioned above, the SG and Pilot Channels generally do not experience dry weather flows as a result of dry weather diversion structures adjacent to the international border. There was no flowing water, nor evidence of recently flowing water in the SG Channel or Pilot Channel during the sediment sampling activity visit on November 14, 2012. Accordingly, volume measurement activities were not conducted as part of this IWQA.</p>
Description of Water Quality Sampling Activities (location(s), shipment/delivery to laboratory(s)):
<p>As described above, the SG Channel and Pilot Channel generally do not experience dry weather flows as a result of dry weather diversion structures adjacent to the international border. There was no flowing water, nor evidence of recently flowing water in the SG Channel or Pilot Channel during the sediment sampling activity visit on November 14, 2012.</p> <p>Standing water is present in a limited area of the Pilot Channel during dry weather conditions. Sampling from these locations is not representative of water quality conditions consistent with the criteria outlined in the SOP. The purpose of water quality sampling in storm water facilities is to evaluate potential to improve water quality through sequestration of pollutants by vegetation within the channel. This is accomplished by collecting water quality samples at the upstream and downstream edges of the facility. Water quality samples collected from ponded water only provide data on the water quality for each specific pool. This data will not be an accurate representation of the pollutant removal capacity of the SG and Pilot Channels. Accordingly, water quality sampling activities were not conducted as part of this IWQA.</p>

**Tijuana River Pilot Channel & Smuggler’s Gulch Channel
Appendix D - Individual Water Quality Assessment Report**

EXISTING CONDITIONS

Description of Wetland Assessment (Existing) Activities (personnel, general conditions):

Using the results of the IBA site survey, both the SG and Pilot Channels were assessed according to the scoring system laid in the SOP. Three macrofeatures of wetland treatment systems were assessed: existing vegetation, hydrosol, and hydroperiod. Scores for these features are presented in Table 1. Scoring criteria definitions are found in Attachment 7.

Table 1. Existing Wetland Macrofeature Assessment Matrix

Wetland Macrofeature	SG Channel	Tijuana Pilot Channel
Existing Vegetation	0	1
Hydrosol	2	1
Hydroperiod	0	1
Total Score	2	3

SG Channel

Due to lack of vegetation, high sediment deposition, and lack of flow in the SG Channel during dry weather conditions, the overall rating for the SG Channel is two. According the SOP, this equals a “poor” rating and does not provide evidence that the existing conditions provide adequate conditions for sorption and deposition of suspended solids and associated constituents of concern.

Pilot Channel

Due to the presence of highly invasive non-native vegetation, high sediment deposition, and lack of flow in the Pilot Channel during dry weather conditions, the overall rating for the SG Channel is three. According the SOP, this equals a “fair” rating and does not provide evidence that the existing conditions provide adequate conditions for significant sorption and deposition of suspended solids and associated constituents of concern.

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS

Description of Wetland Assessment (Recovery) Activities (personnel, general conditions):

The City has been responsible for maintaining the SG and Pilot Channels for nearly two decades. During this period, the City has irregularly maintained portions of each channel. In recent years, stormwater flow and associated sediment deposition dynamics have resulted in rapid sedimentation of the SG and Pilot Channels.

As an example, in October through November 2009 the City removed a combined 30,000 cubic yards of accumulated sediment, trash and non-native vegetation, from a significant portion of the SG and Pilot Channel project footprint. Subsequent storm events in November and December 2009 deposited a significant amount of sediment in the two channels, reducing channel capacity and demonstrating that the SG and Pilot Channels generally aggrade sediment and trash during storm events (Figure 1).

Tijuana River Pilot Channel & Smuggler's Gulch Channel
Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS

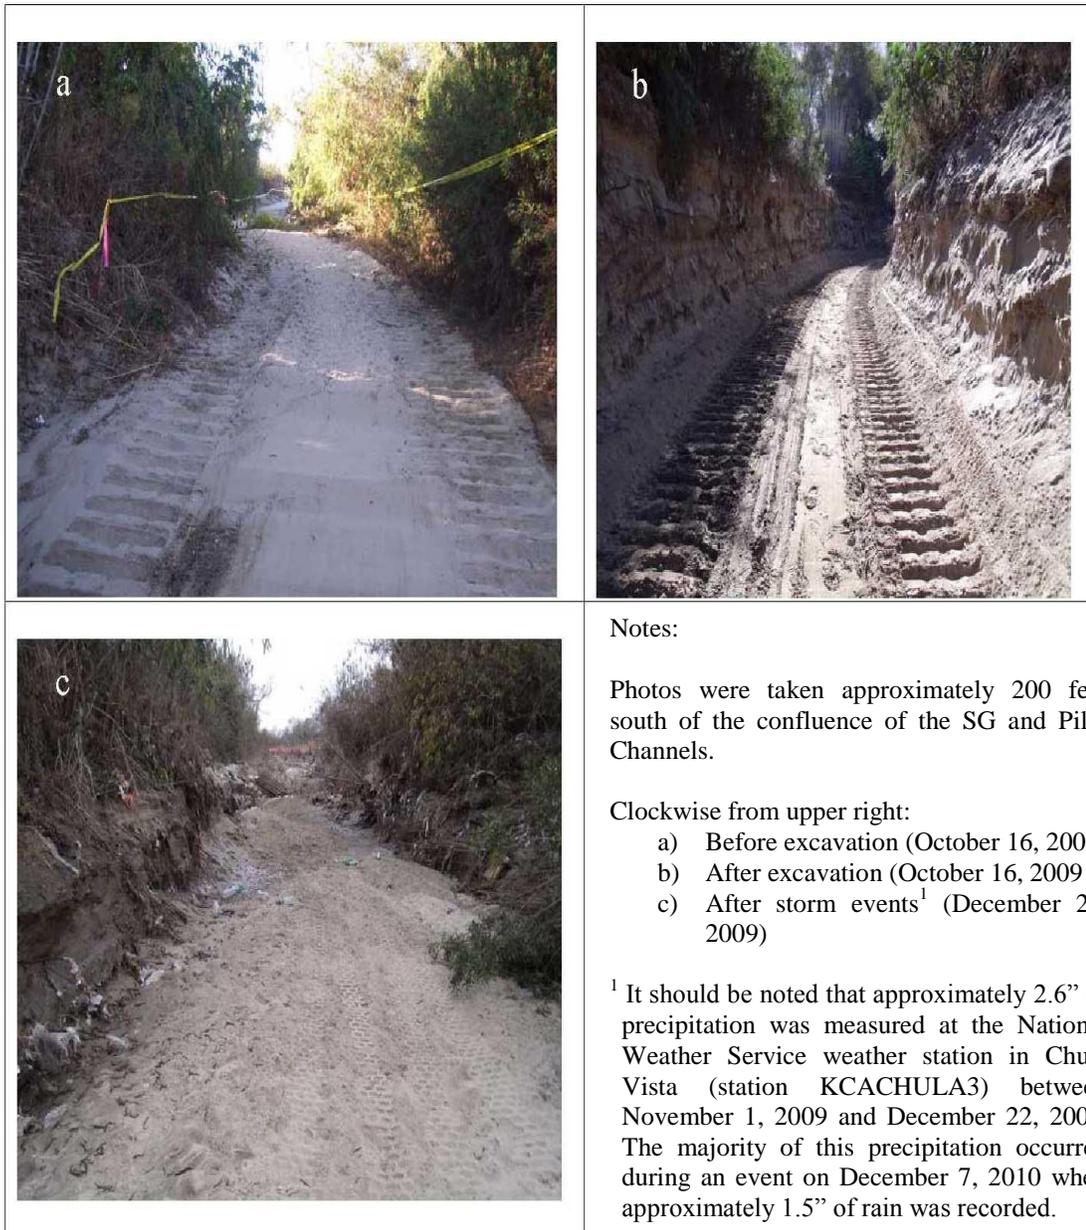


Figure 1. Example of the sediment accumulation cycle in the SG Channel.

Accordingly, some aspects of the SOP-based Existing Maintenance Storm Water Facility- Recovery Scoring System are not applicable to the SG and Pilot Channels (Table 2). Specifically, the existing vegetation recovery score is primarily based on the recovery potential for existing terrestrial and/or wetland vegetation. The scoring system does not adequately provide characterization guidance for situations where existing vegetation is not present or is primarily composed of invasive non-native vegetation.

**Tijuana River Pilot Channel & Smuggler’s Gulch Channel
Appendix D - Individual Water Quality Assessment Report**

EXISTING CONDITIONS

Table 2. Recovery Wetland Macrofeature Assessment Matrix

Wetland Macrofeature	SG Channel	Tijuana Pilot Channel
Existing Vegetation	NA ¹	NA ²
Hydrosoil	1	1
Hydroperiod	1	1
Total Score	--	--

¹ The SOP does not identify a score for recovery to a non-vegetated state.

² The SOP does not identify a score for recovery to a vegetated state primarily composed invasive non-native vegetation.

Based on these scores, it is estimated that the total recovery score for the SG and Pilot Channels is between two and four, or a “poor” to “fair” rating. These scores provide evidence that the recovery conditions will not provide adequate conditions for significant sorption and deposition of suspended solids and associated constituents of concern.

Sediment Pollutant Loading Estimates:

Four of the five sediment samples were analyzed for the constituents identified in the SOP. Based on analytical results of previous City sampling activities in the area, pesticides were also added to the constituent list.

The analytical results generally indicate that the sampled sediment in the SG and Pilot Channels do not contain constituents in concentrations greater than the screening criteria for human health. The metal Arsenic does appear to be present in the accumulated soil in concentrations that exceed the California and Regional Screening Levels (RSL) (Attachment 6). It should be noted that background soil in many areas of the U.S., including California, contains arsenic at concentrations above the California Human Health Screening Level (CHHSL). The concentrations of arsenic detected in the samples ranged from 1.9 to 4.8 mg/kg. The Department of Toxic Substances Control (DTSC) conducted a background study of arsenic at school sites in the Los Angeles Unified School District that found that concentrations generally below approximately 6 mg/kg represent background conditions (DTSC 2005). In San Diego County, background arsenic concentrations can be as high as 11 mg/kg (URS, 2010). DTSC typically requires further action if arsenic concentrations are generally above 15 to 20 mg/kg. Attachment 8 provides the calculation sheet for the removal volumes and sediment pollutant loading estimates.

It should be noted that due to the lack of dry weather flow and presence of only limited existing vegetation in the SG and Pilot Channels, the general outcome of the activities

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

EXISTING CONDITIONS

conducted for this IWQA provide an estimate of the benefit of sediment removal. Loss of temporary sorption/retention capacity (impact) of vegetation and sediment removal by the proposed maintenance activity is not present. The current channel conditions do not allow for significant natural pollutant load removal in dry weather. Accordingly, based on evaluation of the criteria outlined in the SOP, evaluation of existing and estimated recovery conditions, and using best professional judgment, the proposed maintenance activities will provide an overall pollutant reduction benefit. This outcome is based on the fact that sediment (and associated pollutant) removal is greater than the estimated loss of temporary sorption/retention capacity (benefit>impact) in the SG and Pilot Channels.

MAINTENANCE IMPACTS

Evaluation of Benefits/Impacts:

Are there constituents that have potential impacts greater than benefits?

YES

NO

If so, identify constituents here and compare measured concentrations to thresholds.

As described above, the IWQA is intended to serve as a framework for evaluating pollutant reduction potential and water quality benefits due to sediment removal (potential water quality benefit for implementing channel maintenance activities) in comparison with the estimated loss of temporary pollutant sorption/retention capacity as a result of channel maintenance (potential water quality impacts associated with channel maintenance activities). Given the presence of the dry weather diversion upstream of the SG Channel and general lack of flowing water within the SG and Pilot Channels, there is no estimated loss of temporary pollutant sorption/retention capacity as a result of channel maintenance activities in these channels. Additionally, there is pollutant reduction benefit due to sediment (and associated pollutant) removal as a result of the proposed maintenance activities.

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

MITIGATION

Conclusion/Recommendations (Describe the limits of recommended maintenance, degree to which native vegetation within the facility can be retained, and capacity of maintained channel):

IWQA procedures under the MMP provide a methodology for a water quality management model to evaluate potential water quality benefits and impacts associated with channel maintenance activities. Current site conditions (lack of dry weather low flows) in the Pilot Channel and SG Channel do not meet the implementation criteria set forth in the PEIR's Water Quality Assessment –White Paper. Accordingly, the City modified sampling and analysis procedures to quantify the potential water quality benefits of channel maintenance activities related to sediment and non-native vegetation removal. The results of the IWQA process shows there is no estimated loss of temporary pollutant sorption/retention capacity and there is pollutant reduction benefit due to sediment removal as a result of the proposed maintenance activities.

Even given this conclusion, the City has agreed to implement a suite of water quality improvement activities in the Coastal Zone to offset potential effects associated with the proposed project. These activities were required as part of the California Coastal Commission Coastal Development Permit (CDP No. A-6-NOC-11-086). The City proposes to utilize a suite of pollution prevention, source control, and treatment BMPs to address sediment and other pollutant inputs to the SG and Pilot Channel area drainages within the coastal zone (Table 3). The selected activity suite was derived from evaluation of current water quality improvement activities in each drainage area and synthesis of City-wide programmatic findings.

Tijuana River Pilot Channel & Smuggler's Gulch Channel

Appendix D - Individual Water Quality Assessment Report

MITIGATION				
Table 3. Proposed Water Quality Improvement Activities in the SG and Pilot Channel Drainages.				
Priority Channel Area Drainage	Water Quality Activity Type	Description	Implementation Frequency	Duration
Tijuana River	Pollution Prevention	Commercial and residential property sediment reduction outreach distribution.	250 parcels	Approximately one month prior to maintenance initiation.
	Source Control	Street sweeping improvements-targeted vacuum-assisted/regenerative air machine usage.	5.0 -curb miles	One year subsequent to sediment removal maintenance events.
	Source Control	Municipal and bi-national agency collaboration through Tijuana River Valley Recovery Team to address sediment and trash.	Ongoing	Five years.
	Treatment	Enhanced catch basin inspection and as-needed cleaning implementation.	10 inlet locations	One year subsequent to sediment removal maintenance events.
City-wide	Special Study	Evaluate the need and potential effectiveness of implementing slope stabilization measures and small scale water quality basin BMPs on City-owned parcels within the priority channel drainage areas.	To be determined	One year subsequent to sediment removal maintenance event for each priority channel segment.

**Tijuana River Pilot Channel & Smuggler’s Gulch Channel
Appendix D - Individual Water Quality Assessment Report**

MITIGATION				
Table 3. Proposed Water Quality Improvement Activities in the SG and Pilot Channel Drainages (Continued)				
Priority Channel Area Drainage	Water Quality Activity Type	Description	Implementation Frequency	Duration
City-wide	Special Study	Degraded canyon area municipal separate storm sewer (MS4) outfall evaluation and improvement process.	To be determined	One year subsequent to sediment removal maintenance event for one priority channel segment
City-wide	Pilot Implementation Study	Conduct repairs on a prioritized representative degraded outfall to determine the relative level of planning, engineering and implementation effort needed to address identified canyon-area outfall problems.	1 outfall location	Five years.

In addition, the City will be implementing a five year receiving water monitoring plan in accordance with its Clean Water Act Section 401 Water Quality Certification (RWQCB 2012) for the project area. Applicable PEIR mitigation measures can be found in their entirety in Attachment 9. No water quality impacts were identified as a result of maintenance, therefore there are no additional mitigation efforts required by this IWQA.

Attachment 2 of the IMP includes all additional permits and their conditions which must be incorporated.


ADDITIONAL COMMENTS OR RECOMMENDATIONS
<p>The PEIR Water Quality Assessment – White Paper’s Standard <i>Operating Procedures to Conduct Water Quality Assessment and Quantification Model</i> acknowledges that site conditions may require modifications to the procedures. The procedures described in this document were modified from the original SOP based on existing site-specific conditions found in the SG and Pilot Channels.</p>

Tijuana River Pilot Channel & Smuggler's Gulch Channel
Appendix D - Individual Water Quality Assessment Report

REFERENCES	
California Coastal Commission. 2012. Permit Number A-6-NOC-11-086. San Diego, California.	
City of San Diego. 2010. Pilot Channel Borings and Sediment Characterization Report. Document ID# CSD-TM-09-URS09-01.D1.	
City of San Diego. 2011a. Master Storm Water Maintenance Program. San Diego, California: October 2011	
City of San Diego. 2011b. Final Recirculated Master Storm Water System Maintenance Program PEIR. San Diego, California: October 2011.	
California Regional Water Quality Control Board San Diego Region (RWQCB). 2012. Tijuana River Valley Channel Maintenance, Water Quality Certification 09C-077 WDID Number 9000001976.	
California Regional Water Quality Control Board San Diego Region (RWQCB). 1994. Water Quality Control Plan for the San Diego Basin (9).	
URS Corporation for: California Department of Resources Recycling and Recovery. 2010. Report of Trash, Waste Tire and Sediment Characterization Tijuana River Valley. San Diego, California.	

ATTACHMENTS	
Attachment 1	Project Overview Map
Attachment 2	Site Visit Photo Log
Attachment 3	Sediment Sample Boring Logs
Attachment 4	Sediment Sample Grain Size Distribution Curve and Sieve Analyses
Attachment 5	Sediment Sample Chain of Custody Form
Attachment 6	Sediment Sample Constituent List and Results
Attachment 7	Wetland Assessment Scoring Criteria
Attachment 8	Sediment Pollutant Loading Calculations
Attachment 9	Applicable PEIR Mitigation Measures

INTENTIONALLY LEFT BLANK

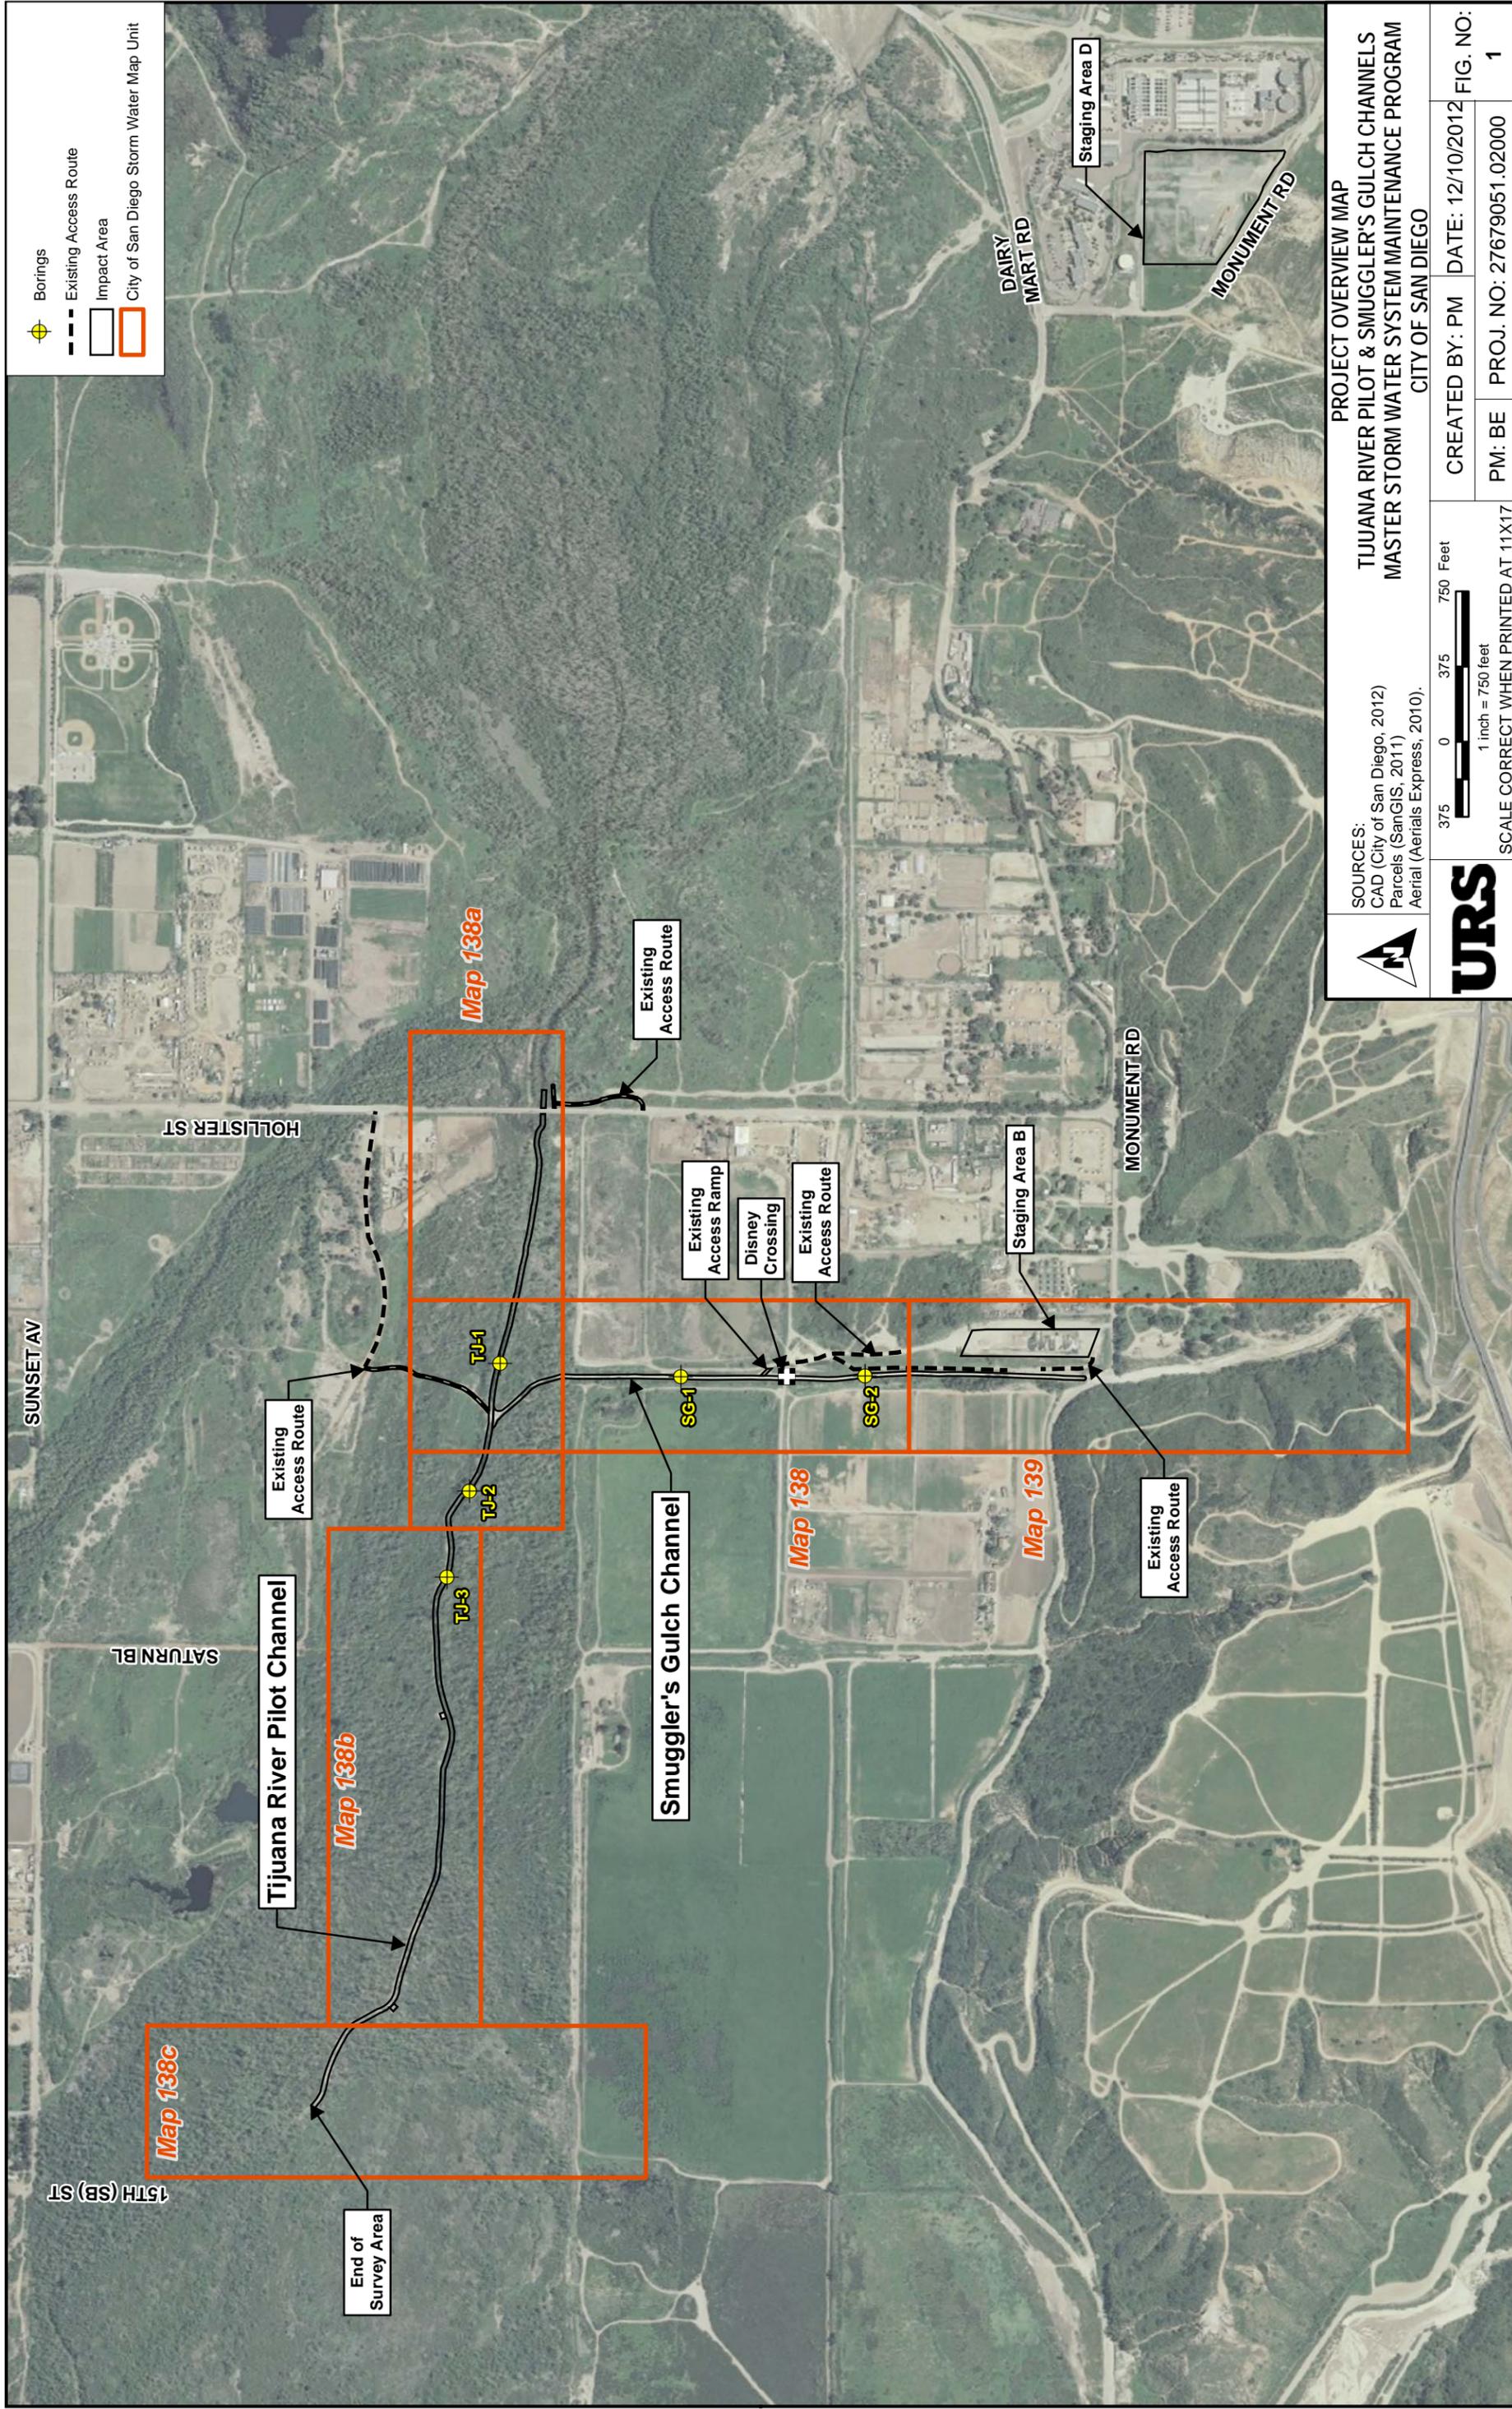

INTENTIONALLY LEFT BLANK

Client Name: City of San Diego, O &M		Site Location: Tijuana Pilot and Smuggler's Gulch Channels	Project No.: 27679954
Photo No.: 1	Date: 11/14/12		
Direction Photo Taken: South			
Description: Existing access route leading South from unnamed road west of Hollister Street to the confluence.			

Photo No.: 2	Date: 11/14/12	
Direction Photo Taken: South		
Description: SG-1 limited access rig sample location. North of Disney Crossing.		

Client Name: City of San Diego, O &M		Site Location: Tijuana Pilot and Smuggler's Gulch Channels	Project No.: 27679954
Photo No.: 3	Date: 11/14/12		
Direction Photo Taken: East			
Description: TJ-1 limited access rig sample location. East of the confluence.			

Photo No.: 4	Date: 11/14/12		
Direction Photo Taken: West			
Description: TJ-2 limited access rig sample location. West of the confluence.			

Client Name: City of San Diego, O &M	Site Location: Tijuana Pilot and Smuggler's Gulch Channels	Project No.: 27679954
--	--	---------------------------------

Photo No. 5	Date: 11/14/12
-----------------------	--------------------------

Direction Photo Taken:

West

Description:

TJ-3 hand auger sample. West of the confluence.



Photo No. 6	Date: 11/14/12
-----------------------	--------------------------

Direction Photo Taken:

Description:

SG-2 sample location. South of Disney Crossing.



Client Name: City of San Diego, O &M	Site Location: Tijuana Pilot and Smuggler's Gulch Channels	Project No.: 27679954
--	--	---------------------------------

Photo No.: 7	Date: 11/14/12
Direction Photo Taken: North	

Description:

Confluence after sampling activities were conducted.



Photo No.: 8	Date: 11/14/12
Direction Photo Taken: West	

Description:

Drum filled with decon water from sampling activities.



Project: T3 River Remediation
 Project Location: T3 River Valley, San Diego
 Project Number: 27679954-04000

Log of Boring SG-1
 Sheet 1 of 1

Date(s) Drilled: 11/14/12	Logged By: A. Avakian	Checked By:
Drilling Method: Hollow Stem Auger	Drill Bit Size/Type: 8" Hollow Stem Auger	Total Depth of Borehole: 3.5 feet
Drill Rig Type: ASV	Drilling Contractor: TCA	Approximate Surface Elevation:
Water Level Depth (Feet): N/A	Sampling Method(s): SPT (Composite) / Bulk	Hammer Data: 14016 / 30" Auto
Borehole Backfill: Cuttings	Location: 32.54942 / 117.08838	

Elevation, feet	Depth, feet	SAMPLES		Graphic Log	MATERIAL DESCRIPTION	Water Content, %	Dry Density, pcf	REMARKS AND OTHER TESTS
		Type	Number					
11	0	□	3/2/4	[Hand-drawn log showing soil profile]	<p>Composite Sample ⇒ SG-1</p> <p>Loose, moist, pale brown, f-c sand, w/ trace f-gravel, f-c SAND (SP) No odor P₁₀ = 0.0 mm</p>			955
			8/4/7					1013
5					<p>TD = 2.5'</p> <p>Bulk Sample Taken From 0' to 1.5'</p> <p>P₁₀ = 0.0 mm</p> <p>□ = SPT drive sample □ = Bulk Sample (Hand Aug)</p> <p>Walls of channel are about 6' to 8' high above middle of channel.</p>			
10								
15								
20								
25								
30								

Project: T3 River Rehabilitation
 Project Location: T3 River Valley, San Diego
 Project Number: 27679954-04000

Log of Boring SG-2
 Sheet 1 of 1

Date(s) Drilled: 11/14/12	Logged By: A. Avalos	Checked By:
Drilling Method: Hand Auger	Drill Bit Size/Type: Hand Auger	Total Depth of Borehole: 2 feet
Drill Rig Type: N/A	Drilling Contractor: T2A	Approximate Surface Elevation:
Water Level Depth (Feet): N/A	Sampling Method(s): Composite Grab Sample	Hammer Data: N/A
Borehole Backfill: Catkins	Location: 32.54707 / 117.08835	

Elevation, feet	Depth, feet	SAMPLES		Graphic Log	MATERIAL DESCRIPTION	Water Content, %	Dry Density, pcf	REMARKS AND OTHER TESTS
		Type	Number					
0	0	SG-2			Moist, pale brown, f.-m. Sand (SP) Trace trash			1245
	5				Moist, pale brown, f.-m. Sand, w/ some silt, soil tightens up at 1' depth (SP)			1245
	10				TD = 2'			
	15				Channel walls are about 10' +/- 2' high above middle of channel.			
	20				☒ = Composite Grab Sample Taken From Hand Auger			
	25							
	30							

Report: GEO_10_SNA: File: TEMP2.GPJ: 6/3/2008 e-



Project: TJ River Penetration	Log of Boring TJ-1 Sheet 1 of 1
Project Location: TJ River Valley, San Diego	
Project Number: 27679954.04000	

Date(s) Drilled: 11/14/12	Logged By: D. Avatica	Checked By:
Drilling Method: Hollow Stem Auger	Drill Bit Size/Type: 8" Hollow Stem Auger	Total Depth of Borehole: 5 feet
Drill Rig Type: ASU	Drilling Contractor: TLD	Approximate Surface Elevation:
Water Level Depth (Feet): N/A	Sampling Method(s): SPT	Hammer Data: 14211/30" Auto
Borehole Backfill: Cuttings	Location: 32.55209 / 117.08838	

Elevation, feet	Depth, feet	SAMPLES		Graphic Log	MATERIAL DESCRIPTION	Water Content, %	Dry Density, pcf	REMARKS AND OTHER TESTS
		Type	Number					
0	0				Loose, moist, pale brown, Silty of SAND (SM)			1320
			1/2/13/13					
			2/2/13/13		Trace trash			
			2/4		Thin clay layer in end of shoe			
5	5							1350
					TJ-1 (Composite Sample) VD = 5'			
					PI = 0.0 pm			
					Channel walls are about 2' to 3' above middle of channel.			
					□ = SPT Drive Sample			
10	10							
15	15							
20	20							
25	25							
30	30							

Report: GEO_10_SNA; File: TEMP2.GPJ; 6/2/2008 B-



Project: *TJ River Remediation*
 Project Location: *TJ River Valley, San Diego*
 Project Number: *27679954-04000*

Log of Boring TJ-2

Sheet 1 of 1

Date(s) Drilled <i>11/14/12</i>	Logged By <i>A. Avetian</i>	Checked By
Drilling Method <i>Hollow Stem Auger</i>	Drill Bit Size/Type <i>8" Hollow Stem Auger</i>	Total Depth of Borehole <i>5.0 feet</i>
Drill Rig Type <i>ASV</i>	Drilling Contractor <i>TCA</i>	Approximate Surface Elevation
Water Level Depth (Feet) <i>N/A</i>	Sampling Method(s) <i>SPT</i>	Hammer Data <i>14011/30" Auto</i>
Borehole Backfill <i>Cuttings</i>	Location <i>32.55238 / 117.09019</i>	

Elevation, feet	SAMPLES			Graphic Log	MATERIAL DESCRIPTION	Water Content, %	Dry Density, pcf	REMARKS AND OTHER TESTS	
	Depth, feet	Type	Blows per foot						
<i>TJ-2</i> <i>Bulk</i>	0		<i>1/2/2 3</i> <i>3/1/3/2</i> <i>3/2</i>	<i>TJ-2 (Composite Sample)</i>	<i>Loose, moist, pale brown, silty of. Sand, trace organic fragments, silty sand (SM)</i> <i>NDA = 0.0 ppm</i>			<i>1100</i>	
	5								<i>1125</i>
	10								
15									
20					<i>- Bulk Sample Collected From 0' to 1.5' depth.</i>				
25					<i>- Channel Walls are 5' to 6' high above middle of channel.</i>				
30									

Report: GEO_10_SNA; File: TEMP2.GPJ; 6/3/2008 B.

Project: TJ River Remediation	Log of Boring TJ-3 Sheet 1 of 1
Project Location: TJ River Valley, San Diego	
Project Number: 27679954.04000	

Date(s) Drilled: 11/14/12	Logged By: A. Aronson	Checked By:
Drilling Method: Hand Auger	Drill Bit Size/Type: N/A	Total Depth of Borehole: 5 feet
Drill Rig Type: N/A	Drilling Contractor: TJ	Approximate Surface Elevation:
Water Level Depth (Feet): N/A	Sampling Method(s):	Hammer Data: N/A
Borehole Backfill: Cuttings	Location: 32.55264 / 117.09156	


Elevation, feet	SAMPLES			Graphic Log	MATERIAL DESCRIPTION	Water Content, %	Dry Density, pcf	REMARKS AND OTHER TESTS
	Depth, feet	Type	Number					
0					0-1" Mud			
0-5					Moist, light olive brown, Silty wf. Sand (SM) → Organic odor at 2.5' w/ grey/black stains 3-5' Moist, pale brown, fine sand, w/ some interbedded zones of silty/clay and organic odor + dark grey stain moderate			PTD = 0.0 pm 1415
5					TD = 5'			
15					☒ = Composite Grab Sample Take from Hand Auger			
20					Channel walls are about 4' above middle of channel.			
25								
30								

Report: GEO_10_SNA; File: TEMP2.GPJ; 6/3/2008 B-



GRAVEL	SAND		SILT	CLAY
	MEDIUM TO COARSE	FINE		
	U.S. Standard Sieve Sizes			

PERCENT PASSING BY WEIGHT

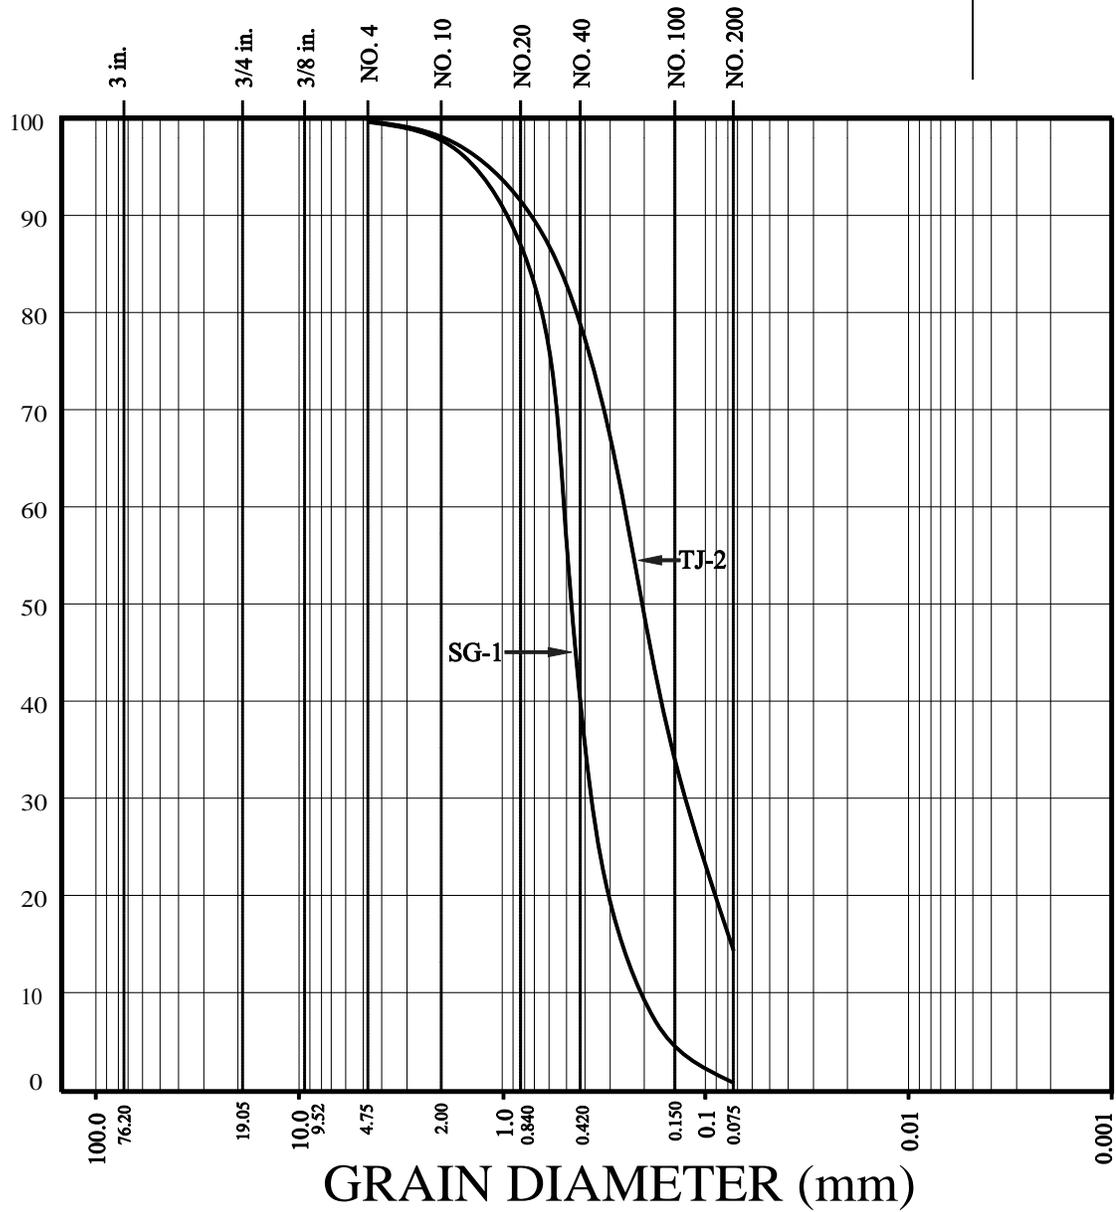

SAMPLE	UNIFIED SOIL CLASSIFICATION
1- SG-1	SILTY SAND (SM) WITH GRAVEL
2- TJ-2	SILTY SAND (SM) WITH GRAVEL

SAMPLE	UNIFIED SOIL CLASSIFICATION

GEOCON
WEST, INC.



ENVIRONMENTAL GEOTECHNICAL MATERIALS
3303 N. SAN FERNANDO BLVD. - SUITE 100 - BURBANK, CA 91504
PHONE (818) 841-8388 - FAX (818) 841-1704

RG	8000
----	------

GRAIN SIZE DISTRIBUTION

PAT-CHEM LABORATORIES
TJ RIVER VALLEY

NOV. 19, 2012	PROJECT NO. A8798-06-01	FIG. 1
---------------	-------------------------	--------



Project Name: Pat-Chem Laboratories Sampled By: - Date: 11/15/12
 Project No.: A8798-06-01 Tested By: CC Date: 11/16/2012
 Location: - Engineer/ Geologist: Gerry
 Sample No.: SG-1 Depth: -
 Soil Description: Light Yellowish Brown Silty Sand with Gravel

Total Wet Weight in Use with Tare	441.8
Total Dry Weight in Use with Tare	432.90
Moisture Content	2.64%
Container Number	Pan 5
Container Weight	95.6
Dry Weight After 200 Washed with Tare	430.5
Total Dry Weight of Sample	337.30

U.S. SIEVE SIZE	CUMULATIVE WEIGHT RETAINED			
	Accumulative	Wegiht	% Retained	% Passing
3"	0.0		0.00%	100.00%
2"	0.0		0.00%	100.00%
1½"	0.0		0.00%	100.00%
1"	0.0		0.00%	100.00%
¾"	0.0		0.00%	100.00%
½"	0.0		0.00%	100.00%
⅜"	0.0		0.00%	100.00%
No. 4 ✓	1.2		0.36%	99.64%
No. 10 ✓	5.0		1.48%	98.52%
No. 20 ✓	36.5		10.82%	89.18%
No. 40 ✓	191.6		56.80%	43.20%
No. 60	288.0		85.38%	14.62%
No. 100 ✓	321.9		95.43%	4.57%
No. 140	329.8		97.78%	2.22%
No. 200 ✓	334.8		99.26%	0.74%
Pan	334.9		99.29%	0.71%



Project Name: Pat-Chem Laboratories Sampled By: - Date: 11/15/12
 Project No.: A8798-06-01 Tested By: CC Date: 11/16/2012
 Location: - Engineer/ Geologist: Gerry
 Sample No.: TJ-2 Depth: -
 Soil Description: Yellowish Brown Silty Sand with Gravel and Organic

Total Wet Weight in Use with Tare	329.2
Total Dry Weight in Use with Tare	311.83
Moisture Content	8.04%
Container Number	Pan 14
Container Weight	95.9
Dry Weight After 200 Washed with Tare	281.1
Total Dry Weight of Sample	215.93

U.S. SIEVE SIZE	CUMULATIVE WEIGHT RETAINED			
	Accumulative	Wegiht	% Retained	% Passing
3"	0.0		0.00%	100.00%
2"	0.0		0.00%	100.00%
1½"	0.0		0.00%	100.00%
1"	0.0		0.00%	100.00%
¾"	0.0		0.00%	100.00%
½"	0.0		0.00%	100.00%
⅜"	0.7		0.32%	99.68%
No. 4	4.1		1.90%	98.10%
No. 10	13.8		6.39%	93.61%
No. 20	20.1		9.31%	90.69%
No. 40	45.6		21.12%	78.88%
No. 60	101.5		47.01%	52.99%
No. 100	142.0		65.76%	34.24%
No. 140	169.1		78.31%	21.69%
No. 200	185.0		85.68%	14.32%
Pan	185.2		85.77%	14.23%

Pat-Chem Laboratories
 11990 Discovery Court
 Moorpark, CA 93021

CHAIN OF CUSTODY RECORD

Phone (805) 532-0012
 Fax (805) 532-0016

Sample I.D.#: _____

Customer Name <i>URS Corporation</i>		P.O.# <i>27679954</i>		Project Location <i>TS River Valley</i>					
Address <i>4225 Executive Square</i>		Phone # <i>858-812-9292</i>		Sampled by <i>Adam Avakian</i>					
City, State, Zip <i>LA Tolla 92037</i>		Report Attention <i>bryn.evans@urs.com, elizabeth.chilman@urs.com,</i>		<i>adam.avakian@urs.com</i>					
Lab #	Date Sampled	Time Sampled	Comp or Grab	Type **see below	SAMPLE DESCRIPTION	No. Rec.	Required Tests	Preservatives	Bottle Type
	<i>11/14/12</i>	<i>1013</i>	<i>Comp</i>	<i>So</i>	<i>SG-1</i>	<i>2</i>	<i>See Work Order</i>	<i>None</i>	<i>Glass Jar</i>
		<i>1245</i>	<i>Comp</i>		<i>SG-2</i>		<i>or Contact Liz</i>		
		<i>1350</i>	<i>Comp</i>		<i>TS-1</i>		<i>Chilman or Bryn</i>		
		<i>1125</i>	<i>Comp</i>		<i>TS-2</i>		<i>Event at 858-812-9292</i>		
		<i>1415</i>	<i>Comp</i>		<i>TS-3</i>				
<i>* Samples are going to different lab for sieve analysis.</i>									
	<i>11/14/12</i>	<i>1430</i>	<i>Comp</i>	<i>So</i>	<i>TS-2 Bulk</i>	<i>2</i>		<i>None</i>	<i>5 gal bucket</i>
	<i>11/14/12</i>	<i>1450</i>	<i>Comp</i>	<i>So</i>	<i>SG-1 Bulk</i>	<i>2</i>		<i>None</i>	<i>5 gal bucket</i>


Signature _____ pH: _____
 Received by _____ Temperature: _____
 Relinquished by _____ Initial Flow: _____
 Received by _____ Final Flow: _____
 Relinquished by _____

** Type: AQ = aqueous NA = Nonaqueous SL = Sludge
 SO = Soil PE = Petroleum OT = Other
 Note: Samples are discarded 30 days after results are reported, unless other arrangements are made.
 Hazardous samples will be returned to client, or disposed at the CLIENTS expense.

Composite Sampler Setup Date: / / Composite Sampler Setup Time: :

Analytical Results for Sediment Sampling Activities

Constituent	EPA Method	Detection Limit	Reporting Limit	Result				Human Health		
				SG-1	SG-2	TJ-1	TJ-2	Residential	Commercial/Industrial	Units
General Physical										
% Solids	% calculation	-	-	97.0	97.0	94.0	96.0	%	-	-
Inorganic Non-Metals										
Nitrate as N	EPA 300.0	0.2	0.5	10.7	0.9	23.7	21.2	mg/kg	130,000	1,600,000
Nitrite as N	EPA 300.0	0.2	0.5	<0.5	<0.5	<0.5	<0.5	mg/kg	7,800	100,000
Total Kjeldahl Nitrogen	EPA 351.2	0.9	1.0	31	210	220	130	mg/kg	-	-
Phosphorus, Total as P	EPA 365.4	0.5	1.0	103	165	363	316	mg/kg	-	-
Organics										
Chlorpyrifos	EPA 8141	24.4	50.0	<50.0	<50.0	<50.0	<50.0	ug/kg	61	620
Diazinon	EPA 8141	29.8	50.0	<50.0	<50.0	<50.0	<50.0	ug/kg	43	430
Malathion	EPA 8141	22.6	50.0	<50.0	<50.0	<50.0	<50.0	ug/kg	1,200	12,000
Metals										
Antimony	EPA 6010B	0.4	1.0	<1.0	<1.0	<1.0	<1.0	mg/kg	30	3,800
Arsenic	EPA 6010B	0.8	1.0	1.9	2.9	4.8	3.5	mg/kg	0.07	0.24
Cadmium	EPA 6010B	0.4	1.0	<1.0	<1.0	<1.0	<1.0	mg/kg	1.7	7.5
Chromium	EPA 6010B	0.3	1.0	4.1	13	9.2	8.9	mg/kg	100,000	100,000
Copper	EPA 6010B	0.4	1.0	2.9	10	7.5	7.1	mg/kg	3,000	38,000
Lead	EPA 6010B	0.4	1.0	15	2.8	3.1	5.0	mg/kg	80	320
Manganese	EPA 6010B	0.5	1.0	65	55	110	99	mg/kg	1,800	18,000
Nickel	EPA 6010B	0.4	1.0	2.8	4.7	6.0	5.8	mg/kg	1,600	16,000
Selenium	EPA 6010B	1.0	1.0	<1.0	<1.0	<1.0	<1.0	mg/kg	380	4,800
Zinc	EPA 6010B	0.6	1.0	14	23	38	31	mg/kg	23,000	100,000
OCP										
Tetrachloro-m-xylene	EPA 8081A	-	-	312	228	288	230	ug/kg	-	-
Decachlorobiphenyl	EPA 8081A	-	-	360	258	318	225	ug/kg	-	-
1,3-Dimethyl-2-nitrobenzene	EPA 8141	-	-	1920	1820	1660	1850	ug/kg	-	-

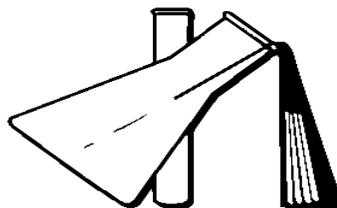

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 1 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
SG-1 (Sample I.D.# : 1211169-01) Collected: 14-Nov-12 By A.Avakian						
Arsenic	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	1.9 mg/kg	
Cadmium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	< 1.0 mg/kg	
Chromium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	4.1 mg/kg	
Copper	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	2.9 mg/kg	
Manganese	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	65 mg/kg	
Nickel	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	2.8 mg/kg	
Lead	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	15 mg/kg	
Antimony	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	< 1.0 mg/kg	
Selenium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	< 1.0 mg/kg	
Zinc	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	14 mg/kg	
Alpha-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Beta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Gamma-BHC(Lindane)	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Delta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Heptachlor	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Aldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Heptachlor Epoxide	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Gamma-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endosulfan I	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Alpha-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
4,4'-DDE	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Dieldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endosulfan II	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
4,4'-DDD	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endrin Aldehyde	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endosulfan Sulfate	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
4,4'-DDT	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endrin Ketone	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Methoxychlor	EPA 8081A	AK21623	16.7	17-Nov-12 (SM)	< 16.7 ug/kg	
Chlordane	EPA 8081A	AK21623	167	17-Nov-12 (SM)	< 167 ug/kg	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

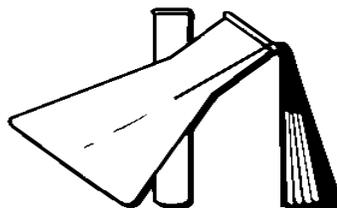

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 2 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
SG-1 (Sample I.D.# : 1211169-01) Collected: 14-Nov-12 By A.Avakian						
Toxaphene	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
Surrogate: Tetrachloro-m-xylene	EPA 8081A	AK21623		17-Nov-12 (SM)		93.5 % (22-120)
Surrogate: Decachlorobiphenyl	EPA 8081A	AK21623		17-Nov-12 (SM)		108 % (27-103)
Azinphos methyl	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Bolstar	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Chlorpyrifos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Coumaphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-o	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-s	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Diazinon	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dichlorvos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dimethoate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Disulfoton	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
EPN	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ethoprop	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fensulfothion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fenthion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Malathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Merphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Mevinphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Naled	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Methyl parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Phorate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ronnel	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Stirophos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Sulfotep	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
TEPP	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Tokuthion (Prothiofos)	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Trichloronate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Surrogate: 1,3-Dimethyl-2-nitrobenze.	EPA 8141	AK21625		17-Nov-12 (SJ)		57.7 % (30-120)

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

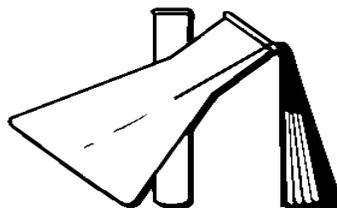

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 3 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
SG-1 (Sample I.D.# : 1211169-01) Collected: 14-Nov-12 By A.Avakian						
Phosphorus, Total as P	EPA 365.4	AK21613	1.0	16-Nov-12 (CS)	103 mg/kg	
% Solids	% calculation	AK21620		16-Nov-12 (EA)	97.0 %	
Total Kjeldahl Nitrogen	EPA 351.2	AK21603	1.0	16-Nov-12 (JG)	31 mg/kg	
Nitrate as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)	10.7 mg/kg	
Nitrite as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)	< 0.5 mg/kg	
SG-2 (Sample I.D.# : 1211169-02) Collected: 14-Nov-12 By A.Avakian						
Arsenic	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	2.9 mg/kg	
Cadmium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	< 1.0 mg/kg	
Chromium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	13 mg/kg	
Copper	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	10 mg/kg	
Manganese	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	55 mg/kg	
Nickel	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	4.7 mg/kg	
Lead	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	2.8 mg/kg	
Antimony	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	< 1.0 mg/kg	
Selenium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	< 1.0 mg/kg	
Zinc	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	23 mg/kg	
Alpha-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Beta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Gamma-BHC(Lindane)	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Delta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Heptachlor	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Aldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Heptachlor Epoxide	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Gamma-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endosulfan I	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Alpha-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
4,4'-DDE	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Dieldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
Endosulfan II	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	
4,4'-DDD	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	< 3.3 ug/kg	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

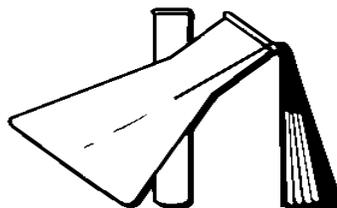

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 4 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
SG-2 (Sample I.D.# : 1211169-02) Collected: 14-Nov-12 By A.Avakian						
Endrin Aldehyde	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan Sulfate	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDT	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin Ketone	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Methoxychlor	EPA 8081A	AK21623	16.7	17-Nov-12 (SM)	<	16.7 ug/kg
Chlordane	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
Toxaphene	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
Surrogate: Tetrachloro-m-xylene	EPA 8081A	AK21623		17-Nov-12 (SM)		68.5 % (22-120)
Surrogate: Decachlorobiphenyl	EPA 8081A	AK21623		17-Nov-12 (SM)		77.5 % (27-103)
Azinphos methyl	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Bolstar	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Chlorpyrifos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Coumaphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-o	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-s	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Diazinon	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dichlorvos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dimethoate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Disulfoton	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
EPN	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ethoprop	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fensulfothion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fenthion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Malathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Merphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Mevinphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Naled	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Methyl parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Phorate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ronnel	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

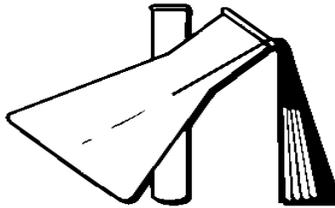

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 5 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
SG-2 (Sample I.D.# : 1211169-02) Collected: 14-Nov-12 By A.Avakian						
Stiophos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Sulfotep	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
TEPP	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Tokuthion (Prothiofos)	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Trichloronate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Surrogate: 1,3-Dimethyl-2-nitrobenze.	EPA 8141	AK21625		17-Nov-12 (SJ)		54.5 % (30-120)
Phosphorus, Total as P	EPA 365.4	AK21613	1.0	16-Nov-12 (CS)		165 mg/kg
% Solids	% calculation	AK21620		16-Nov-12 (EA)		97.0 %
Total Kjeldahl Nitrogen	EPA 351.2	AK21603	1.0	16-Nov-12 (JG)		210 mg/kg
Nitrate as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)		0.9 mg/kg
Nitrite as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)	<	0.5 mg/kg
TJ-1 (Sample I.D.# : 1211169-03) Collected: 14-Nov-12 By A.Avakian						
Arsenic	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		4.8 mg/kg
Cadmium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	<	1.0 mg/kg
Chromium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		9.2 mg/kg
Copper	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		7.5 mg/kg
Manganese	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		110 mg/kg
Nickel	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		6.0 mg/kg
Lead	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		3.1 mg/kg
Antimony	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	<	1.0 mg/kg
Selenium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	<	1.0 mg/kg
Zinc	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		38 mg/kg
Alpha-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Beta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Gamma-BHC(Lindane)	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Delta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Heptachlor	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Aldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Heptachlor Epoxide	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Gamma-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan I	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

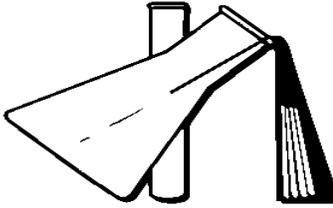

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 6 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
TJ-1 (Sample I.D.# : 1211169-03) Collected: 14-Nov-12 By A.Avakian						
Alpha-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDE	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Dieldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan II	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDD	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin Aldehyde	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan Sulfate	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDT	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin Ketone	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Methoxychlor	EPA 8081A	AK21623	16.7	17-Nov-12 (SM)	<	16.7 ug/kg
Chlordane	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
Toxaphene	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
<i>Surrogate: Tetrachloro-m-xylene</i>	<i>EPA 8081A</i>	<i>AK21623</i>		<i>17-Nov-12 (SM)</i>		<i>86.5 % (22-120)</i>
<i>Surrogate: Decachlorobiphenyl</i>	<i>EPA 8081A</i>	<i>AK21623</i>		<i>17-Nov-12 (SM)</i>		<i>95.5 % (27-103)</i>
Azinphos methyl	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Bolstar	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Chlorpyrifos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Coumaphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-o	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-s	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Diazinon	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dichlorvos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dimethoate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Disulfoton	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
EPN	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ethoprop	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fensulfothion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fenthion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Malathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Merphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

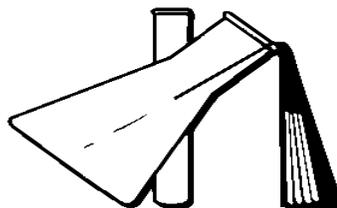

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 7 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
TJ-1 (Sample I.D.# : 1211169-03) Collected: 14-Nov-12 By A.Avakian						
Mevinphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Naled	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Methyl parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Phorate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ronnel	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Stirophos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Sulfotep	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
TEPP	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Tokuthion (Prothiofos)	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Trichloronate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Surrogate: 1,3-Dimethyl-2-nitrobenze.	EPA 8141	AK21625		17-Nov-12 (SJ)		49.9 % (30-120)
Phosphorus, Total as P	EPA 365.4	AK21613	1.0	16-Nov-12 (CS)		363 mg/kg
% Solids	% calculation	AK21620		16-Nov-12 (EA)		94.0 %
Total Kjeldahl Nitrogen	EPA 351.2	AK21603	1.0	16-Nov-12 (JG)		220 mg/kg
Nitrate as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)		23.7 mg/kg
Nitrite as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)	<	0.5 mg/kg
TJ-2 (Sample I.D.# : 1211169-04) Collected: 14-Nov-12 By A.Avakian						
Arsenic	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		3.5 mg/kg
Cadmium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	<	1.0 mg/kg
Chromium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		8.9 mg/kg
Copper	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		7.1 mg/kg
Manganese	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		99 mg/kg
Nickel	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		5.8 mg/kg
Lead	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		5.0 mg/kg
Antimony	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	<	1.0 mg/kg
Selenium	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)	<	1.0 mg/kg
Zinc	EPA 6010B	AK21606	1.0	16-Nov-12 (AF)		31 mg/kg

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

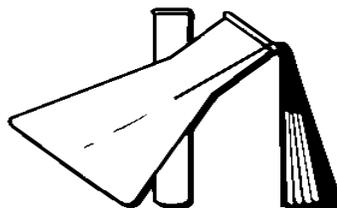

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 8 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
TJ-2 (Sample I.D.# : 1211169-04) Collected: 14-Nov-12 By A.Avakian						
Alpha-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Beta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Gamma-BHC(Lindane)	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Delta-BHC	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Heptachlor	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Aldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Heptachlor Epoxide	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Gamma-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan I	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Alpha-Chlordane	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDE	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Dieldrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan II	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDD	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin Aldehyde	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endosulfan Sulfate	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
4,4'-DDT	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Endrin Ketone	EPA 8081A	AK21623	3.3	17-Nov-12 (SM)	<	3.3 ug/kg
Methoxychlor	EPA 8081A	AK21623	16.7	17-Nov-12 (SM)	<	16.7 ug/kg
Chlordane	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
Toxaphene	EPA 8081A	AK21623	167	17-Nov-12 (SM)	<	167 ug/kg
<i>Surrogate: Tetrachloro-m-xylene</i>	<i>EPA 8081A</i>	<i>AK21623</i>		<i>17-Nov-12 (SM)</i>		<i>69.0 % (22-120)</i>
<i>Surrogate: Decachlorobiphenyl</i>	<i>EPA 8081A</i>	<i>AK21623</i>		<i>17-Nov-12 (SM)</i>		<i>67.5 % (27-103)</i>
Azinphos methyl	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Bolstar	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Chlorpyrifos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Coumaphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-o	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Demeton-s	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Diazinon	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

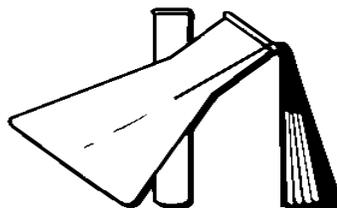

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 9 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley


Project/P.O.#: 27679954

PARAMETER	METHOD	QC BATCH	REPORTING LIMIT	ANALYZED (ANALYST)	RESULT	NOTE
TJ-2 (Sample I.D.# : 1211169-04) Collected: 14-Nov-12 By A.Avakian						
Dichlorvos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Dimethoate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Disulfoton	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
EPN	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ethoprop	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fensulfothion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Fenthion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Malathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Merphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Mevinphos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Naled	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Methyl parathion	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Phorate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Ronnel	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Stirophos	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Sulfotep	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
TEPP	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Tokuthion (Prothiofos)	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Trichloronate	EPA 8141	AK21625	50.0	17-Nov-12 (SJ)	<	50.0 ug/kg
Surrogate: 1,3-Dimethyl-2-nitrobenze.	EPA 8141	AK21625		17-Nov-12 (SJ)		55.6 % (30-120)
Phosphorus, Total as P	EPA 365.4	AK21613	1.0	16-Nov-12 (CS)		316 mg/kg
% Solids	% calculation	AK21620		16-Nov-12 (EA)		96.0 %
Total Kjeldahl Nitrogen	EPA 351.2	AK21603	1.0	16-Nov-12 (JG)		130 mg/kg
Nitrate as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)		21.2 mg/kg
Nitrite as N	EPA 300.0	AK21621	0.5	16-Nov-12 (JG)	<	0.5 mg/kg

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

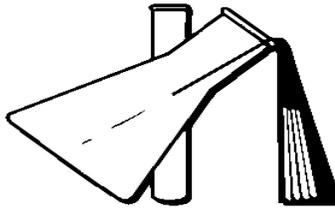

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 10 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954

Metals by EPA 6000/7000 Series Methods - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Note
-----------	--------	------------	-------	-------------	---------------	------	-------------	-----	-----------	------

Batch AK21606 - EPA 3050B

Blank (AK21606-BLK1)

Prepared & Analyzed: 16-Nov-12

Nickel	ND	1.0	mg/kg							
Chromium	ND	1.0	"							
Manganese	ND	1.0	"							
Lead	ND	1.0	"							
Antimony	ND	1.0	"							
Copper	ND	1.0	"							
Cadmium	ND	1.0	"							
Selenium	ND	1.0	"							
Zinc	ND	1.0	"							
Arsenic	ND	1.0	"							

LCS (AK21606-BS1)

Prepared & Analyzed: 16-Nov-12

Nickel	25.1	1.0	mg/kg	25.0		100	80-120			
Selenium	21.4	1.0	"	25.0		85.6	80-120			
Cadmium	25.2	1.0	"	25.0		101	80-120			
Lead	24.9	1.0	"	25.0		99.6	80-120			
Manganese	25.1	1.0	"	25.0		100	80-120			
Zinc	23.7	1.0	"	25.0		94.7	80-120			
Copper	25.8	1.0	"	25.0		103	80-120			
Chromium	24.7	1.0	"	25.0		98.7	80-120			
Antimony	24.3	1.0	"	25.0		97.0	80-120			
Arsenic	22.5	1.0	"	25.0		89.9	80-120			

LCS Dup (AK21606-BSD1)


Prepared & Analyzed: 16-Nov-12

Selenium	22.0	1.0	mg/kg	25.0		88.1	80-120	2.89	20	
Zinc	23.3	1.0	"	25.0		93.2	80-120	1.54	20	
Arsenic	23.0	1.0	"	25.0		91.8	80-120	2.16	20	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

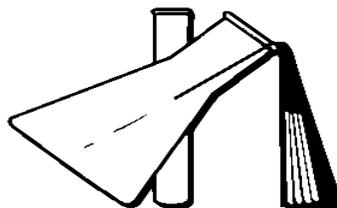

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 11 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954


Metals by EPA 6000/7000 Series Methods - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Note
Batch AK21606 - EPA 3050B										
LCS Dup (AK21606-BSD1)				Prepared & Analyzed: 16-Nov-12						
Cadmium	25.1	1.0	"	25.0	101	80-120	0.170	20		
Manganese	24.8	1.0	"	25.0	99.1	80-120	1.33	20		
Copper	26.0	1.0	"	25.0	104	80-120	0.716	20		
Antimony	24.0	1.0	"	25.0	95.8	80-120	1.25	20		
Lead	24.5	1.0	"	25.0	98.1	80-120	1.55	20		
Nickel	24.6	1.0	"	25.0	98.5	80-120	1.96	20		
Chromium	24.5	1.0	"	25.0	98.2	80-120	0.595	20		
Duplicate (AK21606-DUP1)		Source: 1211169-01			Prepared & Analyzed: 16-Nov-12					
Chromium	4.34	1.0	mg/kg	4.07			6.48	20		
Copper	2.85	1.0	"	2.87			0.907	20		
Cadmium	ND	1.0	"	ND				20		
Antimony	ND	1.0	"	ND				20		
Selenium	ND	1.0	"	ND				20		
Manganese	61.0	1.0	"	65.1			6.54	20		
Nickel	2.97	1.0	"	2.77			6.99	20		
Lead	16.0	1.0	"	15.0			6.19	20		
Arsenic	1.08	1.0	"	1.88			54.1	20		QR-04
Zinc	15.0	1.0	"	14.4			4.17	20		
Matrix Spike (AK21606-MS1)		Source: 1211169-01			Prepared & Analyzed: 16-Nov-12					
Nickel	120	1.0	mg/kg	125	2.77	94.1	75-125			
Lead	119	1.0	"	125	15.0	82.9	75-125			
Manganese	162	1.0	"	125	65.1	77.7	75-125			
Antimony	113	1.0	"	125	ND	90.3	75-125			
Arsenic	106	1.0	"	125	1.88	82.9	75-125			
Copper	122	1.0	"	125	2.87	95.0	75-125			

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

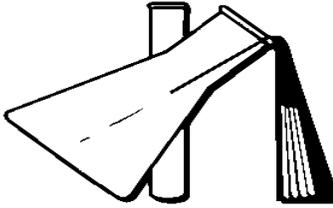

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 12 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954


Metals by EPA 6000/7000 Series Methods - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Note
Batch AK21606 - EPA 3050B										
Matrix Spike (AK21606-MS1)			Source: 1211169-01		Prepared & Analyzed: 16-Nov-12					
Chromium	123	1.0	"	125	4.07	94.8	75-125			
Zinc	128	1.0	"	125	14.4	91.0	75-125			
Selenium	87.1	1.0	"	125	ND	69.7	75-125			QM-05
Cadmium	120	1.0	"	125	ND	95.7	75-125			
Matrix Spike Dup (AK21606-MSD1)			Source: 1211169-01		Prepared & Analyzed: 16-Nov-12					
Nickel	118	1.0	mg/kg	125	2.77	92.2	75-125	1.97	20	
Chromium	121	1.0	"	125	4.07	93.3	75-125	1.53	20	
Zinc	128	1.0	"	125	14.4	90.9	75-125	0.0793	20	
Selenium	86.0	1.0	"	125	ND	68.8	75-125	1.29	20	QM-05
Cadmium	117	1.0	"	125	ND	93.9	75-125	1.91	20	
Copper	122	1.0	"	125	2.87	95.1	75-125	0.101	20	
Lead	117	1.0	"	125	15.0	81.2	75-125	1.78	20	
Antimony	111	1.0	"	125	ND	88.4	75-125	2.07	20	
Manganese	169	1.0	"	125	65.1	82.9	75-125	3.96	20	
Arsenic	104	1.0	"	125	1.88	81.8	75-125	1.42	20	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

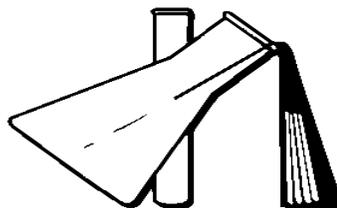

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 13 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954

Organochlorine Pesticides by EPA Method 8081 - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC %REC	%REC Limits	RPD RPD	RPD Limit	Note
-----------	--------	------------	-------	-------------	---------------	-----------	-------------	---------	-----------	------

Batch AK21623 - Solvent Extraction

Blank (AK21623-BLK1)

Prepared: 16-Nov-12 Analyzed: 17-Nov-12

Surrogate: Tetrachloro-m-xylene	31.8		ug/kg	50.0		63.5	22-120			
Surrogate: Decachlorobiphenyl	32.5		"	50.0		65.0	27-103			
Alpha-BHC	ND	0.5	"							
Beta-BHC	ND	0.5	"							
Gamma-BHC(Lindane)	ND	0.5	"							
Delta-BHC	ND	0.5	"							
Heptachlor	ND	0.5	"							
Aldrin	ND	0.5	"							
Heptachlor Epoxide	ND	0.5	"							
Gamma-Chlordane	ND	0.5	"							
Endosulfan I	ND	0.5	"							
Alpha-Chlordane	ND	0.5	"							
4,4'-DDE	ND	0.5	"							
Dieldrin	ND	0.5	"							
Endrin	ND	0.5	"							
Endosulfan II	ND	0.5	"							
4,4'-DDD	ND	0.5	"							
Endrin Aldehyde	ND	0.5	"							
Endosulfan Sulfate	ND	0.5	"							
4,4'-DDT	ND	0.5	"							
Endrin Ketone	ND	0.5	"							
Methoxychlor	ND	2.5	"							
Chlordane	ND	25.0	"							
Toxaphene	ND	25.0	"							


LCS (AK21623-BS1)

Prepared: 16-Nov-12 Analyzed: 17-Nov-12

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

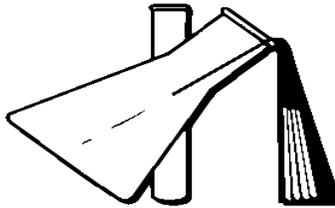

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 14 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954

Organochlorine Pesticides by EPA Method 8081 - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC %REC	Limits	RPD	RPD Limit	Note
-----------	--------	------------	-------	-------------	---------------	-----------	--------	-----	-----------	------

Batch AK21623 - Solvent Extraction

LCS (AK21623-BS1)

Prepared: 16-Nov-12 Analyzed: 17-Nov-12

Surrogate: Tetrachloro-m-xylene	36.2		ug/kg	50.0		72.5	22-120			
Surrogate: Decachlorobiphenyl	40.5		"	50.0		81.0	27-103			
Gamma-BHC(Lindane)	3.50	0.5	"	5.00		70.0	37-146			
Heptachlor	3.75	0.5	"	5.00		75.0	26-143			
Aldrin	3.75	0.5	"	5.00		75.0	30-143			
Dieldrin	9.75	0.5	"	12.5		78.0	23-145			
Endrin	10.5	0.5	"	12.5		84.0	50-142			
4,4'-DDT	9.50	0.5	"	12.5		76.0	48-95			
Aroclor 1248	ND	25.0	"				60-140			

LCS Dup (AK21623-BSD1)

Prepared: 16-Nov-12 Analyzed: 17-Nov-12

Surrogate: Tetrachloro-m-xylene	30.2		ug/kg	50.0		60.5	22-120			
Surrogate: Decachlorobiphenyl	32.0		"	50.0		64.0	27-103			
Gamma-BHC(Lindane)	3.00	0.5	"	5.00		60.0	37-146	15.4	40	
Heptachlor	3.00	0.5	"	5.00		60.0	26-143	22.2	40	
Aldrin	3.00	0.5	"	5.00		60.0	30-143	22.2	40	
Dieldrin	8.00	0.5	"	12.5		64.0	23-145	19.7	40	
Endrin	8.50	0.5	"	12.5		68.0	50-142	21.1	40	
4,4'-DDT	7.50	0.5	"	12.5		60.0	48-95	23.5	40	
Aroclor 1248	ND	25.0	"				60-140		40	

Matrix Spike (AK21623-MS1)

Source: 1211022-21


Prepared: 16-Nov-12 Analyzed: 19-Nov-12

Surrogate: Tetrachloro-m-xylene	30.2		ug/kg	50.0		60.5	22-120			
Surrogate: Decachlorobiphenyl	31.2		"	50.0		62.5	27-103			
Gamma-BHC(Lindane)	3.00	0.5	"	5.00	ND	60.0	60-140			
Heptachlor	3.00	0.5	"	5.00	ND	60.0	60-140			

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

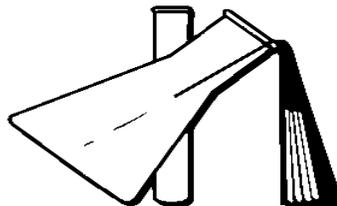

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 15 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954

Organochlorine Pesticides by EPA Method 8081 - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Note
-----------	--------	------------	-------	-------------	---------------	------	-------------	-----	-----------	------

Batch AK21623 - Solvent Extraction

Matrix Spike (AK21623-MS1)

Source: 1211022-21

Prepared: 16-Nov-12 Analyzed: 19-Nov-12

Aldrin	3.25	0.5	"	5.00	ND	65.0	60-140			
Dieldrin	8.25	0.5	"	12.5	ND	66.0	60-140			
Endrin	8.75	0.5	"	12.5	ND	70.0	60-140			
4,4'-DDT	7.75	0.5	"	12.5	ND	62.0	60-140			
Aroclor 1248	ND	25.0	"		ND		60-140			

Matrix Spike Dup (AK21623-MSD1)

Source: 1211022-21


Prepared: 16-Nov-12 Analyzed: 17-Nov-12

Surrogate: Tetrachloro-m-xylene	34.2		ug/kg	50.0		68.5	22-120			
Surrogate: Decachlorobiphenyl	38.2		"	50.0		76.5	27-103			
Gamma-BHC(Lindane)	3.75	0.5	"	5.00	ND	75.0	60-140	22.2	40	
Heptachlor	3.75	0.5	"	5.00	ND	75.0	60-140	22.2	40	
Aldrin	3.75	0.5	"	5.00	ND	75.0	60-140	14.3	40	
Dieldrin	9.75	0.5	"	12.5	ND	78.0	60-140	16.7	40	
Endrin	10.5	0.5	"	12.5	ND	84.0	60-140	18.2	40	
4,4'-DDT	9.50	0.5	"	12.5	ND	76.0	60-140	20.3	40	
Aroclor 1248	ND	25.0	"		ND		60-140		40	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

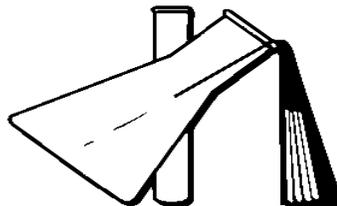

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 16 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954

Organophosphorus Pesticides by EPA Method 8141A - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC %REC	%REC Limits	RPD RPD	RPD Limit	Note
-----------	--------	------------	-------	-------------	---------------	-----------	-------------	---------	-----------	------

Batch AK21625 - Solvent Extraction

Blank (AK21625-BLK1)


Prepared: 16-Nov-12 Analyzed: 17-Nov-12

<i>Surrogate: 1,3-Dimethyl-2-nitrobenzene</i>	1400		ug/kg	2000		70.0	30-120			
Azinphos methyl	ND	50.0	"							
Bolstar	ND	50.0	"							
Chlorpyrifos	ND	50.0	"							
Coumaphos	ND	50.0	"							
Demeton-o	ND	50.0	"							
Demeton-s	ND	50.0	"							
Diazinon	ND	50.0	"							
Dichlorvos	ND	50.0	"							
Dimethoate	ND	50.0	"							
Disulfoton	ND	50.0	"							
EPN	ND	50.0	"							
Ethoprop	ND	50.0	"							
Fensulfothion	ND	50.0	"							
Fenthion	ND	50.0	"							
Malathion	ND	50.0	"							
Merphos	ND	50.0	"							
Mevinphos	ND	50.0	"							
Naled	ND	50.0	"							
Parathion	ND	50.0	"							
Methyl parathion	ND	50.0	"							
Phorate	ND	50.0	"							
Ronnel	ND	50.0	"							
Stirophos	ND	50.0	"							
Sulfotep	ND	50.0	"							

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

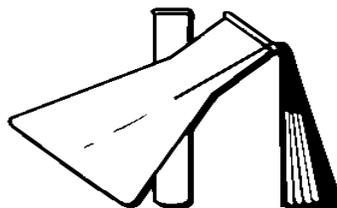

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 17 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954


Organophosphorus Pesticides by EPA Method 8141A - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC %REC	Limits	RPD	RPD Limit	Note
Batch AK21625 - Solvent Extraction										
Blank (AK21625-BLK1)				Prepared: 16-Nov-12 Analyzed: 17-Nov-12						
TEPP	ND	50.0	"							
Tokuthion (Prothiofos)	ND	50.0	"							
Trichloronate	ND	50.0	"							
LCS (AK21625-BS1)				Prepared: 16-Nov-12 Analyzed: 17-Nov-12						
Surrogate: 1,3-Dimethyl-2-nitrobenzene	1440		ug/kg	2000		72.0	30-120			
Malathion	974	50.0	"	1000		97.4	60-130			
LCS Dup (AK21625-BSD1)				Prepared: 16-Nov-12 Analyzed: 17-Nov-12						
Surrogate: 1,3-Dimethyl-2-nitrobenzene	1250		ug/kg	2000		62.3	30-120			
Malathion	870	50.0	"	1000		87.0	60-130	11.3	30	
Matrix Spike (AK21625-MS1)				Source: 1211022-21		Prepared: 16-Nov-12 Analyzed: 17-Nov-12				
Surrogate: 1,3-Dimethyl-2-nitrobenzene	1310		ug/kg	2000		65.4	30-120			
Malathion	926	50.0	"	1000	ND	92.6	40-130			
Matrix Spike Dup (AK21625-MSD1)				Source: 1211022-21		Prepared: 16-Nov-12 Analyzed: 17-Nov-12				
Surrogate: 1,3-Dimethyl-2-nitrobenzene	1280		ug/kg	2000		63.9	30-120			
Malathion	913	50.0	"	1000	ND	91.3	40-130	1.41	40	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

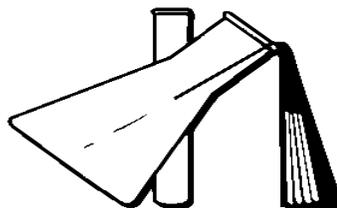

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 18 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954


General Inorganic Nonmetallic Chemistry by Standard Methods/EPA Methods - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC %REC	Limits	RPD	RPD Limit	Note
Batch AK21603 - General Preparation										
Blank (AK21603-BLK1)				Prepared & Analyzed: 16-Nov-12						
Total Kjeldahl Nitrogen	ND	1.0	mg/kg							
LCS (AK21603-BS1)				Prepared & Analyzed: 16-Nov-12						
Total Kjeldahl Nitrogen	99	1.0	mg/kg	100		99.0	85-115			
LCS Dup (AK21603-BSD1)				Prepared & Analyzed: 16-Nov-12						
Total Kjeldahl Nitrogen	99	1.0	mg/kg	100		99.3	85-115	0.303	15	
Duplicate (AK21603-DUP1)				Source: 1211169-01 Prepared & Analyzed: 16-Nov-12						
Total Kjeldahl Nitrogen	30	1.0	mg/kg		31			2.63	20	
Matrix Spike (AK21603-MS1)				Source: 1211169-01 Prepared & Analyzed: 16-Nov-12						
Total Kjeldahl Nitrogen	140	1.0	mg/kg	100	31	108	75-125			
Matrix Spike Dup (AK21603-MSD1)				Source: 1211169-01 Prepared & Analyzed: 16-Nov-12						
Total Kjeldahl Nitrogen	140	1.0	mg/kg	100	31	109	75-125	0.717	35	
Batch AK21613 - General Preparation										
Blank (AK21613-BLK1)				Prepared & Analyzed: 16-Nov-12						
Phosphorus, Total as P	ND	1.0	mg/kg							
LCS (AK21613-BS1)				Prepared & Analyzed: 16-Nov-12						
Phosphorus, Total as P	32.3	1.0	mg/kg	33.4		96.9	85-115			
LCS Dup (AK21613-BSD1)				Prepared & Analyzed: 16-Nov-12						
Phosphorus, Total as P	33.7	1.0	mg/kg	33.4		101	85-115	4.04	15	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

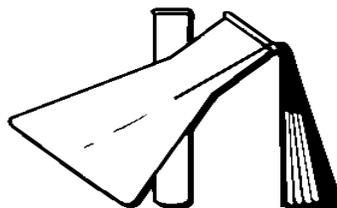

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 19 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954


General Inorganic Nonmetallic Chemistry by Standard Methods/EPA Methods - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Note
Batch AK21613 - General Preparation										
Duplicate (AK21613-DUP1) Source: 1211169-01 Prepared & Analyzed: 16-Nov-12										
Phosphorus, Total as P	101	1.0	mg/kg		103			2.45	20	
Matrix Spike (AK21613-MS1) Source: 1211169-01 Prepared & Analyzed: 16-Nov-12										
Phosphorus, Total as P	247	1.0	mg/kg	167	103	85.9	75-125			
Matrix Spike Dup (AK21613-MSD1) Source: 1211169-01 Prepared & Analyzed: 16-Nov-12										
Phosphorus, Total as P	248	1.0	mg/kg	167	103	86.9	75-125	0.673	80	
Batch AK21620 - General Preparation										
Blank (AK21620-BLK1) Prepared & Analyzed: 16-Nov-12										
% Solids	0.00		%							
Duplicate (AK21620-DUP1) Source: 1211169-01 Prepared & Analyzed: 16-Nov-12										
% Solids	97.0		%		97.0			0.00	15	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

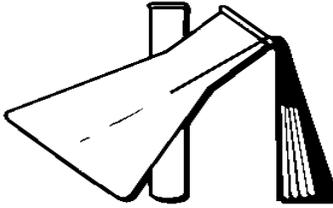

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 20 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954


Anions by EPA Method 300.0 - Quality Control

Parameter	Result	Rep. Limit	Units	Spike Level	Source Result	%REC %REC	Limits	RPD	RPD Limit	Note
Batch AK21621 - General Preparation										
Blank (AK21621-BLK1)				Prepared & Analyzed: 16-Nov-12						
Nitrite as N	ND	0.5	mg/kg							
Nitrate as N	ND	0.5	"							
LCS (AK21621-BS1)				Prepared & Analyzed: 16-Nov-12						
Nitrite as N	16.0	0.5	mg/kg	16.7		96.2	85-115			
Nitrate as N	14.3	0.5	"	16.7		85.8	85-115			
LCS Dup (AK21621-BSD1)				Prepared & Analyzed: 16-Nov-12						
Nitrate as N	14.3	0.5	mg/kg	16.7		86.0	85-115	0.233	15	
Nitrite as N	16.1	0.5	"	16.7		96.6	85-115	0.415	15	
Duplicate (AK21621-DUP1)				Source: 1211169-01		Prepared & Analyzed: 16-Nov-12				
Nitrate as N	10.3	0.5	mg/kg		10.7			3.17	20	
Nitrite as N	ND	0.5	"		ND				20	
Matrix Spike (AK21621-MS1)				Source: 1211169-01		Prepared & Analyzed: 16-Nov-12				
Nitrite as N	16.1	0.5	mg/kg	16.7	ND	96.8	80-120			
Nitrate as N	24.0	0.5	"	16.7	10.7	80.0	80-120			
Matrix Spike Dup (AK21621-MSD1)				Source: 1211169-01		Prepared & Analyzed: 16-Nov-12				
Nitrite as N	16.0	0.5	mg/kg	16.7	ND	96.2	80-120	0.622	20	
Nitrate as N	24.0	0.5	"	16.7	10.7	80.0	80-120	0.00	20	

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

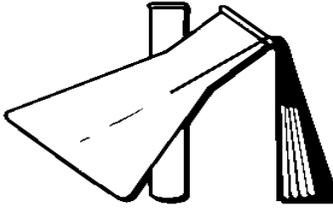

PAT-CHEM LABORATORIES

11990 Discovery Ct. • Moorpark, CA 93021 • Ph. (805) 532-0012 • Fax (805) 532-0016

Customer: **URS Corporation (San Diego) - Vendor # 112052**
4225 Executive Square, Suite 1600
La Jolla CA, 92037

Page 21 of 21

Attention: Elizabeth Chilman
Report Date: 19-Nov-12 13:54
Subject: Sediment - TJ River Valley

Project/P.O.#: 27679954

Notes and Definitions

- QR-04 The RPD value for the sample duplicate was outside of QC acceptance limits due to analyte concentration being below 3 - 5x the reporting limit. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values; and MS/MSD RPD values.
- QM-05 The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
- DET Analyte DETECTED
- ND Analyte NOT DETECTED at or above the reporting limit
- NR Not Reported
- dry Sample results reported on a dry weight basis

Respectfully Submitted,

Pat Brueckner
Laboratory Director

11/19/2012

IWQA Attachment 9/ Wetland Assessment Criteria

Wetland Assessment (Existing) Value Scoring System

Vegetation		Hydrosol		Hydroperiod	
Score	Description	Score	Description	Score	Description
0	No visible vegetation	0	Storm water facility reach with little to no sediment and storm water facility is lined with concrete or other impermeable substrate	0	No visible surface water within the storm water facility reach
1	Very young population of woody, terrestrial species with an overall low surface area coverage	1	Hydrosol consists of sand and cobble, with not visible deposition of fines, sediment pH is less than 6 or greater than 8, and redox within reach is positive (+100 mV)	1	Very deep (>2 feet) or very shallow (<0.5 feet) areas, fast flowing water and/or no deposition of fines and organic carbon in the storm water facility
2	Mature wetland population near carrying capacity, overgrown with both submerged and emergent wetland species	2	Heterogenous mixture of sand and fines with hydrosol, visible sedimentation, organics, neutral pH, and redox from (-100 mV to +100 mV)	2	Moderate water flow, intermittent/pulsed flow depending on inputs and effects of storm water events, a moderate HRT* (less than 12 hours), shallow (0.5-1 foot deep), redox ranging from -100 to +100 mV, and some deposition of fines
3	Young population of emergent and submerged wetland species which reproduce through tubers and/or rhizomes (Spartina, Typha, Scirpus, Phragmites)	3	System consisting of primarily fines and organic carbon, very little sand, and areas of high solids deposition, neutral pH, and redox less than -100 mV.	3	Water 1-2 feet deep, slow flow, with no evidence of scouring and/or channeling, a preferential HRT (>12 Hours), and measureable/observable deposition of fines.

*HRT-Hydraulic Retention Time

Wetland Assessment (Recovery) Value Scoring System

Vegetation		Hydrosol		Hydroperiod	
Score	Description	Score	Description	Score	Description
0	Assumption that the current population will not recover to its current density after removal of the standing crop	0	High flow or no flow area with little to no deposition likely	0	No sediment deposition within the reach due to channel flow.
1	The current population is comprised of trees and woody species and recovery would take greater than 5 years.	1	Primarily sand deposition in the short-term. The likelihood of fines and/or organic carbon accumulating within the reach is low within a 5 year period	1	Flow within the reach and thus some deposition of sand and other coarse grain materials

IWQA Attachment 9/ Wetland Assessment Criteria

Vegetation		Hydrosoil		Hydroperiod	
Score	Description	Score	Description	Score	Description
2	The current population is mature habitat with mix of woody and leafy vegetation. (Terrestrial and wetland species) Recovery would take 1 – 5 years	2	Heterogeneous mix of sand, organics, and fines depositing and accumulating in the next 1-5 years	2	Wide spot in the storm water facility after maintenance, resulting in some deposition of fines, and an overlying water depth of less than 0.5-feet.
3	Population comprised of primarily emergent and submerged wetland species and re-growth to the current density would take approximately 1 year.	3	Heterogeneous mix of sand, organics, and fines depositing and accumulating within the reach in the next year	3	Flood control reach with an overlying water depth greater than 1-foot, typically a wide spot in the storm water facility after maintenance, and associated deposition of fines and organics.

SG and Pilot Channel Sediment Pollutant Loading Calculations

Sediment

Equations:

$$\rho_{dry\ insitu} = \frac{\%solid * \rho_{water} * \rho_{solid}}{\rho_{solid} - (\%solid * \rho_{solid}) + (\%solid * \rho_{water})}$$

$$Sediment\ Mass = Removal\ Volume * \rho_{dry\ insitu}$$

Parameters:

$$\rho_{solid} = 165.4\ lbs/ft^3$$

$$\rho_{water} = 62.4\ lbs/ft^3$$

The approximated removal volume for the entire maintenance project is expected to be 30,000 cyd. Using after maintenance geometry of the SG Channel and Pilot Channel, the 30,000 cyd was distributed amongst the four analyzed sediment sample locations.

Sample ID	Removal Volume (cyd)	% Solid	$\rho_{dry\ insitu}$ lbs/ft ³	Sediment Mass (lbs)
SG-1:	8,040	97%	152.87	33,180,000
SG-2:	3,310	97%	152.87	13,660,000
TJ-1:	13,370	94%	141.47	51,070,000
TJ-2:	5,280	96%	148.95	21,230,000
Total:	30,000			119,140,000

Sediment Pollutant Loading

Analyte	SG-1		SG-2		TJ-1		TJ-2		TOTALS
	mg/kg	lbs	mg/kg	lbs	mg/kg	lbs	mg/kg	lbs	
Nitrate as N	10.7	3.55E+08	0.9	1.23E+07	23.7	1.21E+09	21.2	4.50E+08	2.03E+09
Nitrite as N	<0.5	-	<0.5	-	<0.5	-	<0.5	-	-
Total Kjeldahl Nitrogen	31	1.03E+09	210	2.87E+09	220	1.12E+10	130	2.76E+09	1.79E+10
Phosphorus, Total as P	103	3.42E+09	165	2.25E+09	363	1.85E+10	316	6.71E+09	3.09E+10
Chlorpyrifos	<.05	-	<.05	-	<.05	-	<.05	-	-
Diazinon	<.05	-	<.05	-	<.05	-	<.05	-	-
Malathion	<.05	-	<.05	-	<.05	-	<.05	-	-
Antimony	<1.0	-	<1.0	-	<1.0	-	<1.0	-	-
Arsenic	1.9	6.30E+07	2.9	3.96E+07	4.8	2.45E+08	3.5	7.43E+07	4.22E+08
Cadmium	<1.0	-	<1.0	-	<1.0	-	<1.0	-	-
Chromium	4.1	1.36E+08	13	1.78E+08	9.2	4.70E+08	8.9	1.89E+08	9.72E+08
Copper	2.9	9.62E+07	10	1.37E+08	7.5	3.83E+08	7.1	1.51E+08	7.67E+08
Lead	15	4.98E+08	2.8	3.82E+07	3.1	1.58E+08	5.0	1.06E+08	8.00E+08
Manganese	65	2.16E+09	55	7.51E+08	110	5.62E+09	99	2.10E+09	1.06E+10
Nickel	2.8	9.29E+07	4.7	6.42E+07	6.0	3.06E+08	5.8	1.23E+08	5.87E+08
Selenium	<1.0	-	<1.0	-	<1.0	-	<1.0	-	-
Zinc	14	4.65E+08	23	3.14E+08	38	1.94E+09	31	6.58E+08	3.38E+09
Tetrachloro-m-xylene	0.312	1.04E+07	0.228	3.11E+06	0.288	1.47E+07	0.230	4.88E+06	3.31E+07
Decachlorobiphenyl	0.360	1.19E+07	0.258	3.52E+06	0.318	1.62E+07	0.225	4.78E+06	3.65E+07
1,3-Dimethyl-2-nitrobenzene	1.920	6.37E+07	1.820	2.49E+07	1.660	8.48E+07	1.850	3.93E+07	2.13E+08

Attachment 9

Applicable PEIR Mitigation Measures

GENERAL

General Mitigation 1: Prior to commencement of work, the Assistant Deputy Director (ADD) Environmental Designee of the Entitlements Division shall verify that mitigation measures for impacts to biological resources (Mitigation Measures 4.3.1 through 4.3.20), historical resources (Mitigation Measures 4.4.1 and 4.4.2), land use policy (Mitigation Measures 4.1.1 through 4.1.13), paleontological resources (Mitigation Measure 4.7.1), and water quality (Mitigation Measures 4.8.1 through 4.8.3) have been included in entirety on the submitted maintenance documents and contract specifications, and included under the heading, "Environmental Mitigation Requirements." In addition, the requirements for a Pre-maintenance Meeting shall be noted on all maintenance documents.

General Mitigation 2: Prior to the commencement of work, a Pre-maintenance Meeting shall be conducted and include, as appropriate, the MMC, SWD Project Manager, Biological Monitor, Historical Monitor, Paleontological Monitor, Water Quality Specialist, and Maintenance Contractor, and other parties of interest.

General Mitigation 3: Prior to the commencement of work, evidence of compliance with other permitting authorities is required, if applicable. Evidence shall include either copies of permits issued, letters of resolution issued by the Responsible Agency documenting compliance, or other evidence documenting compliance and deemed acceptable by the ADD Environmental Designee.

General Mitigation 4: Prior to commencement of work and pursuant to Section 1600 et seq. of the State of California Fish & Game Code, evidence of compliance with Section 1605 is required, if applicable. Evidence shall include either copies of permits issued, letters of resolution issued by the Responsible Agency documenting compliance, or other evidence documenting compliance and deemed acceptable by the ADD Environmental Designee.

WATER QUALITY

Potential impacts to water quality would be reduced to below a level of significance through implementation of the following mitigation measures.

Mitigation Measure 4.8.1: Prior to commencement of any activity within a specific annual maintenance program, a qualified water quality specialist shall prepare an IWQA for each area proposed to be maintained. The IWQA shall be prepared in accordance with the specifications included in the Master Program. If the IWQA indicates that maintenance would impact a water pollutant where the existing level for that pollutant

exceeds or is within 25 percent of the standard established by the San Diego Basin Plan, mitigation measures identified in Table 4.8-8 shall be incorporated into the IMP to reduce the impact to within the established standard for that pollutant.

Table 4.8-8 MITIGATION MEASURES FOR REDUCED POLLUTANT REMOVAL CAPACITY							
Mitigation Measure	Pollutant Type						
	Bacteria	Metals	Nutrients	Pesticides	Sediment	TDS/Chloride Sulfates	Trash
Remove kelp on beaches					•	•	
Sweep streets	•	•	•	•	•	•	•
Retrofit residential landscaping to reduce runoff	•	•	•		•		
Install artificial turf	•	•	•	•	•		•
Install inlet devices on storm drains		•	•		•		
Replace impermeable surfaces with permeable surfaces		•	•		•		•
Install modular storm water filtration systems		•	•	•	•	•	•
Install storm water retention basins		•	•	•	•	•	•
Install catch basin media filters		•	•		•	•	•
Create vegetated swales	•	•	•	•	•	•	•
Restore wetlands	•	•	•	•	•	•	•
Install check dams		•			•		•

Mitigation Measure 4.8.2: No maintenance activities within a proposed annual maintenance program shall be initiated before the City’s ADD Environmental Designee and state and federal agencies with jurisdiction over maintenance activities have approved the IMPs and IWQAs including proposed mitigation and BMPs for each of the proposed activities. In their review, the ADD Environmental Designee and agencies shall also confirm that the appropriate maintenance protocols have been incorporated into each IMP.



THE CITY OF SAN DIEGO

June 17, 2015

Executive Officer
California Regional Water Quality Control Board
San Diego Region
Attn: 401 Certification Section; Project 09C-077
2375 Northside Drive Ste. 100
San Diego, CA 92108

Subject: Clean Water Act Section 401 Water Quality Certification for Tijuana River Valley Channel Maintenance Project, 09C-077 (reference 745397: lhonma)

Dear Executive Officer:

Pursuant to the Tijuana River Valley Channel Maintenance Project 401 certification, Project No. 09C-077, section IV, the City submits the Tijuana River Valley Channel Maintenance Project Receiving Water Monitoring Report.

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

Please feel free to contact Jamie Kennedy, Associate Planner, by phone at (619) 527-3495 or e-mail at JMKennedy@sandiego.gov, with questions or comments.

Respectfully,

Gene Matter
Assistant Deputy Director

GM/jk

Enclosure: Tijuana River Valley Channel Maintenance Project Receiving Water Monitoring Report, June 2015, prepared by Amec Foster Wheeler Environment & Infrastructure, Inc



**TIJUANA RIVER VALLEY CHANNEL MAINTENANCE PROJECT
RECEIVING WATER MONITORING REPORT - DRAFT**

Year 2- 2015 MONITORING EVENT

Prepared for:



**City of San Diego
Transportation and Storm Water Department
2781 Caminito Chollas, MS 44
San Diego, California 92105**

**Submitted by:
Amec Foster Wheeler Environment & Infrastructure, Inc.
9210 Sky Park Court, Suite 200
San Diego, California 92123
(858) 300-4300**

10 June 2015

Project No. 5025141106

TABLE OF CONTENTS

	Page
1.0 INTRODUCTION.....	4
2.0 METHODS	5
2.1 Monitoring Stations.....	5
2.2 Water Quality Monitoring	6
2.3 CRAM Monitoring	12
2.4 Benthic Biological Monitoring	13
3.0 RESULTS.....	14
3.1 Water Quality Results.....	14
3.2 CRAM Results.....	16
3.2.1 TJ-PC-U Site Assessment Area	16
3.2.2 TJ-PC-D Site Assessment Area	19
3.2.3 TJ-SG-U Site Assessment Area	20
3.3 Benthic Biological Results	22
3.3.1 BMI Community Composition	22
3.3.2 Diversity Metrics	24
3.3.3 Sensitivity Metrics.....	25
3.3.4 Functional Feeding Groups	25
4.0 QUALITY ASSURANCE/QUALITY CONTROL	27
4.1 Analytical Water Chemistry	27
4.2 CRAM Monitoring	27
4.3 Benthic Macroinvertebrate Identification	27
5.0 SUMMARY	28
5.1 Summary	28
5.1.1 Water Quality Monitoring	28
5.1.2 CRAM Monitoring	28
5.1.3 Sediment Infauna Biological Monitoring	28
5.2 Historical comparison to prior monitoring events.....	29
5.3 Next Steps.....	35
6.0 REFERENCES.....	36

LIST OF TABLES

Table 2-1. Locations of Monitoring Stations.....	6
Table 2-2. Summary of Water Quality Analytes.....	7
Table 3-1. Water Quality Results Summary for May 12, 2015 Field Survey.....	15
Table 3-2. Assessment Area CRAM Scoring Summary for May 12, 2015 Field Survey.....	17
Table 3-3. Raw Abundance of Individual Sorted Taxa for May 12, 2015 Field Survey.....	23
Table 3-4. Select Biological Metrics for May 12, 2015 Field Survey	24
Table 3-5. Percentages of Functional Feeding Groups for May 12, 2015 Field Survey	26

LIST OF FIGURES

Figure 2-1. Overview of Tijuana River Receiving Water Monitoring Stations	8
Figure 2-2. TJ-PC-U Monitoring Station.....	9
Figure 2-3. TJ-PC-D Monitoring Station.....	10
Figure 2-4. TJ-SG-U Monitoring Station	11
Figure 4-1. TKN, orthophosphate and total phosphorus concentrations across all stations and monitoring events.	30
Figure 4-2. Ammonia, nitrate and nitrite concentrations across all stations and monitoring events.....	31
Figure 4-3. Total suspended solids concentrations across all stations and monitoring events...	31
Figure 4-4. Chlorophyll-a concentrations across all stations and monitoring events.	32
Figure 4-5. In-situ field water quality pH & DO measured across all stations and monitoring events.	32
Figure 4-6. In-situ field water quality temperature & turbidity measured across all stations and monitoring events.	33
Figure 4-7. Overall CRAM scores across all stations and monitoring events.	34
Figure 4-8. Selected biological metrics describing benthic the invertebrate community across all monitoring events of the downstream Pilot Channel location.....	34

LIST OF APPENDICES

APPENDIX A PHOTO LOG
APPENDIX B DILUTED SAMPLE METHOD DETECTION LIMITS AND REPORTING LIMITS
APPENDIX C CRAM & FIELD SHEETS
APPENDIX D ANALYTICAL LABORATORY REPORT

ACRONYMS AND ABBREVIATIONS

Symbol	Description
%	percent
AA	assessment area(s)
Amec Foster Wheeler	Amec Foster Wheeler Environment & Infrastructure, Inc.
°C	degrees Celsius
CDFW	California Department of Fish & Wildlife
cm	centimeter
City	City of San Diego
CRAM	California Rapid Assessment Method
DO	dissolved Oxygen
EPA	Environmental Protection Agency
EPT	Ephemeroptera, Plecoptera, and Trichoptera
ID	identification
In-situ	Measurements taken at the station
HBI	Hilsenhoff Biotic Index
km	kilometers
L	liter
MDL	method detection limit
m	meter(s)
mg	milligrams
N	nitrogen
NOLF	Naval Outlying Landing Field
NTU	Nephelometric turbidity units
ppt	part(s) per thousand
Project	Tijuana River Valley Channel Maintenance Project 09C-077
RWQCB	Regional Water Quality Control Board
RL	reporting limit
SBIWTP	South Bay International Wastewater Treatment Plant
SD	San Diego
SM	standard method
SWAMP	Surface Water Ambient Monitoring Program

Symbol	Description
SWI	Shannon Weiner Index
SWRCB	State Water Resources Control Board
TJ-PC-D	Downstream Tijuana River Pilot Channel station
TJ-PC-U	Upstream Tijuana River Pilot Channel station
TJ-SG-U	Upstream Smuggler's Gulch station
TKN	total Kjeldahl nitrogen
TSS	total suspended solids
TSWD	Transportation and Storm Water Department
µS	microSiemens

1.0 INTRODUCTION

The City of San Diego (City) has implemented a maintenance dredging program within the Tijuana River Valley to restore storm water conveyance capabilities of selected channels and reduce the potential for flooding of nearby properties. The dredging removes between 10,000 and 30,000 cubic yards of dredge material each maintenance event from the Tijuana River Pilot Channel (Pilot Channel) and Smuggler's Gulch. In addition, the City is eradicating non-native plant species (e.g., *Arundo* (*Arundo donax*), Castor Bean (*Ricinus communis*), and Tamarisk (*Tamarix aphylla*)) in an 8.62 acre area within and adjacent to the maintenance area footprint.

The San Diego Regional Water Quality Control Board (RWQCB) issued an amendment to the Clean Water Act Section 401 Water Quality Certification (Certification) and acknowledged enrollment under State Water Resources Control Board (SWRCB) Order No. 2003-17-DWQ for Statewide General Waste Discharge Requirements for Dredged or Fill Discharges for the Tijuana River Valley Channel Maintenance Project 09C-077 (Project). The Certification required the Project to include the following three monitoring components to help quantify the potential impacts to the Tijuana River from the maintenance dredging of the Pilot Channel and Smuggler's Gulch:

1. Benthic Biological Monitoring (Section VI.C.1): Assessment of the effects of the project on the biological integrity of the Pilot Channel and Smuggler's Gulch by analyzing the benthic macroinvertebrate community.
2. Water Quality Assessment (Section VI.C.2): Analysis of the water quality through the collection of grab samples, which are to be analyzed for the constituents listed in the Certification.
3. California Rapid Assessment Method (CRAM) (Section VI.C.3): Quantitative function-based health assessment of the wetland and riparian habitat.

Each of the three components are to be implemented before maintenance begins, during the five-year maintenance period (before/during/after each annual maintenance event), and after maintenance is concluded at the completion of the five-year permit cycle. To quantify impacts, results of the three monitoring components will be compared over time and between locations. The data will be reviewed to determine whether there are discernible differences between initial-maintenance assessment, during-maintenance assessments, and final-maintenance assessment results.

This current report documents water quality, CRAM, and benthic biological monitoring for the 2014-2015 season (July 2014 – June 2015) performed on May 12, 2015. No maintenance dredging was performed during the 2014-2015 season; therefore, this report describes ambient conditions surrounding the dredge footprint.

This current monitoring effort follows four previous monitoring events: one pre-project event on January 31, 2013, and three events in association with the first maintenance dredging which occurred between September 2013 and February 2014. These three maintenance dredging monitoring efforts took place September 16, 2013 (pre-dredge), October 17, 2013 (during-dredge), and February 25, 2014 (post-dredge).

2.0 METHODS

2.1 Monitoring Stations

The monitoring locations were based on requirements outlined in the Certification which state that monitoring must occur both upstream and downstream of the maintenance area. Three locations in the immediate vicinity of the maintenance footprint were selected for water quality and CRAM monitoring (Table 2-1, Figure 2-1). The upstream Pilot Channel location (TJ-PC-U) is located approximately 170 meters (m) upstream of the Hollister Street Bridge (Figure 2-2). The downstream Pilot Channel (TJ-PC-D) location is located approximately 1,000 m west of the intersection of Sunset Avenue and Saturn Boulevard (Figure 2-3). The upstream Smuggler's Gulch location (TJ-SG-U) is located approximately 70 m upstream of the Monument Road crossing (Figure 2-4).

An October 2012 pre-project reconnaissance of the three bioassessment monitoring stations detailed in the Certification concluded that the upstream and downstream locations immediately surrounding the Project area were not viable locations for standard freshwater bioassessment sampling using SWAMP bioassessment protocols due to the following site conditions:

- The area immediately upstream of the dredge footprint on the Pilot Channel presented unsafe sampling conditions with deep water and soft fine sediment.
- The downstream location on the Pilot Channel consisted of saline conditions due to tidal influence.
- The upstream location on Smuggler's Gulch is dry for the vast majority of the year, only flowing briefly after a rain event.

In an effort to remain within the parameters and intent outlined in the Certification, it was determined that the downstream Pilot Channel location (see Table 2-1, Figure 2-3) which appeared to remain wetted year-round would be solely utilized for biological collections, as this would represent the location most influenced by dredging activities. However, given that this location occurs in a tidally influenced area, standard freshwater bioassessment methods and metrics would no longer apply at the downstream Pilot Channel location. Thus, a sediment biota sampling method similar to the Water Quality Control Plan for Enclosed Bays and Estuaries - Part 1 Sediment Quality promulgated by the SWRCB (SWRCB, 2009) and the Sediment Quality Objectives (SQO) Technical Support Manual (SCCWRP, 2014) used in estuarine and marine environments was employed for the benthic biota collections. This method is further outlined in Section 2.4.

Table 2-1. Locations of Monitoring Stations

Station	Location	Monitoring Type	Latitude ^(a)	Longitude ^(a)
TJ-PC-U	Pilot Channel upstream of dredge footprint	Water quality & CRAM	32.550664	-117.081135
TJ-SG-U	Smuggler's Gulch upstream of dredge footprint	Water quality & CRAM	32.542451	-117.088147
TJ-PC-D	Pilot Channel downstream of dredge footprint	Water quality, CRAM, & Benthic biology	32.557994	-117.103539

Notes:

- NAD_1983_StatePlane_California_V_FIPS_0405_Feet WKID: 2229 Authority: EPSG

2.2 Water Quality Monitoring

Water was observed and collected at the upstream and downstream Pilot Channel locations. Water was not observed at the TJ-SG-U; therefore, no samples were collected there. Pre-cleaned sample bottles were obtained from the analytical laboratory for collection of water quality samples. The following sample handling protocols were utilized when collecting samples to minimize the possibility of contamination:

4. When the analytical methods did not require a chemical preservative, the sample bottle was used directly to collect the sample.
5. If the analytical method required preservation, a pre-cleaned bottle was used as a secondary container to collect the sample which was then transferred to the laboratory-provided analytical container.

Manual grab samples were collected by inserting the pre-cleaned bottle upside-down into the channel and then inverting at the approximate midway point in the water column with the container opening facing upstream. A grab pole was used as necessary to collect water samples from as close to the horizontal center of the channel as site conditions allowed. Samples were analyzed for the constituents stipulated in the Certification (Table 2-2). Parameters measured in the field include: pH, temperature, dissolved oxygen (DO), turbidity, and specific conductance.

Sample containers were labeled with a unique sample ID, date, time, project, analyses, and collector's initials. The samples were then packed on ice and transported to Amec Foster Wheeler Environment & Infrastructure, Inc. (Amec Foster Wheeler). Samples were held on ice until transferred to a laboratory-provided courier.

**Table 2-2.
 Summary of Water Quality Analytes**

Analytical Parameter	Analytical Method	Container	Preservation	Maximum Holding Time (Days)	Amount Needed
Alkalinity, Total	SM 2320B	250 mL Poly	<6°C	14	250 mL
Ammonia as Nitrogen (N)	EPA 350.1	250 mL Poly	<6°C, H ₂ SO ₄	28	250 mL
Chloride	EPA 300.0	250 mL Poly	<6°C	28	250 mL
Nitrate-Nitrogen as N	EPA 353.2	250 mL Poly	<6°C	2	250 mL
Nitrite-Nitrogen as N	EPA 353.2	250 mL Poly	<6°C	2	250 mL
Total Kjeldahl Nitrogen (TKN)	EPA 351.2	250 mL Poly	<6°C, H ₂ SO ₄	28	250 mL
Ortho-Phosphate Phosphorous	EPA 365.3/ EPA 365.1	250 mL Poly	<6°C, filtered	2	250 mL
Total Phosphorous	EPA 365.1	250 mL Poly	<6°C, H ₂ SO ₄	28	250 mL
Total Suspended Solids (TSS)	SM 2540D	500 mL Poly	<6°C	7	500 mL
Chlorophyll a	SM 10200H	1 L Amber Poly	<6°C	2	100 mL

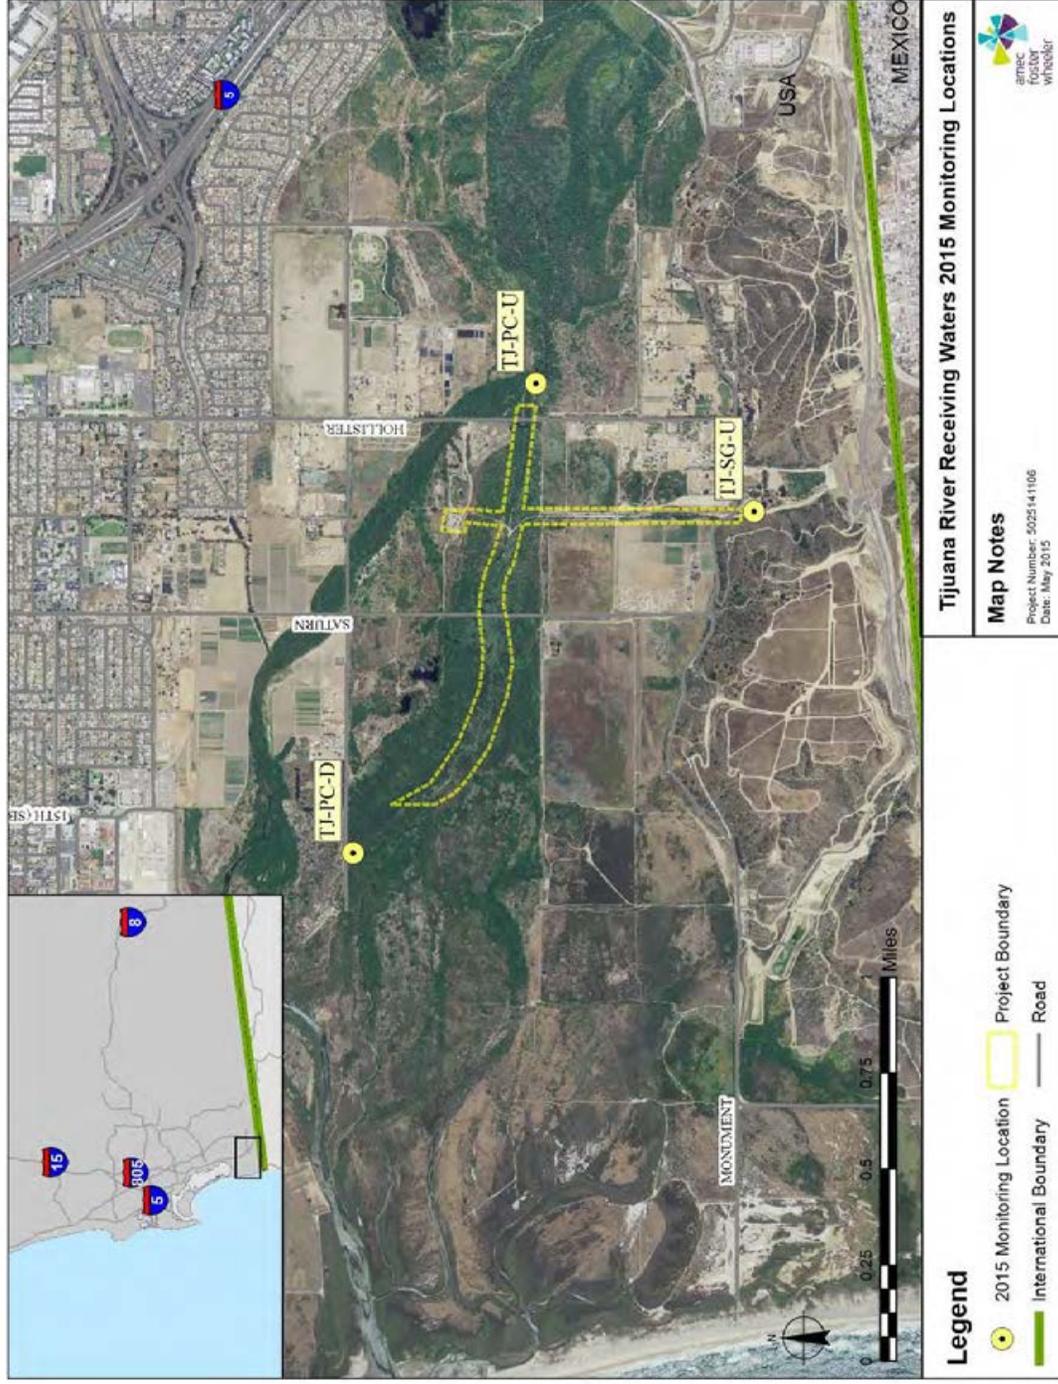


Figure 2-1. Overview of Tijuana River Receiving Water Monitoring Stations

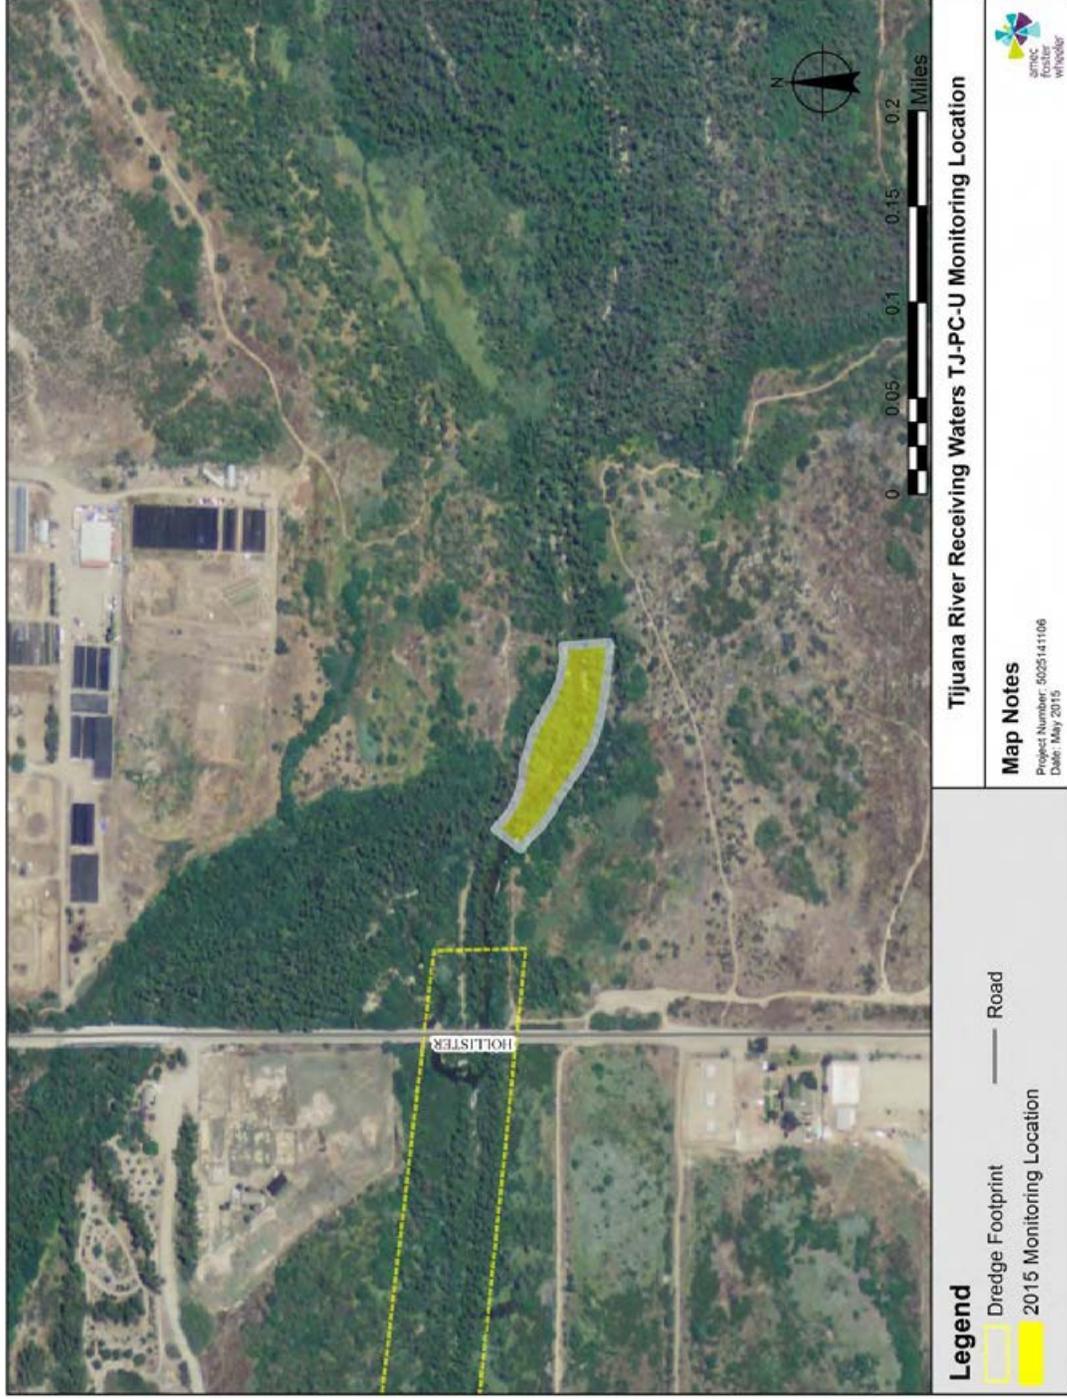


Figure 2-2. T.J-PC-U Monitoring Station
Water quality samples and CRAM data were collected at this location.

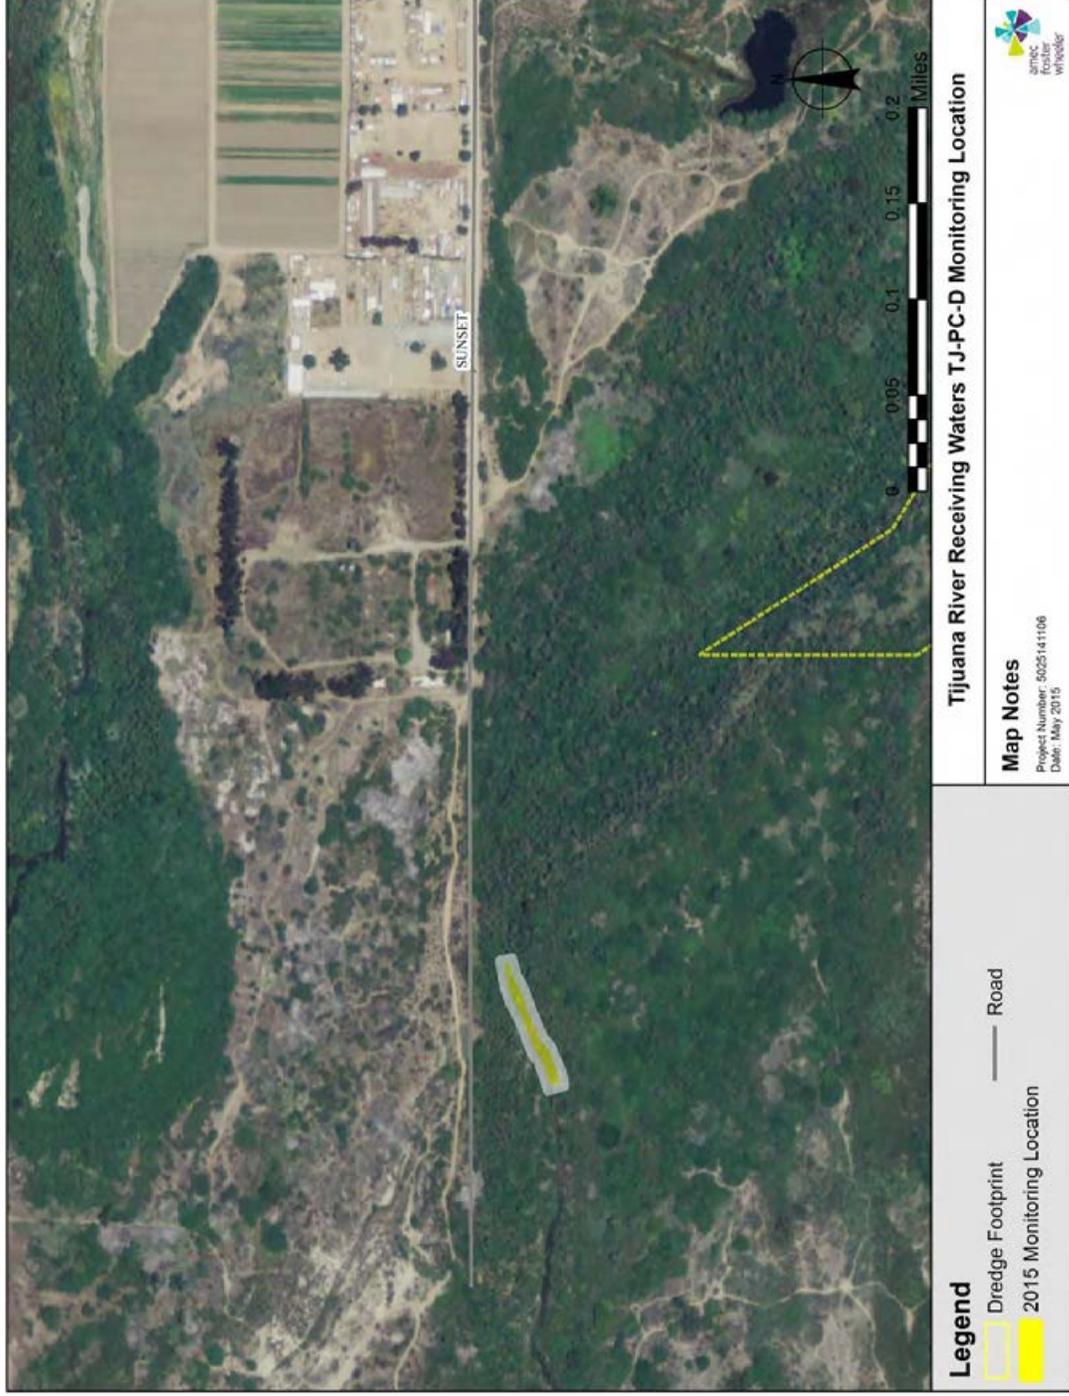


Figure 2-3. T.J-PC-D Monitoring Station

Water quality samples, benthic biological samples, and CRAM data were collected at this location.

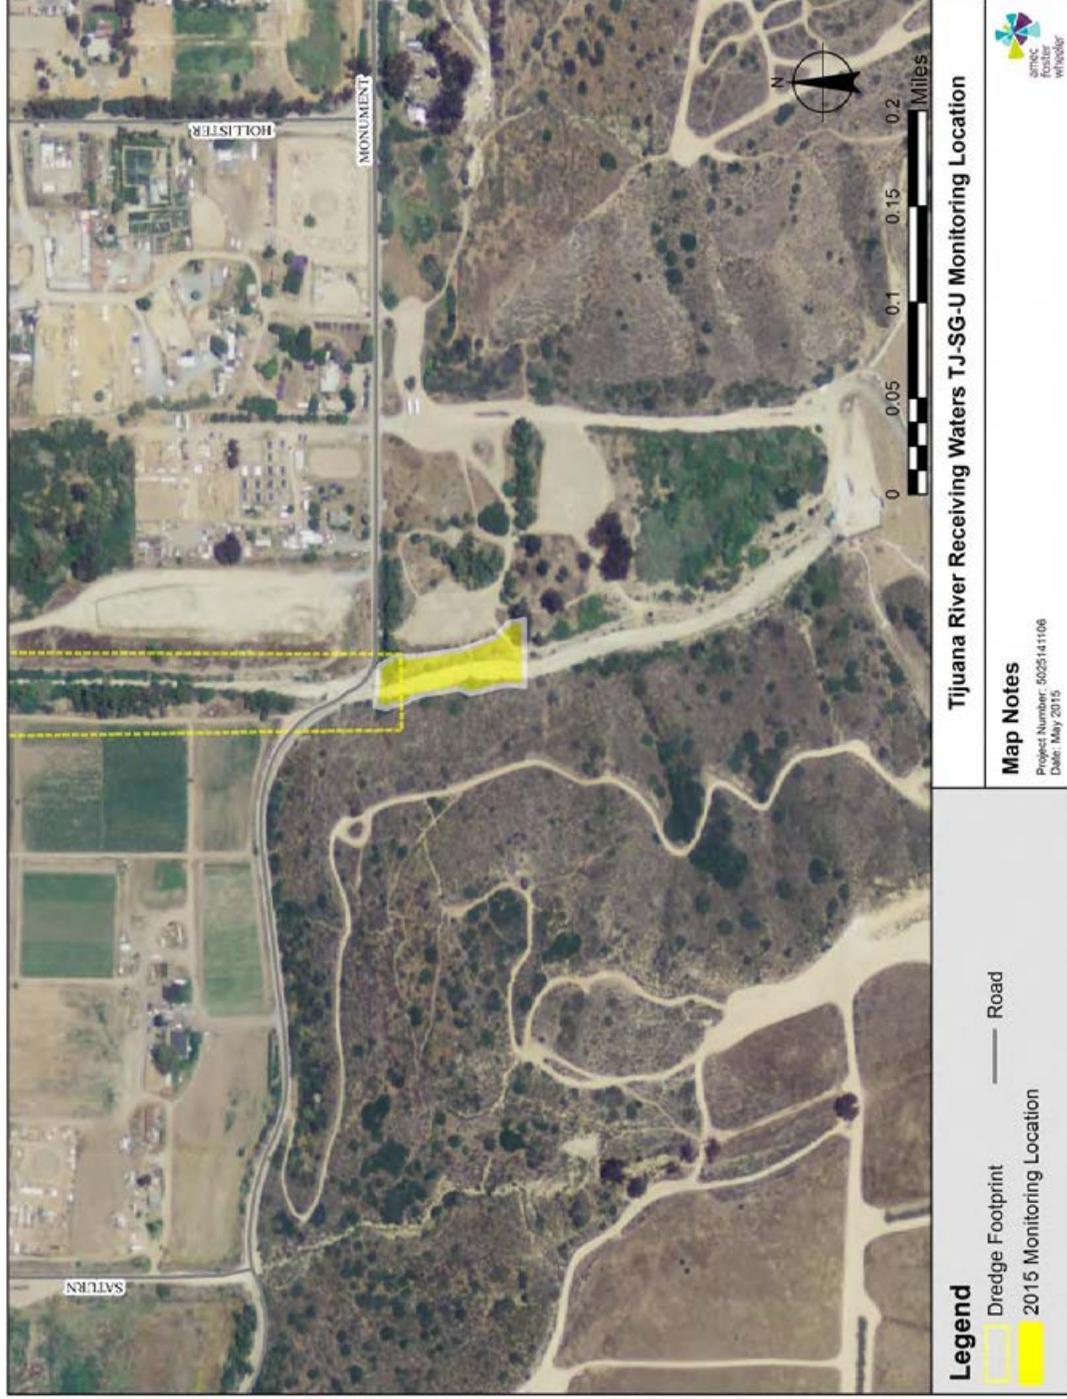


Figure 2-4. TJ-SG-U Monitoring Station
Only CRAM data were collected at this location

2.3 CRAM Monitoring

During CRAM analysis, an Assessment Area (AA) polygon is established around the wetland and the functionality of the wetland within is evaluated. An AA is established by starting at a hydrologic or geomorphic break in structure of the channel, and extends longitudinally ten times the average bankfull width or a minimum of 100 m and for a distance no longer than 200 m. If no break in structure is present, then the AA can begin at a selected point within the wetland area in order to accomplish project goals. The AA extends laterally to include the riparian zone and floodplain areas that receive direct input from the surrounding area (i.e., organic debris such as leaves, limbs, insects, etc.). For the purposes of this CRAM analysis, both sections of the Tijuana River (TJ-PC-U and TJ-PC-D) were classified as a perennial, non-confined riverine system, while TJ-SG-U was classified as an ephemeral, non-confined system. Although the Tijuana River is largely an ephemeral stream, the survey areas in the lower portion of the river, located near the estuary, appear to receive perennial flow, but this may be dependent upon the annual rainfall received in the current and previous years. All of the AA's established for this CRAM analysis were either upstream or downstream of the maintenance area, and do not necessarily include sections of the channel in which maintenance dredging occurred or invasive plants were removed as required in the 401 Certification as wetlands mitigation.

CRAM analysis requires the evaluation of the AAs on four attributes that include buffer and landscape context, hydrology, physical structure, and biotic structure. Each of these attributes is further described below:

- Buffer and landscape context – Assesses a riverine system in terms of the continuity of the buffer within 500 m upstream and downstream and the quality of the buffer immediately surrounding the AA. This attribute measures the ability of wildlife to enter the riparian corridor buffer and easily move within it along the wetland area within 500 m of the AA. Buffer is defined as an area in a natural or semi-natural state that is not currently dedicated to anthropogenic uses which would detract from its ability to protect the AA from stress or disturbance.
- Hydrology – Assesses the water source and quality, as well as the channel stability and its connection to the surrounding flood plain.
- Physical structure – Assesses the availability of various habitat patch types and topographical complexity of the channel that indicate the capacity of the riverine system to support characteristic flora and fauna.
- Biotic structure – Assesses horizontal and vertical plant structure, which measures the number of distinct plant zones in plan-view and the amount of vertical overlap of plant canopy layers. In addition, the species dominance and composition of the plant community within the AA is assessed.

Each attribute has sub-metrics that are scored with a letter that indicates its status, with an “A” score indicating good condition and a “D” score indicating poor condition. The letter score is then converted to a numerical value (i.e., A=12, B=9, C=6, and D=3) and a final attribute score is calculated. The final overall CRAM score is the average of the four individual attribute scores

received. The purpose of using the CRAM scoring system is to provide a context for comparison of the Project efforts over a period of time.

Finally, a number of physical, hydrological, biotic and landscape scale stressors are evaluated to assess their potential for impacting the riverine ecological function. Each are assessed to be present or absent and their likelihood of significantly affecting the AA. These stressor assessments are based on visual site inspections, satellite imagery of nearby landscape, and publically information available for the water body or watershed in question. They are not based on analytical measurements or other samples taken at the time of the survey.

2.4 Benthic Biological Monitoring

Methods similar to the Water Quality Control Plan for Enclosed Bays and Estuaries - Part 1 Sediment Quality promulgated by the SWRCB (SWRCB, 2009) and the Sediment Quality Objectives (SQO) Technical Support Manual (SCCWRP, 2014) were used to collect benthic macroinvertebrates at the downstream Pilot Channel location.

Three field replicates were collected approximately 8 m apart, starting downstream and moving upstream with each successive collection. A 0.2 m x 0.2 m Eckman grab was used for collection of the sediment samples. The grab was pushed by hand down into the undisturbed sediment approximately six to eight centimeters (cm). The grab jaws were then triggered and closed. The grab device was removed from the substrate and placed unopened into a large plastic tray. The depth of sediment penetration was measured and an assessment of the acceptability of the grab was made (i.e. >5cm penetration, >90% of the sediment surface intact, no washing or canting). Observations of sediment type, color, and odor were recorded. The entire contents of each sediment grab was then emptied into the plastic tray and systematically sieved through a 1.0-millimeter (mm) metal sieve. The material and organisms from each replicate retained on the sieve were placed separately into 1-liter (L) Nalgene bottles and preserved with 95% ethanol. These three samples were then analyzed for taxonomic identification.

3.0 RESULTS

3.1 Water Quality Results

The reported results from the water quality grab samples collected at the TJ-PC-U and the TJ-PC-D stations are presented in Table 3-1. TJ-SG-U was dry and therefore no water quality results are reported for that location during this sampling event. The water quality samples were collected on May 12, 2015.

A log containing representative photos of each sampling location is presented in Appendix A. Analytical MDLs and RLs are provided in Table 3-1 and Appendix B. Dilution factors required for several constituents are also included in Appendix B for reference. Copies of field data sheets are presented in Appendix C. Analytical laboratory reports are contained in Appendix D.

The reported water quality results are summarized as follows:

- Nutrient concentrations (i.e. ammonia, TKN, dissolved orthophosphate, nitrite, nitrate, and total phosphorus) at the upstream Pilot Channel station were all higher than measured at the downstream Pilot Channel station.
- Chlorophyll-a, alkalinity, and chloride concentrations were elevated at the downstream stream Pilot Channel. One might expect higher alkalinity and chloride concentrations at the downstream location due to the tidal influence.
- The TSS concentration at the upstream Pilot Channel was 2.8 times that of the downstream location.

Recorded *in-situ* water quality measurements are summarized in Table 3-1. TJ-SG-U was dry during the monitoring event and therefore could not be sampled. The *in-situ* water quality results are summarized as follows:

- pH measurements at the two sites with water were fairly similar and ranged from 7.62 to 8.07.
- Specific conductance was greater at TJ-PC-U. While this site has been shown to be tidally influenced, the field measurements at TJ-PC-D were taken at a low 0.2-foot tide when water at the site was more likely dominated by upstream groundwater sources.
- Turbidity was slightly greater at TJ-PC-U.
- DO was depressed at both Pilot Channel stations, with the upstream station having much lower values than the downstream station.

Table 3-1. Water Quality Results Summary for May 12, 2015 Field Survey

Analyte	Method	Units	MDL	RL	TJ-PC-U	TJ-PC-D	TJ-SG-U
Alkalinity as CaCO ₃	SM 2320 B	milligrams per liter (mg/L)	0.56	10	360	550	NA
Ammonia as N ^a	EPA 350.1	mg/L	0.048-2.4	0.1-5.0	15	0.19	NA
Chloride ^a	EPA 300.0	mg/L	1.0-2.5	5.0-12	360	430	NA
Chlorophyll <i>a</i>	SM 10200 H-2b	micrograms per liter (µg/L)	8.3	10	<8.3	21	NA
Nitrate as N	EPA 353.2	mg/L	0.041	0.10	2.6	0.057 ^J	NA
Nitrite as N	EPA 353.2	mg/L	0.010	0.10	0.93	0.010 ^J	NA
Total Kjeldahl Nitrogen (TKN) ^a	EPA 351.2	mg/L	0.05-0.25	0.1-0.5	19	0.63	NA
Dissolved Orthophosphate as P (Reactive P) ^a	EPA 365.1M	mg/L	0.0002-0.011	0.002-0.01	5.4	0.76	NA
Total Phosphorus as P (Total P) ^a	EPA 365.3	mg/L	0.007-0.07	0.02-0.5	6.2	0.23	NA
Total Suspended Solids (TSS)	SM 2540 D	mg/L	5	5	22	8.0	NA
pH	Field Meter	pH units	NA	NA	8.07	7.62	NA
DO	Field Meter	mg/L	NA	NA	0.8	4.4	NA
Specific Conductance	Field Meter	microSiemens per centimeter (µS/cm)	NA	NA	2354	1491	NA
Temperature	Field Meter	degrees Celsius (°C)	NA	NA	18.2	18.9	NA
Turbidity	Field Meter	Nephelometric turbidity units (NTU)	NA	NA	9.05	4.28	NA

Notes:

- RL - reporting limit
- MDL - method detection limit
- NA - Not applicable, or sampling location was dry and therefore could not be sampled.
- SM - Standard Method
- EPA - Environmental Protection Agency
- < - Not detected above MDL. Concentration is reported as less than MDL.
- J - Concentration detected below the reporting limit, but above method detection limit, and as such is an estimate.
- ^a - Sample was diluted by laboratory and therefore has an elevated MDL and RL. These values are provided in Appendix B.

3.2 CRAM Results

Table 3-2 provides a summary of the CRAM scoring for the three AAs with extended details on each AA provided in Sections 3.2.1 through 3.2.3.

3.2.1 TJ-PC-U Site Assessment Area

The delineated AA for TJ-PC-U is depicted on Figure 2-2. This location was characterized by perennial flow in a non-confined setting. Very slow flowing deep water was present at the time of the survey. A summary of CRAM scores for TJ-PC-U is presented in Table 3-2. The western end of the AA begins approximately 170 m east of Hollister Street Bridge and extends 160 m upstream from that point. The AA includes the bankfull width of the Pilot Channel and the lateral floodplain benches present. The approximate width of the AA ranged from 25 m to 46 m, with an average bankfull width of approximately 17.3 m.

Buffer and Landscape Context

The riparian corridor continuity attribute extending 500 m upstream and downstream of AA is in good condition. Both upstream and downstream riparian corridors were uninterrupted, with the only exception being the Hollister Street bridge crossing providing a small break in the buffer on the downstream end. The buffer immediately surrounding the AA scored high in all three submetrics. The AA is surrounded by one-hundred percent riparian buffer, which is in fair to good condition, with an average width of 225 m. Small unpaved hiking trails are present, but do not appear to impede wildlife movement or to be heavily utilized.

Hydrology

The water source was in fair condition as defined in the CRAM guidance. The freshwater sources consist primarily of infiltrated local residential and agricultural irrigation rising as groundwater. The immediate drainage basin (i.e. within 2 km) is comprised of more than twenty percent residential and artificially irrigated land. The international Mexican border is approximately 4km upstream of the AA and is heavily urbanized beyond that point. However, dry season flows are diverted at the international border by South Bay International Wastewater Treatment Plant (SBIWTP) and do not reach the estuary. The majority of channel stability characteristics suggested equilibrium conditions with some limited evidence of degradation and aggradation, including some willow trees declining in stature with some leaning or falling into the channel (evidence of degradation) and fine sediment accumulated on the flood plain partially burying tree trunks (evidence of aggradation). Hydrologic connectivity to the surrounding landscape was in fair condition with an average entrenchment ratio of 1.6, indicating that the river is somewhat limited in its ability to spread laterally into its floodplain during times of high flow. The entrenchment ratio is calculated by dividing the flood prone width (the area water would laterally inundate during high storm flows) by the bankfull width (the area water typically inundates during base flow or small <0.3 inch storms). It measures how well the stream is connected to its riparian floodplain. Entrenchment ratios range from 1.0 at the low end (i.e. flood prone width = bankfull width), and do not have an upper bound. CRAM scoring criteria for entrenchment ratios in a non-confined wetland are divided into four categories: Excellent (>2.2), Good (2.2 - 1.9), Fair (1.8 – 1.5), and Poor (<1.5).

Table 3-2. Assessment Area CRAM Scoring Summary for May 12, 2015 Field Survey

		Site		
		TJ-PC-U	TJ-PC-D	TJ-SG-U
Approx. Length (m)		160	100	120
Average Bankfull Width (m)		17.3	5.3	5.7
Wetland Sub-type		Non-confined	Non-confined	Non-confined
Buffer Coverage (%)		100	100	100
Average Buffer Width (m)		225	250	188
CRAM Riverine Wetlands Scoring				
Landscape and Buffer Context	Riparian Continuity (Aquatic Area Abundance)	A	A	A
	Percent of AA with Buffer	A	A	A
	Average Buffer Width	A	A	B
	Buffer Condition	B	B	C
	Final Attribute Score	91.7	91.7	83.3
Hydrology	Water Source	C	C	C
	Channel Stability	B	B	C
	Hydrologic Connectivity	C	D	A
	Final Attribute Score	58.3	50.0	66.7
Physical Structure	Structural Patch Richness	D	D	D
	Topographic Complexity	C	C	B
	Final Attribute Score	37.5	37.5	37.5
Biotic Structure	Number of Plant Layers	A	A	A
	Number of Co-dominant Species	D	C	C
	Percent Invasion	C	C	D
	Horizontal Interspersion	C	B	B
	Vertical Biotic Structure	C	B	D
	Final Attribute Score	52.8	72.2	61.1
Overall AA Score		60.1	62.9	65.3

Notes:

- % - percent
- AA - assessment area
- m - meter

Physical Structure

Low habitat patch diversity was observed within the river and its floodplain. The channel and its floodplain substrate consisted almost exclusively of fine-grained material (i.e. silt and sand). Of the seventeen patch types possible in a non-confined riverine wetland, two were present during the first two monitoring events (i.e., wrackline and large woody debris), for only twelve percent of the expected number of classes.

In terms of the cross sectional topographic complexity of the site, gently sloping banks were present on both sides of the river, with minimal benching and almost no micro-topography. The south side of the river yielded a single bench and had a much broader floodplain than the north side, allowing for high flows and floodwaters to extend out further laterally along the south side of the river channel.

Biotic Structure

The overall biotic structure was fair. The number of plant layers was good, with four of the five possible plant layers present: short (<0.5 m), medium (0.5-1.5 m), tall (1.5 m – 3.0 m) and very tall (>3.0m). However, the number of codominants was poor with only five present: Castor Bean (*Ricinus communis*), Arroyo Willow (*Salix lasiolepis*), Black Willow (*Salix gooddingii*), Mulefat (*Baccharis salicifolia*), and Nasturtium (*Tropaeolum majus*). Additionally, the percent of co-dominant species considered invasive was relatively high at 40 percent. The vertical biotic structure is fair with moderate overlap of two canopy layers, as the site is dominantly shaded with very tall tree canopy. The understory supports limited herbaceous plants, dominated by Castor Bean. The horizontal interspersed attribute score was rated as fair, due primarily to the relative homogeneous distribution of the plant groups.

Potential Stressors

There was one primary hydrological stressor that was identified for the TJ-PC-U AA; non-point source discharges may affect the riverine wetland, and it was determined that this impact could be a significant negative impact on the water quality of the AA. There were five water quality stressors that were identified for the AA; bacterial pathogens, nutrients, heavy metals, pesticides, and trash or refuse. While bacterial pathogens, heavy metals, and pesticides were not measured analytically as part of this study, the Tijuana River is considered impaired (303(d) listed) for all of these stressors, including nutrients and trash. These water quality stressors were present and may have a significant negative effect on the AA. Of the biotic stressors assessed as part of the CRAM protocol, only lack of treatment of invasive plant species was observed. This segment of the Tijuana River was upstream of the dredge area footprint where invasives were actively being removed, and contained a significant presence of Castor Bean (*Ricinus communis*). Land use stressors identified include urban residential development, orchards/nurseries, commercial feedlots, ranching (equestrian boarding lots), and passive recreation; however, none were determined likely to have a significant effect on the AA.

3.2.2 TJ-PC-D Site Assessment Area

The delineated area for the TJ-PC-D AA is depicted on Figure 2-3. The TJ-PC-D location was characterized as a perennial system in a non-confined setting. Flowing water was present at the time of the three surveys. A summary of CRAM scores for TJ-PC-D is presented in Table 3-2. The eastern end of the AA starts approximately 1,000 m west of the Sunset Avenue and Saturn Boulevard intersection and extends 100 m downstream from that point. The AA includes the bankfull width of the Pilot Channel and the lateral floodplain benches present. The approximate width of the AA ranged from 12 m to 16 m, with an average bankfull width of approximately 5.3 m.

Buffer and Landscape Context

The riparian corridor continuity attribute extending 500 meters upstream and downstream of AA was in good condition. Both upstream and downstream riparian corridors were uninterrupted, providing a continuous buffer for wildlife movement and protection from anthropogenic influences. The buffer immediately surrounding the AA scored high in all three submetrics. The AA was surrounded by one-hundred percent riparian buffer, which is in good condition, with an average width of 250 m. While the maximum buffer assessed as part of CRAM is 250 meters, the actual buffer for this location extended well beyond 250 meters. Small unpaved recreational hiking and horse trails are present to the north of the AA, but do not appear to impede wildlife movement or be heavily utilized.

Hydrology

The water source was in fair condition as defined in the CRAM guidance. Similar to the upstream location, the natural freshwater sources consist primarily of groundwater from local irrigation, with the immediate drainage basin (i.e. within 2km), being comprised of more than twenty percent residential and artificially irrigated land. The international Mexican border is approximately 6km upstream of the AA and is heavily urbanized beyond that point. However, dry season flows are diverted at the international border by SBIWTP and do not reach the estuary. During the survey, the TJ-PC-D sampling location was hydrologically disconnected from the TJ-PC-U location. Channel stability is characterized by a mixture of equilibrium and degradation conditions. Equilibrium conditions were characterized by a well-defined bankfull contour throughout most of the AA, with leaf litter, wrack, and woody debris consistent with that available in the surrounding riparian area. Perennial riparian vegetation was well established above the bankfull contour, but not below it. Degradation was evidenced by some riparian vegetation declining in stature and leaning into the channel. The lower banks were absent of vegetation and throughout a major portion of the AA, steep walled banks were present, with evidence of bank slumps. Some portions of the channel were undercut with roots being exposed. Overall the river bed was planar, with no observations of increased habitat complexity (e.g., pools, riffles). Due to the steep walled banks, the hydrologic connectivity to the surrounding landscape was in poor condition with an average entrenchment ratio of 1.4, indicating that the river has limited ability to spread laterally into its floodplain during times of high flow.

Physical Structure

Low habitat patch diversity was observed within the river and its floodplain. The channel and its floodplain substrate consisted primarily of fines. Of the seventeen patch types possible in a non-confined riverine wetland, only four were present (i.e., large woody debris, bank slumps, secondary channels, and organic debris on the floodplain), for only twenty-four percent of the expected number of classes. The cross sectional topographic complexity of the site identified steep banks present on both sides of the river, with minimal benching and some micro-topography on the downstream end of the AA.

Biotic Structure

The overall biotic structure at this location is of fair quality. The number of plant layers scored high, with four of the five possible plant layers present: short (<0.5 m), medium (0.5 m – 1.5 m), tall (1.5 m – 3.0 m), and very tall (>3.0 m). Eight co-dominant species were observed among all layers, including Mulefat (*Baccharis salicifolia*), California bulrush (*Scirpus californicus*), Arroyo willow (*Salix lasiolepis*), Black Willow (*Salix gooddingii*), Tamarisk (*Tamarix aphylla*), Giant Reed (*Arundo donax*), Nasturtium (*Tropaeolum majus*), and Elderberry (*Sambucus mexicana*). The tall and very tall strata dominated the site, with limited understory consisting primarily of small patches of Mulefat and Nasturtium. Of co-dominant species present, Salt Cedar, Giant Reed, and Nasturtium are considered invasive comprising thirty-eight percent of the plants present. The vertical biotic structure was fair, with approximately fifty percent overlap of two plant layers (Tall and Very Tall). The horizontal interspersions of plant zones is fair. The area was dominated by a homogeneous mixture of mulefat and willows, with no strong zoning pattern evident.

Potential Stressors

There was one hydrological stressor identified for TJ-PC-D AA: non-point source discharges; however, it was determined that this was not a significant negative impact on the water quality of the AA. The same five water quality stressors were identified as for the TJ-PC-U AA: bacterial pathogens, nutrients, heavy metals, and trash or refuse. While bacterial pathogens, heavy metals, and pesticides were not measured analytically as part of this study, the Tijuana River is considered impaired (303(d) listed) for all of these stressors, including nutrients and trash. Although these physical stressors were present, they were not considered to have a significant negative effect on the AA. The one biotic structure stressors identified was the lack of treatment of invasive plants. Potential landscape stressors within 500 m of the AA included helicopter traffic from the Naval Outlying Landing Field (NOLF) to the north, some horse paddocks to the northeast, nearby urban residential areas, dryland farming, and passive recreation in the form of hiking, none of which appeared likely to have a significant effect on the AA.

3.2.3 TJ-SG-U Site Assessment Area

The delineated area for the TJ-SG-U AA is depicted on Figure 2-4. A summary of CRAM scores for TJ-SG-U is presented in Table 3-2. The northern edge of the AA began approximately 10 m south of Monument Road and extended southward approximately 120 m. The location was characterized as an ephemeral stream in a non-confined setting. Water was not present within the AA at the time of the survey. The AA included the bankfull width of TJ-

SG-U and the lateral floodplain benches present. The approximate width of the AA ranged from 27 m to 44 m, with an average bankfull width of approximately 5.7 m.

Buffer and Landscape Context

The riparian continuity attribute extending 500 meters upstream and downstream of AA is in good condition. Both upstream and downstream riparian corridors provided good connectivity, with the only exception being Monument Road traversing the buffer downstream of the AA. There is a flow control structure 500 m south of the AA at the international border. The AA is bordered by one-hundred percent buffer, with the average buffer width being 188 m. The buffer condition was in poor to fair condition, primarily being driven by one side of the AA. The west side of the AA was bordered by undisturbed natural riparian scrub, while the buffer to the east consisted of a large open cleared and compacted lot. It appeared that this lot is not utilized often and wildlife would likely be able to move freely through it; however the quality of that habitat was subpar.

Hydrology

The water source was in fair to poor condition. The natural freshwater sources are substantially controlled by diversions upstream and a large portion of the watershed within 2 km upstream is in Mexico, dominated by commercial and residential land use. Channel stability was dominated by aggradation conditions, with the only sign of equilibrium being a well-defined bankfull contour. It appeared that large amounts of sediment likely inundate this area during storm events. The channel was filled with deep sand with the base of some vegetation covered along the bankfull contour. The overall stream bed is planar, with riparian vegetation encroaching into the channel, and the culvert at the downstream end of the AA is choked with sediment. Hydrologic connectivity to the surrounding landscape was good with an average entrenchment ratio of 2.3, indicating that the stream had some ability to access its surrounding floodplain during times of high flow.

Physical Structure

Habitat patch types were in poor condition. Of the seventeen habitat patch types possible in a non-confined riverine wetland, none were present within the channel or its floodplain. Topographic complexity of the site was fair with a flat stream channel, one bench, and some micro-topography present on the eastern floodplain in the form of vegetation and organic debris. Approximately 5 m beyond the eastern bank was a relatively steep sloping earthen berm (approx. 2.0 m high). The western bank consisted of a naturally steep hillside rising up to a mesa, with some micro-topography present.

Biotic Structure

The biotic structure at this location was mixed. The number of plant layers scored high with four of the five potential plant layers present: short (<0.5 m), medium (0.5 m – 1.5 m), tall (1.5 m – 3.0 m), and very tall (>3.0 m). Eight co-dominant species across the strata were observed, including Garland chrysanthemum (*Chrysanthemum coronarium*), Castor Bean (*Ricinis communis*), Black Willow (*Salix gooddingii*), Mulefat (*Baccharis salicifolia*), Giant Reed (*Arundo donax*), Eucalyptus (*Eucalyptus camaldulensis*), Tamarisk (*Tamarix aphylla*), and cocklebur (*Xanthium strumarium*). Of the eight co-dominant species identified, six (seventy-five percent) are considered invasives.

Horizontal interspersation was fair and vertical structure was poor. There was not much interspersation between the zones, and with the exception of Castor Bean which was found throughout, each generally occurred in only one area of the AA. Vertical biotic structure was considered poor. While four plant layers were present, there was little overlap among them.

Potential Stressors

There were three hydrological stressors identified for the TJ-SG-U AA; non-point source discharges, flow obstructions in the form of the culvert running underneath Monument Road, and the earthen berm on the right bank. There were four physical structure stressors that were identified for the AA: grading/compaction, excessive sediment or organic debris, excessive runoff from watershed, and trash or refuse. In addition, four water quality stressors (nutrients, heavy metals, pesticides or trace organics, and bacteria or pathogens) were presumed, as the primary water source for Smuggler's Gulch is runoff from Tijuana residential areas. These were all deemed to have a significant effect on the AA with the exception of grading/compaction. There was one biotic structure stressor identified; lack of treatment of invasive plants adjacent to AA or buffer and was determined to have a significant negative effect on the AA, due to the overwhelming presence of Castor Bean. Land use stressors include urban residential development, ranching (equestrian boarding lot), dryland farming, and active off-road vehicle usage (i.e., border patrol vehicles). Urban development was observed to likely have a significant effect due to the intense urbanization within the watershed south of the international border.

3.3 Benthic Biological Results

A list of taxa present in samples collected May 12, 2015 is presented in Table 3-3. Tables 3-4 and 3-5 present a summary of selected biological metrics.

3.3.1 BMI Community Composition

Total abundance of organisms among the three field replicates ranged from 370 to 405 individuals. In all three field replicates, *Chironomus* sp. was the dominant taxa observed, comprising 60 to 82 percent of the samples. This was followed by the gastropod *Tryonia* sp., Oligochaetes, and Ostracods. The top three taxa at each replicate were dominant, comprising 94 to 99 percent of the samples. The Chironomidae family is generally considered an insensitive group to anthropogenic influences (although a few species in this Family are considered sensitive), able to tolerate moderate to highly impacted locations. Some species within this group are able to tolerate high conductivity and can be found in estuarine locations (i.e. *Chironomus salinarius* and *Chironomus halophilus*). Dipteran Chironomids, or non-biting midge flies, are the most common aquatic insect and cover a range of feeding strategies from the construction of filtering nets, to simple grazing, to active predation. Most species are bottom-dwelling and many live within tubes or loosely constructed cases in the substrate. Some occur in highly polluted waters, others are restricted to cool clear water. Chironomidae are important indicator organisms, because the presence, absence, or quantities of various species within this Family can be a very good indicator of water quality. Oligochaetes are segmented aquatic worms, generally found in silty substrate and detritus of streams and rivers. While Oligochaetes can be found in both good quality and highly impacted streams, a stream population dominated by members of this Family is generally an indicator of poor conditions. An overabundance of

Oligochaeta can also be an indicator of sedimentation. Ostracods can be found in many different substrate types where they eat bacteria, mold, algae and detritus. Similar to Oligochaetes, Ostracods can be found across a full spectrum of water or habitat conditions; however, dominance by this group is generally an indicator of degraded conditions. These three taxa (*Chironomus*, Oligochaetes, and Ostracods) are generally considered tolerant taxa (Tolerance Value (TV) between 8 and 10), meaning they are relatively insensitive to anthropogenic stressors and are typically found in higher abundances at disturbed sites.

The genus *Tryonia* is a group of gastropods (snails) with a wide distribution. The genus contains 23 species and can be found across the southern United States. Although most *Tryonia* species are restricted to springs, which are generally thermal and highly mineralized, some also live in lakes (Thompson, 1968), and two species (*T. imitator* and *T. porrecta*) can be found in brackish, coastal waters (Kellogg, 1985; Hershler, 2007). Under SAFIT Level 2 standard taxonomic effort, *Tryonia* is generally left at the genus level, however further investigation was able to identify these individuals to *Tryonia imitator*, the California Brackish Water Snail. *Tryonia imitator* is a gastropod that inhabits coastal lagoons, estuaries and salt marshes, from Sonoma County south to San Diego County. While the California Natural Diversity Database (CNDDB) supported by the California Department of Fish & Wildlife (CDFW), does not list *Tryonia imitator* as a species of special concern, threatened, or endangered; it is designated as vulnerable due to its restricted range and relatively few populations.

Table 3-3. Raw Abundance of Individual Sorted Taxa for May 12, 2015 Field Survey

Taxonomic Group	Taxon	TJ-PC-D-051215-01	TJ-PC-D-051215-02	TJ-PC-D-051215-03
Diptera-Chironomidae	<i>Chironomus</i> sp.	239	320	244
Diptera-Tipuidae	<i>Molophilus</i> sp	1	1	1
	<i>Ormosia</i> sp	0	0	1
Mollusca-Cochliopidae	<i>Tryonia imitator</i>	70	64	142
Annelida-Oligochaeta	Oligochaeta	22	5	17
Crustacea-Ostracoda	Ostracoda	38	0	0
	TOTAL	370	390	405

Table 3-4. Select Biological Metrics for May 12, 2015 Field Survey

Biological Metric	TJ-PC-D-051215-01	TJ-PC-D-051215-02	TJ-PC-D-051215-03
# Organisms Sorted	370	390	405
# Organisms in the sample	370	390	405
Taxa Richness	5	4	5
1 st Dominant Taxa	<i>Chironomus</i> sp.	<i>Chironomus</i> sp.	<i>Chironomus</i> sp.
% Top Dominant Taxa	64.6	82.1	60.2
% 3 Top Dominant Taxa	93.8	99.7	99.5
% Tolerant Individuals (TV = 8 to 10)	74.9	82.1	60.2
% Intolerant Individuals (TV = 0 to 2)	0.0	0.0	0.0
% Sensitive EPT Taxa	0.0	0.0	0.0
Dominant FFG	Collector-Gatherer	Collector-Gatherer	Collector-Gatherer
Shannon Weaver Diversity Index (log10)	1.01	0.53	0.84
Mean Hilsenhoff Biotic Index	9.36	9.90	9.63

3.3.2 Diversity Metrics

Diversity metrics provide information regarding the number of taxa observed and the evenness of the distribution of individuals among those taxa (Washington 1984). Pristine ecosystems are typically expected to have a high diversity of invertebrate species with a relatively even distribution of organisms between those species. In contrast, degraded systems may consist of high numbers of individuals, but few taxa. A summary of the diversity metrics is presented in Table 3-4. The Shannon-Weaver Index (SWI) is a measure of diversity that evaluates the number of taxa and the evenness of distribution among them. Typically this index score is used to compare differences in diversity between several sites along a condition gradient, a potentially impacted site versus reference location, or temporal changes at a single location. While somewhat less informative when evaluated without context, the SWI can range from 0 to 4.6, with a score greater than 2.0 typically indicating a more diverse community. Diversity index scores calculated for the TJ-PC-D monitoring station, ranging from 0.53 to 1.01, indicate a benthic community with very low diversity and dominance by few species.

3.3.3 Sensitivity Metrics

The tolerance of many BMI taxa to habitat impairment and water quality has been determined through prior studies (Hilsenhoff, 1987). The Hilsenhoff Biotic Index (HBI) ranks BMI taxa on a scale of 0 to 10 regarding their sensitivity to impairment, with a TV of 0 being given to taxa that are highly sensitive to habitat or water quality impairment and a TV of 10 to those that are very insensitive. While organisms with a high TV can be found in streams with good water and habitat quality, they tend to be a lesser proportion of the community. Conversely, taxa with low TVs (i.e. sensitive organisms) will very rarely be found at sites with poor water or habitat quality. Although originally developed to assess low DO caused by organic loading (Hilsenhoff 1977, 1982, 1987), the HBI may also be sensitive to the effects of impoundment, thermal pollution, and some types of chemical pollution (Hilsenhoff 1988, Hooper 1993).

The average HBI score for taxa within the three field replicates ranged from 9.36 to 9.90, indicating very tolerant, insensitive organisms (Table 3-4). A high percentage of the individuals (range = 60.2 to 82.1%) were considered tolerant organisms (TV score 8 to 10), while no individuals considered intolerant to disturbance (TV score 0 to 2) were collected at this site.

Ephemeroptera, Plecoptera, and Trichoptera (EPT) taxa comprise a group of sensitive organisms, commonly known as EPT taxa, which are found worldwide and provide a good estimate of the water and habitat quality in a stream. While some of the taxa from this group are moderately insensitive to impairment, the majority are good indicators of community health. No EPT taxa were found at this site (Table 3-4).

3.3.4 Functional Feeding Groups

BMI may be grouped according to mode of feeding, referred to as Functional Feeding Groups (FFG). A healthy assemblage will typically contain a variety of FFGs, while dominance of the community by few FFGs suggests the stream may not support a diversity of ecological niches and may be general indicator of poor community health. The type and relative abundance of groups present can provide valuable insight with regard to ecological integrity, especially when considered with other assessment data.

A summary of the various FFG distributions obtained is presented in Table 3-5. The distribution of FFGs at the TJ-PC-D location was rather disproportionate. The collector-gatherer FFG contained the majority of taxa present, ranging from 65 to 83 percent among replicates. The collector-gatherer FFG is a subset of a larger collector group, comprised of collector-gatherers and collector-filterers. The collector-gatherers typically acquire fine particulate organic matter from the bottom by ingesting fine sediments, while the collector-filterers use mucous nets or fans to filter out fine particulate organic matter suspended in the passing water column. Both of these collectors are typically found in higher numbers in streams containing a high proportion of fines and sands.

Table 3-5. Percentages of Functional Feeding Groups for May 12, 2015 Field Survey

FFG	Field Replicate		
	TJ-PC-D-051215-01	TJ-PC-D-051215-02	TJ-PC-D-051215-03
Collectors FFG	80.9	83.3	64.7
Collector-Filterers subgroup	0.0	0.0	0.0
Collector-Gatherers subgroup	80.9	83.3	64.7
Predators FFG	0.0	0.0	0.0
Scrapers FFG	0.0	0.0	0.0
Shredders FFG	<0.1	<0.1	<0.1
Piercer-Herbivores FFG	0.0	0.0	0.0
Unclassified FFG	18.9	16.5	35.2

4.0 QUALITY ASSURANCE/QUALITY CONTROL

The data presented has been reviewed in accordance with the Amec Foster Wheeler internal quality assurance program and are deemed acceptable for reporting. Identified deviations from the protocol are discussed below, or are otherwise considered minor with no likely effect upon the assessment.

4.1 Analytical Water Chemistry

Due to elevated concentrations of several chemical constituents observed at the Tijuana River Pilot Channel sampling locations, dilutions were performed by the analytical laboratory in several instances, which then increased the MDL and RL for the diluted analytes. The elevated MDLs and RLs for the diluted samples are provided in Table 3-1 and Appendix Table B-1.

4.2 CRAM Monitoring

No QA/QC issues were encountered.

4.3 Benthic Macroinvertebrate Identification

Taxonomic identification and biotic metric calculations were performed by Amec Foster Wheeler. Quality Assurance measures included re-sorting a minimum of 20 percent of each sample to determine sorting efficacy. In addition, 10 percent of samples were completely re-sorted. Surface Water Ambient Monitoring Program (SWAMP) methods under the Standard Taxonomic Effort Level 2 requires sorting random aliquots of a sample until a minimum of $600 \pm 10\%$ individuals are obtained, or sorting the entire sample if <600 individuals are acquired. None of the samples reached the 600 individuals goal, and therefore the entire sample was sorted for each replicate.

5.0 SUMMARY

5.1 Summary

This report summarizes water quality, CRAM, and benthic biological results at three riverine wetland areas surrounding the annual dredge maintenance footprint for the Tijuana River Valley Channel Maintenance Project 09C-077. Two of the AAs were located upstream (TJ-PC-U and TJ-SG-U) of the dredging impact area and one AA was located downstream (TJ-PC-D) of the dredging impact area. Sampling was conducted on May 12, 2015.

5.1.1 Water Quality Monitoring

Water quality samples were collected at the upstream and downstream Pilot Channel locations only, as TJ-SG-U was dry for this monitoring event. The reported water quality results are summarized as follows:

- Nutrient concentrations were consistently higher at the upstream Pilot Channel location.
- Alkalinity and chloride were higher at the downstream Pilot Channel location, likely due to the tidal influence in this area.
- The chlorophyll-a concentration was higher at the downstream Pilot Channel location.
- The TSS concentration and turbidity at the upstream Pilot Channel location were 2.8 and 2.1 times higher, relative to the downstream location, respectively.
- DO was depressed at both Pilot Channel stations, however the upstream station had a severely depressed concentration.

5.1.2 CRAM Monitoring

CRAM was performed at all three monitoring locations. While there was some slight variability (one letter grade difference) among the individual attributes between sites, the overall AA scores for all three AAs monitored were relatively similar. The largest discrepancy among attributes was related to hydrologic connectivity, the only attribute with greater than 1 letter grade difference between sites. This was largely due to the improved hydrologic connectivity score at TJ-SG-U (see historical comparison section below) relative to prior monitoring events.

5.1.3 Sediment Infauna Biological Monitoring

Results from the sediment biological monitoring event indicate a benthic community that is highly tolerant to disturbance. The low diversity, high HBI scores, and overwhelming dominance of a single FFG point to a biological community that may be responding to one or more stressors. A location on the Tijuana River in close proximity to the downstream Pilot Channel station (Tijuana River at Saturn Blvd.) and at approximately the same elevation was monitored for freshwater invertebrates in May 2010 and May 2012 by the County of San Diego's copermittee receiving waters monitoring program (County of San Diego, 2011 and 2013). Taxa collected at this site showed a similar community structure, with tolerant Chironomid and

Oligochaete taxa together comprising 99 and 95 percent of the community, for those two monitoring events respectively.

The tidal influence present at the downstream Pilot Channel location likely affects the types of organisms that can survive there. Increased TDS/Conductivity is one of the factors used in generating the Hilsenhoff Tolerance Values (HBI scores). The limited community, with few taxa, and high average HBI score observed at this station may be indicative of stress due to fluctuations in salinity known to occur at that location (0.4 to 18 ppt) (see AMEC 2013), anthropogenic stressors, or a combination of both. While it is difficult to tease apart natural versus anthropogenic impacts to ambient conditions at a station with physical characteristics such as this, continued biological monitoring at this location in association with dredging operations will provide an assessment of the biological community and how it is changing in response to the ongoing maintenance dredging.

5.2 Historical comparison to prior monitoring events

Due to the limited amount of data collected thus far, it is difficult to make clear determinations of representative mean biological metrics, CRAM characteristics, or analytical concentrations at each station, trends in data, or whether meaningful statistical differences exist between the monitoring stations over time. As more data is collected, statistical analyses will become more meaningful in identifying trends over the course of the project. The following figures present current data along with data from the previous monitoring events to provide some context with which to view the various lines of data over the course of the project thus far, but are not meant to identify definitive trends. Any observed tendencies in the data at this point are purely observational.

Water Quality

The concentration of nutrients TKN, ortho-phosphate, total phosphorus, ammonia, nitrate, and nitrite have all been consistently elevated at the upstream Pilot Channel location across all monitoring events (Figures 4-1 and 4-2). Similarly, total suspended solids concentrations were greater at the upstream Pilot Channel for each monitoring event (Figure 4-3). When detected at the upstream Pilot Channel location (MDL >8.3 mg/L), chlorophyll-a concentrations have also been higher than those observed in the lower Pilot Channel (Figure 4-4). The two instances in which the chlorophyll-a concentration was higher at the downstream Pilot Channel location, pre-project (1/31/13) and annual ambient (5/12/15), occurred when it was not detected at the upstream Pilot Channel. However, in both of these cases the highest chlorophyll-a concentration at the downstream site was lower than any detected instance at the upstream Pilot Channel site.

During the one instance when upstream Smuggler's Gulch had water present (1/31/13), this location had a higher concentration of all nutrients than any other downstream Pilot Channel monitoring event. The only exception to this was nitrate and nitrite, which were observed at similar concentrations to the downstream Pilot Channel location. Total suspended solids concentration at Smuggler's Gulch were greater than or equal to four of the five monitoring events at the downstream Pilot Channel location. Chlorophyll-a was not detected (MDL <8.3 mg/L) at Smuggler's Gulch.

For in-situ water quality parameters measured in the field, turbidity at both upstream Pilot Channel and Smuggler’s Gulch were consistently elevated relative to that at the downstream Pilot Channel location (Figures 4-5 and 4-6). No other parameter exhibited any distinct pattern.

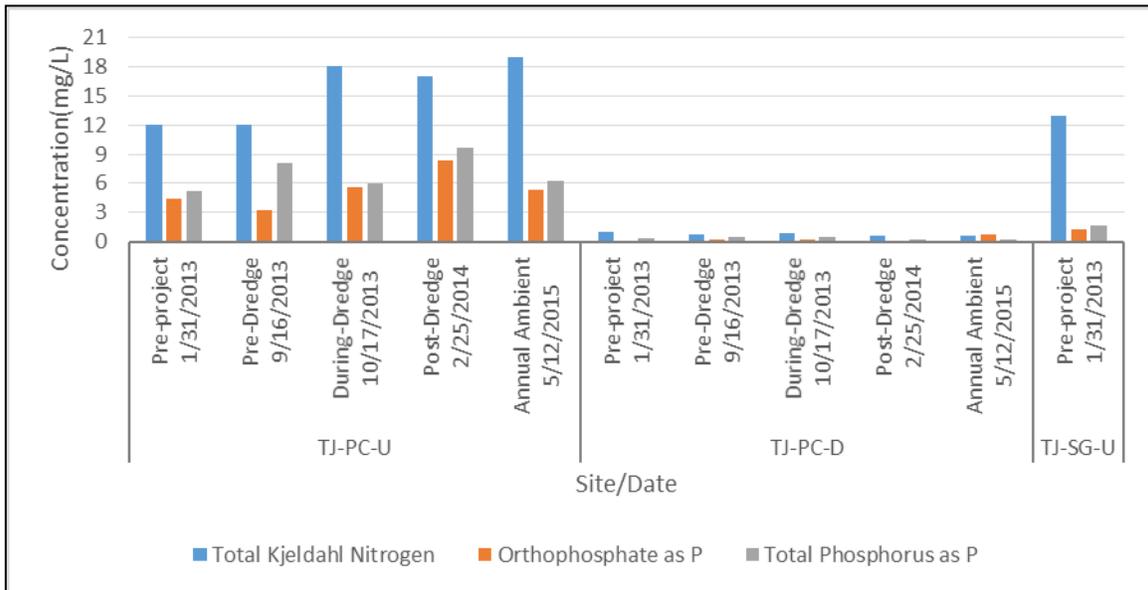


Figure 4-1. TKN, orthophosphate and total phosphorus concentrations across all stations and monitoring events.

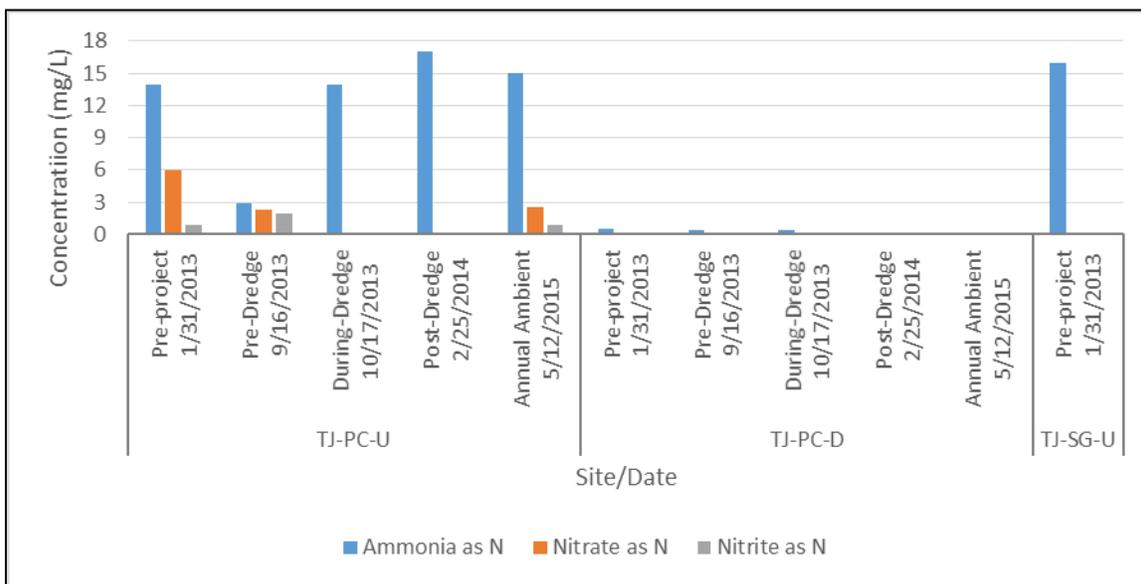


Figure 4-2. Ammonia, nitrate and nitrite concentrations across all stations and monitoring events.

Nitrite at TJ-SG-U (1/31/13) was non-detect. This was depicted as half of the method detection limit (i.e. 0.005 mg/L)

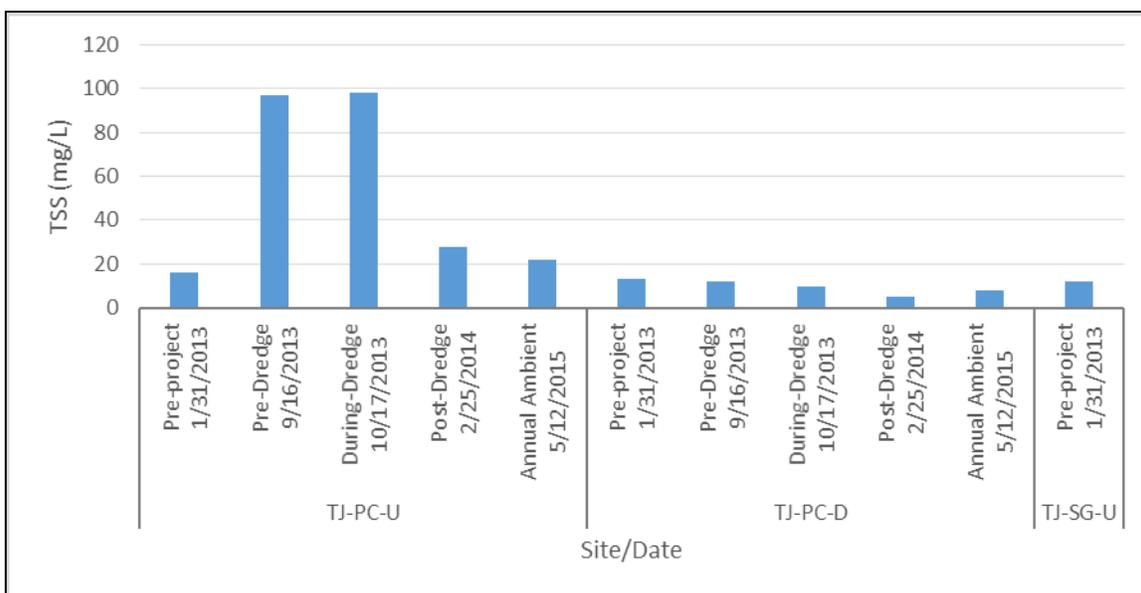


Figure 4-3. Total suspended solids concentrations across all stations and monitoring events.

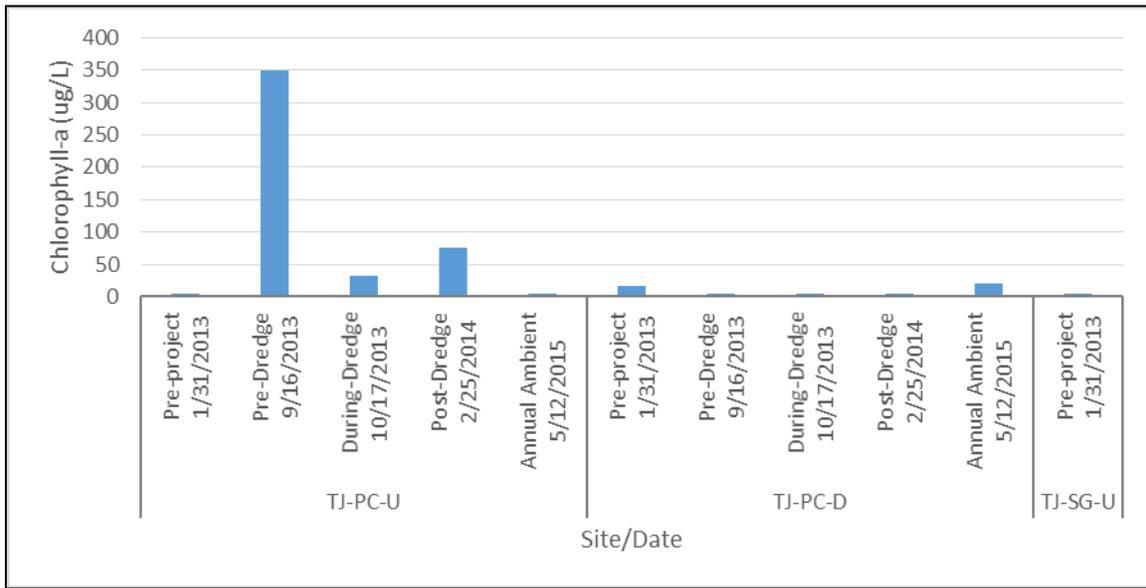


Figure 4-4. Chlorophyll-a concentrations across all stations and monitoring events.

TJ-PC-U (1/31/13, 5/12/15); TJ-PC-D (9/16/13, 10/17/13, 2/25/14); TJ-SG-U (1/31/13) were all non-detect. These are depicted as half of the method detection limit (i.e. 4.15 mg/L)

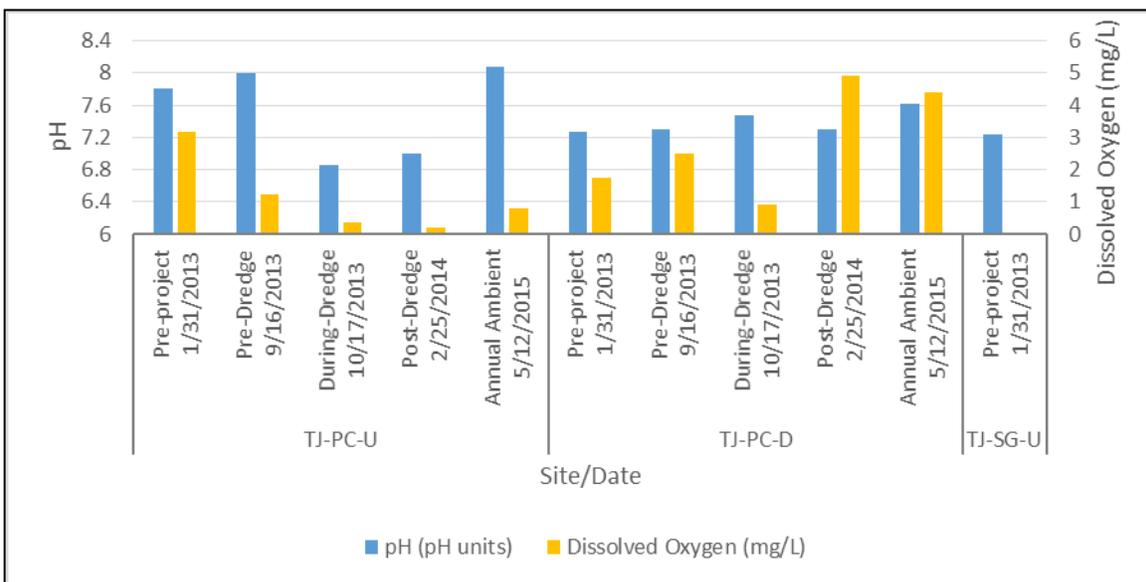


Figure 4-5. In-situ field water quality pH & DO measured across all stations and monitoring events.

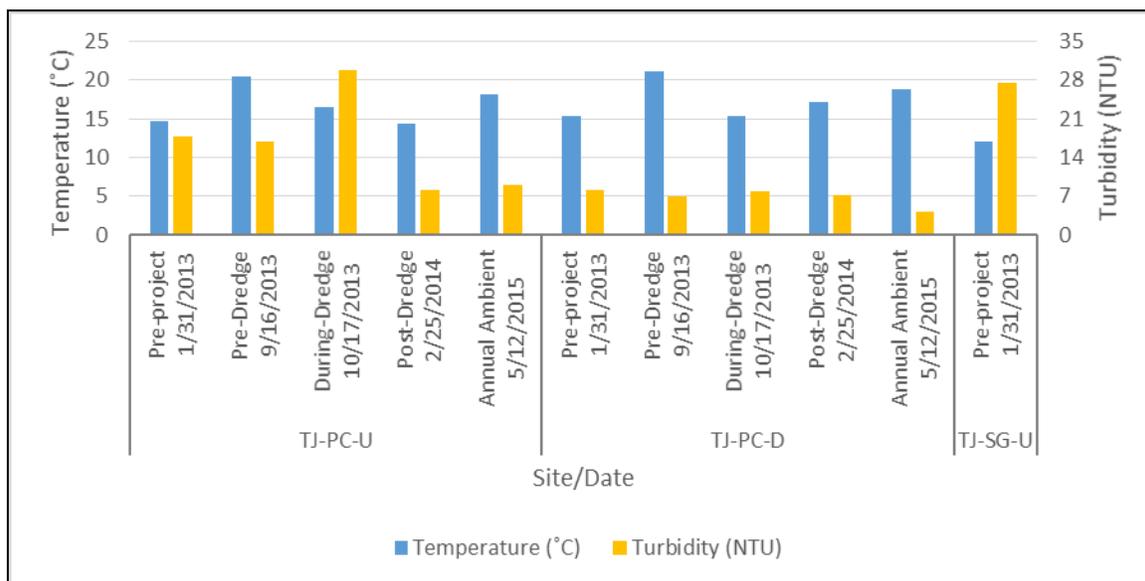


Figure 4-6. In-situ field water quality temperature & turbidity measured across all stations and monitoring events.

CRAM

The overall CRAM score at the upstream and downstream Pilot Channel locations were relatively similar across all monitoring events, and with the exception of the last event, were consistently elevated relative to that at the upstream Smuggler's Gulch location (Figure 4-7). The primary reason for the increased CRAM score at Smuggler's Gulch during the latest survey was an increase in the hydrology attribute score. This hydrology attribute score increased from a constant 41.7 over the previous four monitoring events, to 66.7 during the current survey. This increase in hydrology attribute score was primarily due to a larger entrenchment ratio, meaning the water had a greater ability to spread laterally outside of its bankfull width and into the floodplain than it had in previous events. The area for higher flows to spread laterally (i.e. the floodplain) is somewhat fixed at this site between a hillside to the west and an earthen berm to the east. The larger entrenchment ratio was a result of the bankfull width decreasing by over 50 percent from the previous three monitoring events, thereby increasing the entrenchment ratio.

Biological Infaunal Community

No discernable change in the benthic biological community was observed across monitoring events at the downstream Pilot Channel location (Figure 4-8). All events indicated low taxa richness and diversity scores, high HBI scores signifying a benthic community comprised of generally tolerant organisms, and no intolerant individuals present.

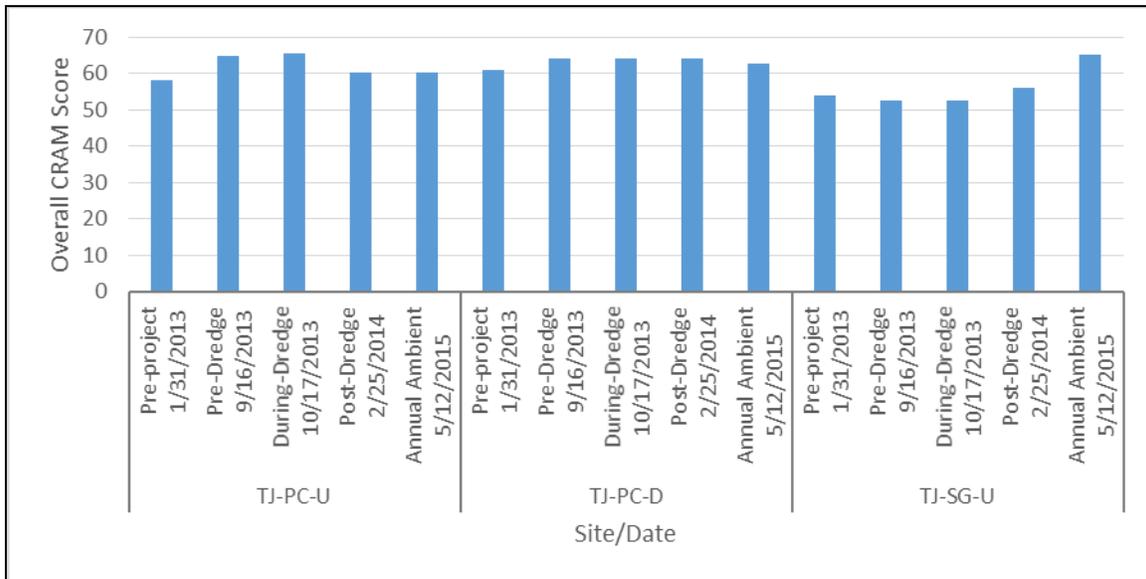


Figure 4-7. Overall CRAM scores across all stations and monitoring events.

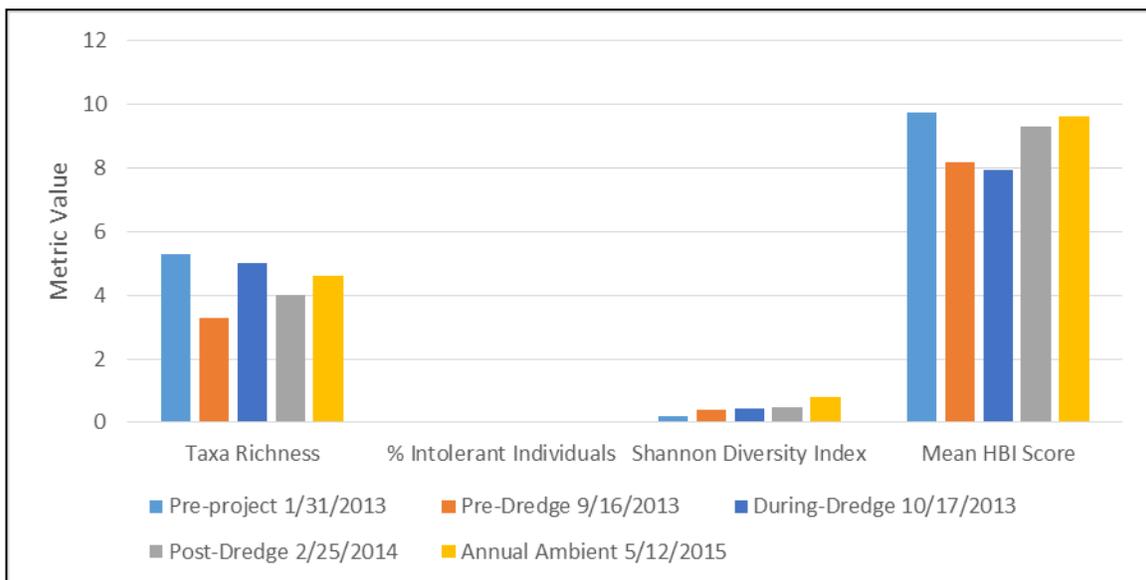


Figure 4-8. Selected biological metrics describing benthic the invertebrate community across all monitoring events of the downstream Pilot Channel location.

5.3 Next Steps

The monitoring program will begin again when the maintenance dredging program resumes, which is anticipated to occur in September 2015. Monitoring will continue to be performed in accordance with the provisions outlined in 401 Certification.

6.0 REFERENCES

- AMEC. 2013. Memo - Updates to Siting of Bioassessment Collections for the Tijuana River Receiving Water Dredge Maintenance Project. June 14.
- County of San Diego. 2011. San Diego County Municipal Copermittees 2009-2010 Urban Runoff Monitoring Final Report. Appendix G. Stream Bioassessment Monitoring Report. http://www.projectcleanwater.org/images/stories/Docs/MON/0910AR/0910_mon_appendix_g.pdf.
- County of San Diego. 2013. San Diego County Municipal Copermittees 2011-2012 Urban Runoff Monitoring Final Report. Appendix G. Stream Bioassessment Monitoring Report. http://www.projectcleanwater.org/images/stories/Docs/MON/0910AR/0910_mon_appendix_g.pdf.
- Hershler, R., C. Davis, C. Kitting, and H. Liu. 2007. Discovery of introduced and cryptogenic cochliopid gastropods in the San Francisco Estuary, California. *Journal of Molluscan Studies*. Vol. 73(4):323-332.
- Hilsenhoff, W.L. 1977. Use of arthropods to evaluate water quality of streams. *Tech. Bull. Wisconsin Dept. Nat. Resour.* 100. 15pp.
- Hilsenhoff, W.L. 1982. Using a Biotic Index to Evaluate Water Quality in Streams. *Tech. Bull. Wisc. Dept. Nat. Res.* 132p.
- Hilsenhoff, W.L. 1987. An improved biotic index of organic stream pollution. *The Great Lakes Entomologist* 20:31-37.
- Hilsenhoff, W.L. 1998. A modification of the biotic index of organic stream pollution to remedy problems and permit its use throughout the year. *Great Lakes Entomologist*. 33:1-12.
- Hooper, A. E. 1993. Effects of season, habitat, and an impoundment on twenty-five benthic community measures used to assess water quality. University of Wisconsin Stevens Point Master's Thesis.
- Kellogg, M.G. 1985. Contributions to our Knowledge of *Tryonia imitator* (Pilsbry, 1899). 78 pages. Master's thesis, Department of Biology, San Francisco State University, California.
- Southern California Coastal Water Research Project (SCCWRP). 2014. Sediment Quality Assessment, Final Technical Support Manual, Technical Report 777. January.
- SDRWQCB. 2012. Action on Request for Amendment to Clean Water Act Section 401 Water Quality Certification for Tijuana River Valley Channel Maintenance Project, 09C-077. April.

State Waters Resources Control Board (SWRCB)—California Environmental Protection Agency (SWRCB0Cal/EPA). 2009. Water Quality Control Plan for Enclosed Bays and Estuaries—Part 1 Sediment Quality. 25 August.

Thompson, F.G. 1968. The Aquatic Snails of the Family Hydrobiidae of Peninsular Florida, xv + 268 pages. Gainesville: University of Florida Press.

Washington, H.G. (1984). Diversity, biotic and similarity indices: a review with special relevance to aquatic ecosystems. *Water Research*. 18; 653-694.

APPENDIX A

PHOTO LOG



Photo 1

Tijuana River Pilot Channel Upstream Station – western end of AA looking downstream



Photo 2

Tijuana River Pilot Channel Upstream Station – western end of AA looking upstream



Photo 3

Tijuana River Pilot Channel Upstream Station – eastern end of AA looking upstream



Photo 4

Tijuana River Pilot Channel Upstream Station – eastern end of AA looking downstream



Photo 5

Tijuana River Pilot Channel Downstream Station – eastern end of AA looking upstream



Photo 6

Tijuana River Pilot Channel Downstream Station – eastern end of AA looking downstream



Photo 7

Tijuana River Pilot Channel Downstream Station – western end of AA looking downstream



Photo 8

Tijuana River Pilot Channel Downstream Station – western end of AA looking upstream



Photo 9

Smuggler's Gulch Upstream Station – northern end of AA looking upstream



Photo 10

Smuggler's Gulch Upstream Station – northern end of AA looking downstream



Photo 11

Smuggler's Gulch Upstream Station – southern end of AA looking downstream



Photo 12

Smuggler's Gulch Upstream Station – southern end of AA looking upstream

INTENTIONALLY LEFT BLANK

APPENDIX B

DILUTED SAMPLE METHOD DETECTION LIMITS AND REPORTING LIMITS

Table B-1. Ambient Monitoring Diluted Samples

Analyte	Units	Site							
		TJ-PC-U				TJ-PC-D			
		DF	MDL	RL	Result	DF	MDL	RL	Result
Chloride	mg/L	25	2.5	12	360	10	1.0	5.0	430
Ammonia as N	mg/L	50	2.4	5.0	15	-	-	-	-
OrthoPhosphate as P	µg/L	50	0.011	0.10	5.4	-	-	-	-
Nitrogen, Total Kjeldahl	mg/L	5	0.25	0.50	19	-	-	-	-
Total Phosphorus as P	mg/L	2	0.070	0.50	6.2	2	0.0028	0.020	0.23

Notes:

- DF - dilution factor
- RL - reporting limit
- MDL - method detection limit
- "-" - sample was not diluted

APPENDIX C
CRAM & FIELD SHEETS

May 12, 2015 SAMPLING EVENT

Basic Information Sheet: Riverine Wetlands

Assessment Area Name: <i>Smugglers Gulch Upstream</i>	
Project Name: <i>Tijuana River Dredge Monitoring</i>	
Assessment Area ID #:	
Project ID #:	Date: <i>5/12/15</i>
Assessment Team Members for This AA: <i>JR, TH</i>	
Average Bankfull Width: <i>5.7</i>	
Approximate Length of AA (10 times bankfull width, min 100 m, max 200 m): <i>150m</i>	
Upstream Point Latitude: <i>32.5425</i>	Longitude: <i>-117.0882</i>
Downstream Point Latitude: <i>32.5436</i>	Longitude: <i>-117.0884</i>
Wetland Sub-type:	
<input type="checkbox"/> Confined <input checked="" type="checkbox"/> Non-confined	
AA Category:	
<input type="checkbox"/> Restoration <input type="checkbox"/> Mitigation <input type="checkbox"/> Impacted <input checked="" type="checkbox"/> Ambient <input type="checkbox"/> Reference <input type="checkbox"/> Training	
<input checked="" type="checkbox"/> Other: <i>Dredge Material Monitoring</i>	
Did the river/stream have flowing water at the time of the assessment? <input type="checkbox"/> yes <input checked="" type="checkbox"/> no	
What is the apparent hydrologic flow regime of the reach you are assessing? The hydrologic flow regime of a stream describes the frequency with which the channel conducts water. <i>Perennial</i> streams conduct water all year long, whereas <i>ephemeral</i> streams conduct water only during and immediately following precipitation events. <i>Intermittent</i> streams are dry for part of the year, but conduct water for periods longer than ephemeral streams, as a function of watershed size and water source.	
<input type="checkbox"/> perennial <input type="checkbox"/> intermittent <input checked="" type="checkbox"/> ephemeral	

Photo Identification Numbers and Description:

	Photo ID No.	Description	Latitude	Longitude	Datum
1	59 60	Upstream			
2	57 58	Middle Left			
3		Middle Right			
4	55 56	Downstream			
5					
6	↓				
7	looking down	↓ looking up			
8					
9					
10					

Site Location Description:

Comments:

Scoring Sheet: Riverine Wetlands

AA Name: <i>Smugglers Gulch Upstream</i>			Date: <i>5/12/15</i>	
Attribute 1: Buffer and Landscape Context (pp. 11-19)			Comments	
Stream Corridor Continuity (D)	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer:				
Buffer submetric A: <i>Percent of AA with Buffer</i>	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer submetric B: <i>Average Buffer Width</i>	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Buffer submetric C: <i>Buffer Condition</i>	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Raw Attribute Score = $D + [C \times (A \times B)^{1/2}]^{1/2}$			<i>20.0</i>	Final Attribute Score = (Raw Score/24) x 100 <i>83.3</i>
Attribute 2: Hydrology (pp. 20-26)				
Water Source	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Channel Stability	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Hydrologic Connectivity	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Raw Attribute Score = sum of numeric scores			<i>24</i>	Final Attribute Score = (Raw Score/36) x 100 <i>66.7</i>
Attribute 3: Physical Structure (pp. 27-33)				
Structural Patch Richness	Alpha.	Numeric		
	<i>D</i>	<i>3</i>		
Topographic Complexity	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Raw Attribute Score = sum of numeric scores			<i>12</i>	Final Attribute Score = (Raw Score/24) x 100 <i>50.0</i>
Attribute 4: Biotic Structure (pp. 34-41)				
Plant Community Composition (based on sub-metrics A-C)				
Plant Community submetric A: <i>Number of plant layers</i>	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Plant Community submetric B: <i>Number of Co-dominant species</i>	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Plant Community submetric C: <i>Percent Invasion</i>	Alpha.	Numeric		
	<i>D</i>	<i>3</i>		
Plant Community Composition Metric <i>(numeric average of submetrics A-C)</i>			<i>7</i>	
Horizontal Interspersion	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Vertical Biotic Structure	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Raw Attribute Score = sum of numeric scores			<i>22</i>	Final Attribute Score = (Raw Score/36) x 100 <i>61.1</i>
Overall AA Score (average of four final Attribute Scores)			<i>65.3</i>	

Worksheet for Stream Corridor Continuity Metric for Riverine Wetlands

Lengths of Non-buffer Segments For Distance of 500 m Upstream of AA		Lengths of Non-buffer Segments For Distance of 500 m Downstream of AA	
Segment No.	Length (m)	Segment No.	Length (m)
1	0	1	10
2		2	10
3		3	
4		4	
5		5	
Upstream Total Length		Downstream Total Length	20

Percent of AA with Buffer Worksheet

In the space provided below make a quick sketch of the AA, or perform the assessment directly on the aerial imagery; indicate where buffer is present, estimate the percentage of the AA perimeter providing buffer functions, and record the estimate amount in the space provided.

Percent of AA with Buffer: 100 %

Worksheet for calculating average buffer width of AA

Line	Buffer Width (m)
A	75
B	150
C	150
D	145
E	250
F	
G	↓
H	
Average Buffer Width *Round to the nearest integer*	188

Worksheet for Assessing Channel Stability for Riverine Wetlands

Condition	Field Indicators (check all existing conditions)
1 Indicators of Channel Equilibrium	<ul style="list-style-type: none"> <input checked="" type="checkbox"/> The channel (or multiple channels in braided systems) has a well-defined bankfull contour that clearly demarcates an obvious active floodplain in the cross-sectional profile of the channel throughout most of the AA. <input type="checkbox"/> Perennial riparian vegetation is abundant and well established along the bankfull contour, but not below it. <input type="checkbox"/> There is leaf litter, thatch, or wrack in most pools (if pools are present). <input type="checkbox"/> The channel contains embedded woody debris of the size and amount consistent with what is naturally available in the riparian area. <input type="checkbox"/> There is little or no active undercutting or burial of riparian vegetation. <input type="checkbox"/> If mid-channel bars and/or point bars are present, they are not densely vegetated with perennial vegetation. <input type="checkbox"/> Channel bars consist of well-sorted bed material (smaller grain size on the top and downstream end of the bar, larger grain size along the margins and upstream end of the bar). <input type="checkbox"/> There are channel pools, the spacing between pools tends to be regular and the bed is not planar throughout the AA <input type="checkbox"/> The larger bed material supports abundant mosses or periphyton.
0 Indicators of Active Degradation	<ul style="list-style-type: none"> <input type="checkbox"/> The channel is characterized by deeply undercut banks with exposed living roots of trees or shrubs. <input type="checkbox"/> There are abundant bank slides or slumps. <input type="checkbox"/> The lower banks are uniformly scoured and not vegetated. <input type="checkbox"/> Riparian vegetation is declining in stature or vigor, or many riparian trees and shrubs along the banks are leaning or falling into the channel. <input type="checkbox"/> An obvious historical floodplain has recently been abandoned, as indicated by the age structure of its riparian vegetation. <input type="checkbox"/> The channel bed appears scoured to bedrock or dense clay. <input type="checkbox"/> Recently active flow pathways appear to have coalesced into one channel (i.e. a previously braided system is no longer braided). <input type="checkbox"/> The channel has one or more knickpoints indicating headward erosion of the bed.
5 Indicators of Active Aggradation	<ul style="list-style-type: none"> <input checked="" type="checkbox"/> There is an active floodplain with fresh splays of coarse sediment (sand and larger that is not vegetated) deposited in the current or previous year. <input checked="" type="checkbox"/> There are partially buried living tree trunks or shrubs along the banks. <input checked="" type="checkbox"/> The bed is planar (flat or uniform gradient) overall; it lacks well-defined channel pools, or they are uncommon and irregularly spaced. <input checked="" type="checkbox"/> There are partially buried, or sediment-choked, culverts. <input checked="" type="checkbox"/> Perennial terrestrial or riparian vegetation is encroaching into the channel or onto channel bars below the bankfull contour. <input type="checkbox"/> There are avulsion channels on the floodplain or adjacent valley floor.
Overall	<input type="checkbox"/> Equilibrium <input type="checkbox"/> Degradation <input checked="" type="checkbox"/> Aggradation

Riverine Wetland Entrenchment Ratio Calculation Worksheet

The following 5 steps should be conducted for each of 3 cross-sections located in the AA at the approximate midpoints along straight riffles or glides, away from deep pools or meander bends. An attempt should be made to place them at the top, middle, and bottom of the AA.

Steps	Replicate Cross-sections \longrightarrow	TOP	MID	BOT
m 1: Estimate bankfull width.	This is a critical step requiring familiarity with field indicators of the bankfull contour. Estimate or measure the distance between the right and left bankfull contours.	4.5	6.5	6.0
cm 2: Estimate max. bankfull depth.	Imagine a level line between the right and left bankfull contours; estimate or measure the height of the line above the thalweg (the deepest part of the channel).	5.0	5.0	5.0
cm 3: Estimate flood prone depth.	Double the estimate of maximum bankfull depth from Step 2.	10.0	10.0	10.0
m 4: Estimate flood prone width.	Imagine a level line having a height equal to the flood prone depth from Step 3; note where the line intercepts the right and left banks; estimate or measure the length of this line.	17.0	10.0	10.0
5: Calculate entrenchment ratio.	Divide the flood prone width (Step 4) by the bankfull width (Step 1).	3.8	1.5	1.7
6: Calculate average entrenchment ratio.	Calculate the average results for Step 5 for all 3 replicate cross-sections. Enter the average result here and use it in Table 13a or 13b.			2.3

Structural Patch Type Worksheet for Riverine wetlands

Circle each type of patch that is observed in the AA and enter the total number of observed patches in Table below. In the case of riverine wetlands, their status as confined or non-confined must first be determined (see page 6) to determine with patches are expected in the system (indicated by a "1" in the table below). Any feature onsite should only be counted once as a patch type. If a feature appears to meet the definition of more than one patch type (i.e. swale and secondary channel) the practitioner should choose which patch type best illustrates the feature. Not all features at a site will be patch types.


**Please refer to the CRAM Photo Dictionary at www.cramwetlands.org for photos of each of the following patch types.*

STRUCTURAL PATCH TYPE (circle for presence)	Riverine (Non-confined)	Riverine (Confined)
Minimum Patch Size	3 m ²	3 m ²
Abundant wrackline or organic debris in channel, on floodplain	1	1
Bank slumps or undercut banks in channels or along shoreline	1	1
Cobbles and/or Boulders	1	1
Debris jams	1	1
Filamentous macroalgae or algal mats	1	1
Large woody debris	1	1
Pannes or pools on floodplain	1	N/A
Plant hummocks and/or sediment mounds	1	1
Point bars and in-channel bars	1	1
Pools or depressions in channels (wet or dry channels)	1	1
Riffles or rapids (wet or dry channels)	1	1
Secondary channels on floodplains or along shorelines	1	N/A
Standing snags (at least 3 m tall)	1	1
Submerged vegetation	1	N/A
Swales on floodplain or along shoreline	1	N/A
Variiegated, convoluted, or crenulated foreshore (instead of broadly arcuate or mostly straight)	1	1
Vegetated islands (mostly above high-water)	1	N/A
Total Possible	17	12
No. Observed Patch Types (enter here and use in Table 14 below)	0	

none present

Worksheet for AA Topographic Complexity

At three locations along the AA, make a sketch of the profile of the stream from the AA boundary down to its deepest area then back out to the other AA boundary. Try to capture the benches and the intervening micro-topographic relief. To maintain consistency, make drawings at each of the stream hydrologic connectivity measurements, always facing downstream. Include the water level, an arrow at the bankfull contour, and label the benches. Based on these sketches and the profiles in Figure 10, choose a description in Table 16 that best describes the overall topographic complexity of the AA.

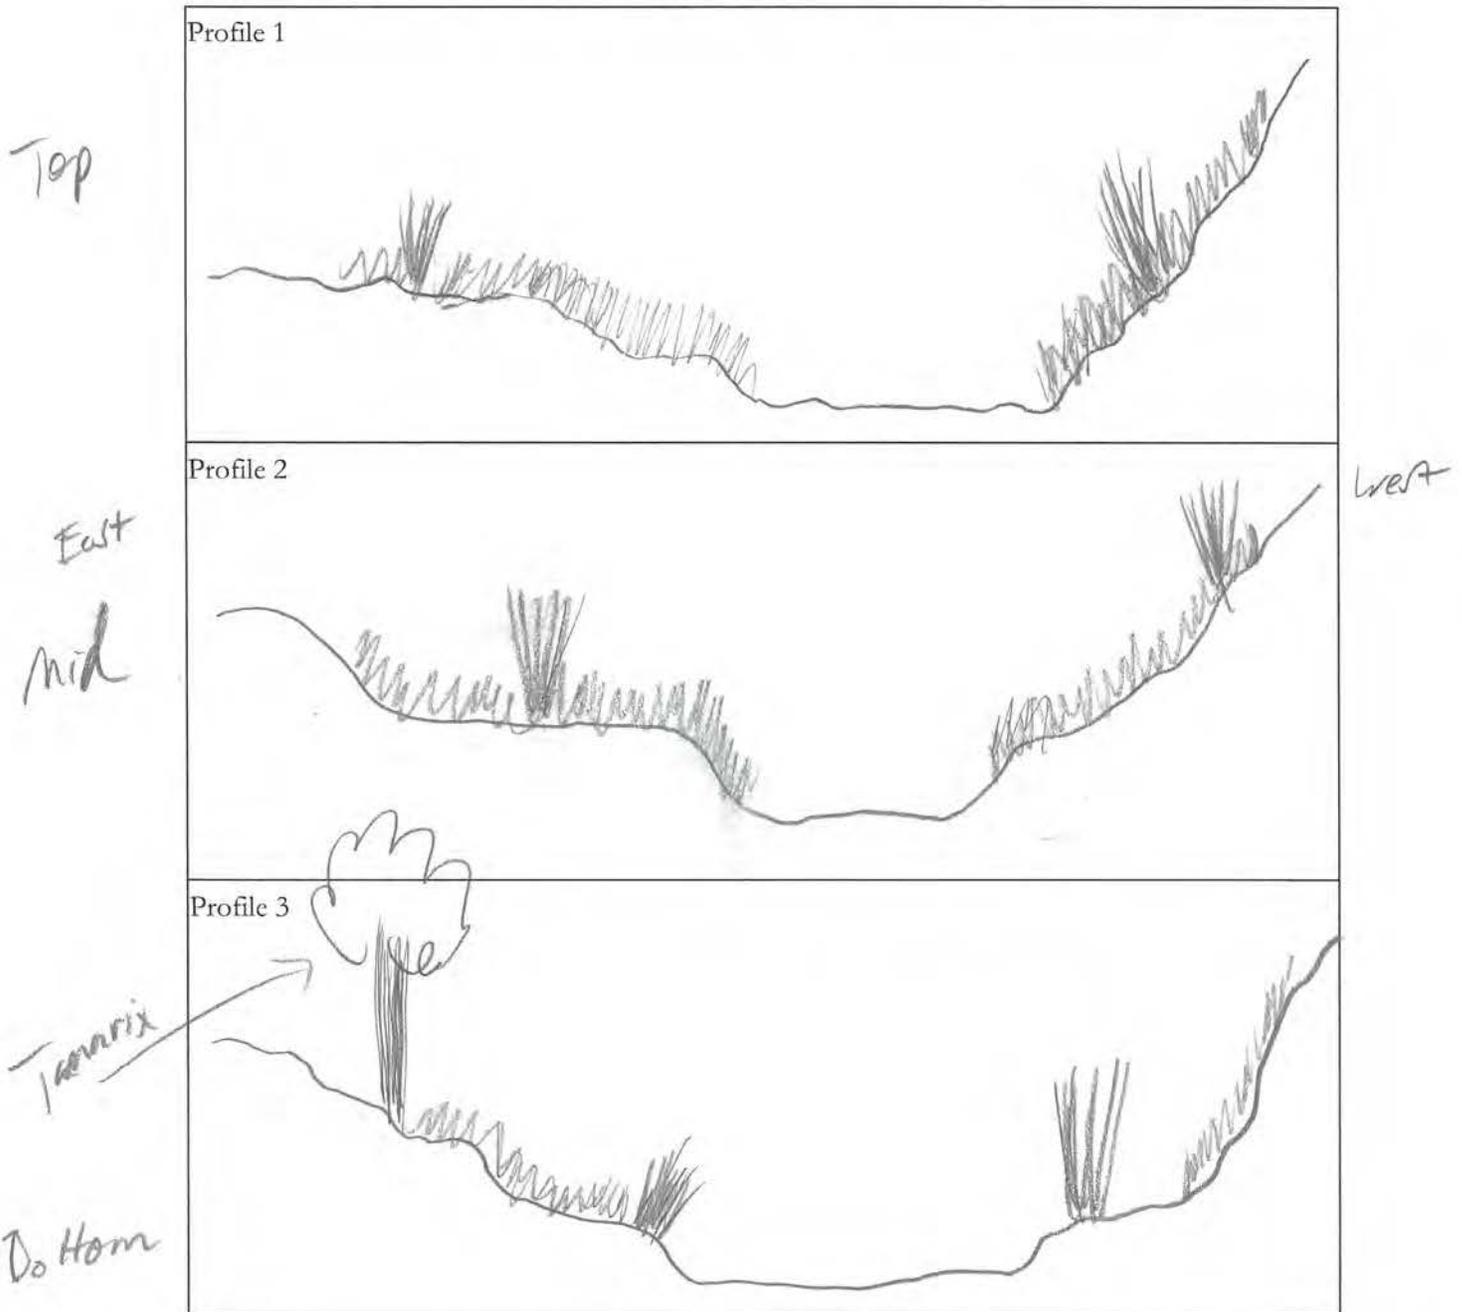

Plant Community Metric Worksheet: Co-dominant species richness for Riverine wetlands
 (A dominant species represents $\geq 10\%$ relative cover)

Special Note:

* Combine the counts of co-dominant species from all layers to identify the total species count. Each plant species is only counted once when calculating the Number of Co-dominant Species and Percent Invasion submetric scores, regardless of the numbers of layers in which it occurs.

Floating or Canopy-forming (non-confined only)		Invasive?	Short (<0.5 m)	Invasive?
			Bermuda Grass	Y
Medium (0.5-1.5 m)		Invasive?	Tall (1.5-3.0 m)	Invasive?
Xanthium strumarium	Cockleburr	Y	Mule fat	Y
	Gorland Chrysanthemum	Y		
Very Tall (>3.0 m)		Invasive?	Total number of co-dominant species for all layers combined (enter here and use in Table 18)	
	Castor Bean	Y	8	
	Tamarix	Y		
	Eucalyptus	Y	Percent Invasion *Round to the nearest integer* (enter here and use in Table 18)	75
	Black Willow	Y		
	Arundo	Y		

Cynodon dactylon

Baccharis salicifolia

Chrysanthemum coronarium

Ricinus communis

Tamarix aphylla

Arundo donax

Salix seedlingii

Eucalyptus camaldulensis

Horizontal Interspersion Worksheet.

Use the spaces below to make a quick sketch of the AA in plan view, outlining the major plant zones (this should take no longer than 10 minutes). Assign the zones names and record them on the right. Based on the sketch, choose a single profile from Figure 12 that best represents the AA overall.

East		West	<p>Assigned zones:</p> <ol style="list-style-type: none"> 1) Castor Bean 2) Tamarix 3) Willow 4) Chrysanthemum 5) Arruda 6) Eucalyptus

Worksheet for Wetland disturbances and conversions

Has a major disturbance occurred at this wetland?	Yes	<u>No</u>		
If yes, was it a flood, fire, landslide, or other?	flood	fire	landslide	other
If yes, then how severe is the disturbance?	likely to affect site next 5 or more years	likely to affect site next 3-5 years	likely to affect site next 1-2 years	
Has this wetland been converted from another type? If yes, then what was the previous type?	depressional	vernal pool	vernal pool system	
	non-confined riverine	confined riverine	seasonal estuarine	
	perennial saline estuarine	perennial non-saline estuarine	wet meadow	
	lacustrine	seep or spring	playa	

Stressor Checklist Worksheet

HYDROLOGY ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Point Source (PS) discharges (POTW, other non-stormwater discharge)		
Non-point Source (Non-PS) discharges (urban runoff, farm drainage)	X	X
Flow diversions or unnatural inflows		
Dams (reservoirs, detention basins, recharge basins)		
Flow obstructions (culverts, paved stream crossings)	X	X
Weir/drop structure, tide gates		
Dredged inlet/channel		
Engineered channel (riprap, armored channel bank, bed)		
Dike/levees	X	X
Groundwater extraction		
Ditches (borrow, agricultural drainage, mosquito control, etc.)		
Actively managed hydrology		
Comments		

PHYSICAL STRUCTURE ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Filling or dumping of sediment or soils (N/A for restoration areas)		
Grading/ compaction (N/A for restoration areas)	X	
Plowing/Discing (N/A for restoration areas)		
Resource extraction (sediment, gravel, oil and/or gas)		
Vegetation management		
Excessive sediment or organic debris from watershed	X	X
Excessive runoff from watershed	X	X
Nutrient impaired (PS or Non-PS pollution)	X	X
Heavy metal impaired (PS or Non-PS pollution)	X	X
Pesticides or trace organics impaired (PS or Non-PS pollution)	X	X
Bacteria and pathogens impaired (PS or Non-PS pollution)	X	X
Trash or refuse	X	X
Comments		

BIOTIC STRUCTURE ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Mowing, grazing, excessive herbivory (within AA)		
Excessive human visitation		
Predation and habitat destruction by non-native vertebrates (e.g., <i>Virginia opossum</i> and domestic predators, such as feral pets)		
Tree cutting/sapling removal		
Removal of woody debris		
Treatment of non-native and nuisance plant species		
Pesticide application or vector control		
Biological resource extraction or stocking (fisheries, aquaculture)		
Excessive organic debris in matrix (for vernal pools)		
Lack of vegetation management to conserve natural resources		
Lack of treatment of invasive plants adjacent to AA or buffer	X	X
Comments		

BUFFER AND LANDSCAPE CONTEXT ATTRIBUTE (WITHIN 500 M OF AA)	Present	Significant negative effect on AA
Urban residential	X	
Industrial/commercial		
Military training/Air traffic		
Dams (or other major flow regulation or disruption)		
Dryland farming		
Intensive row-crop agriculture	X	
Orchards/nurseries		
Commercial feedlots		
Dairies		
Ranching (enclosed livestock grazing or horse paddock or feedlot)	X	
Transportation corridor		
Rangeland (livestock rangeland also managed for native vegetation)		
Sports fields and urban parklands (golf courses, soccer fields, etc.)		
Passive recreation (bird-watching, hiking, etc.)	X	
Active recreation (off-road vehicles, mountain biking, hunting, fishing)		
Physical resource extraction (rock, sediment, oil/gas)		
Biological resource extraction (aquaculture, commercial fisheries)		
Comments		



5/12/15



N

Hollister St

Saturn Blvd

Monument Rd

TJ-SG-U

Google earth

Eye alt 1.20 km

© 2013 Google
© 2013 INEGI
Image U.S. Geological Survey

lat: 32.542642 lon: -117.088502 elev: 29 m

251 m

Imagery Date: 6/25/2008 1994



Basic Information Sheet: Riverine Wetlands

Assessment Area Name: <i>Tijuana River Upstream</i>	
Project Name: <i>TJ River Dredge</i>	
Assessment Area ID #: <i>AC-TJPEU-051215</i>	
Project ID #:	Date: <i>05/12/15</i>
Assessment Team Members for This AA:	
<i>JTR, TH</i>	
Average Bankfull Width: <i>17.3 m</i>	
Approximate Length of AA (10 times bankfull width, min 100 m, max 200 m): <i>160 m</i>	
Upstream Point Latitude: <i>32.5507</i> Longitude: <i>-117.0811</i>	
Downstream Point Latitude: <i>32.5512</i> Longitude: <i>-117.0826</i>	
Wetland Sub-type:	
<input type="checkbox"/> Confined <input checked="" type="checkbox"/> Non-confined	
AA Category:	
<input type="checkbox"/> Restoration <input type="checkbox"/> Mitigation <input type="checkbox"/> Impacted <input checked="" type="checkbox"/> Ambient <input type="checkbox"/> Reference <input type="checkbox"/> Training	
<input checked="" type="checkbox"/> Other: <i>Dredge Monitoring Impacts</i>	
Did the river/stream have flowing water at the time of the assessment? <input checked="" type="checkbox"/> yes <input type="checkbox"/> no	
What is the apparent hydrologic flow regime of the reach you are assessing? The hydrologic flow regime of a stream describes the frequency with which the channel conducts water. <i>Perennial</i> streams conduct water all year long, whereas <i>ephemeral</i> streams conduct water only during and immediately following precipitation events. <i>Intermittent</i> streams are dry for part of the year, but conduct water for periods longer than ephemeral streams, as a function of watershed size and water source.	
<input checked="" type="checkbox"/> perennial <input type="checkbox"/> intermittent <input type="checkbox"/> ephemeral	

Photo Identification Numbers and Description:

	Photo ID No.	Description	Latitude	Longitude	Datum
1	53 54	Upstream			
2	51	Middle Left			
3	52	Middle Right			
4	49, 50	Downstream			
5	↓ ↓				
6	looking down				
7	looking up				
8					
9					
10					

Site Location Description:

Comments:

After small rain event, about 96 hrs.
Sewage smell.

Scoring Sheet: Riverine Wetlands


AA Name: <i>TJ River Upstream</i>			Date: <i>5/12/15</i>	
Attribute 1: Buffer and Landscape Context (pp. 11-19)			Comments	
Stream Corridor Continuity (D)	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer:				
Buffer submetric A: <i>Percent of AA with Buffer</i>	Alpha.	Numeric		
	<i>A</i>	<i>A</i>		
Buffer submetric B: <i>Average Buffer Width</i>	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer submetric C: <i>Buffer Condition</i>	Alpha.	Numeric		
	<i>B</i>	<i>9</i>	<i>Some trails, evidence of human visitation, trash</i>	
Raw Attribute Score = $D + [C \times (A \times B)^{1/2}]^{1/2}$		<i>22.0</i>	Final Attribute Score = (Raw Score/24) x 100	<i>91.7</i>
Attribute 2: Hydrology (pp. 20-26)				
	Alpha.	Numeric		
Water Source	<i>C</i>	<i>6</i>		
Channel Stability	<i>B</i>	<i>9</i>		
Hydrologic Connectivity	<i>C</i>	<i>6</i>		
Raw Attribute Score = sum of numeric scores		<i>21.0</i>	Final Attribute Score = (Raw Score/36) x 100	<i>58.3</i>
Attribute 3: Physical Structure (pp. 27-33)				
	Alpha.	Numeric		
Structural Patch Richness	<i>D</i>	<i>3</i>		
Topographic Complexity	<i>C</i>	<i>6</i>		
Raw Attribute Score = sum of numeric scores		<i>9.0</i>	Final Attribute Score = (Raw Score/24) x 100	<i>37.5</i>
Attribute 4: Biotic Structure (pp. 34-41)				
Plant Community Composition (based on sub-metrics A-C)				
	Alpha.	Numeric		
Plant Community submetric A: <i>Number of plant layers</i>	<i>A</i>	<i>12</i>		
Plant Community submetric B: <i>Number of Co-dominant species</i>	<i>D</i>	<i>3</i>		
Plant Community submetric C: <i>Percent Invasion</i>	<i>C</i>	<i>6</i>		
Plant Community Composition Metric <i>(numeric average of submetrics A-C)</i>		<i>7</i>		
Horizontal Interspersion	<i>C</i>	<i>6</i>		
Vertical Biotic Structure	<i>C</i>	<i>6</i>		
Raw Attribute Score = sum of numeric scores		<i>19</i>	Final Attribute Score = (Raw Score/36) x 100	<i>52.8</i>
Overall AA Score (average of four final Attribute Scores)			<i>60.1</i>	

Worksheet for Stream Corridor Continuity Metric for Riverine Wetlands

Lengths of Non-buffer Segments For Distance of 500 m Upstream of AA		Lengths of Non-buffer Segments For Distance of 500 m Downstream of AA	
Segment No.	Length (m)	Segment No.	Length (m)
1	0	1	10
2		2	10
3	1	3	1
4		4	
5		5	
Upstream Total Length	0	Downstream Total Length	20

Percent of AA with Buffer Worksheet

In the space provided below make a quick sketch of the AA, or perform the assessment directly on the aerial imagery; indicate where buffer is present, estimate the percentage of the AA perimeter providing buffer functions, and record the estimate amount in the space provided.

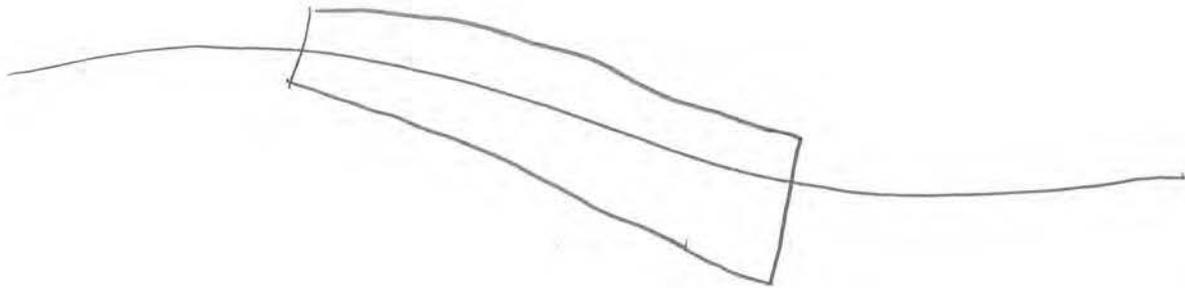

Percent of AA with Buffer: 100 %

Worksheet for calculating average buffer width of AA

Line	Buffer Width (m)
A	250
B	250
C	250
D	250
E	180
F	195
G	200
H	225
Average Buffer Width *Round to the nearest integer*	225

Worksheet for Assessing Channel Stability for Riverine Wetlands

Condition	Field Indicators (check all existing conditions)
<p>4</p> <p>Indicators of Channel Equilibrium</p>	<ul style="list-style-type: none"> <input checked="" type="checkbox"/> The channel (or multiple channels in braided systems) has a well-defined bankfull contour that clearly demarcates an obvious active floodplain in the cross-sectional profile of the channel throughout most of the AA. <input checked="" type="checkbox"/> Perennial riparian vegetation is abundant and well established along the bankfull contour, but not below it. <input checked="" type="checkbox"/> There is leaf litter, thatch, or wrack in most pools (if pools are present). <input checked="" type="checkbox"/> The channel contains embedded woody debris of the size and amount consistent with what is naturally available in the riparian area. <input checked="" type="checkbox"/> There is little or no active undercutting or burial of riparian vegetation. <input type="checkbox"/> If mid-channel bars and/or point bars are present, they are not densely vegetated with perennial vegetation. <input type="checkbox"/> Channel bars consist of well-sorted bed material (smaller grain size on the top and downstream end of the bar, larger grain size along the margins and upstream end of the bar). <input type="checkbox"/> There are channel pools, the spacing between pools tends to be regular and the bed is not planar throughout the AA <i>one big pool</i> <input type="checkbox"/> The larger bed material supports abundant mosses or periphyton.
<p>1</p> <p>Indicators of Active Degradation</p>	<ul style="list-style-type: none"> <input type="checkbox"/> The channel is characterized by deeply undercut banks with exposed living roots of trees or shrubs. <input type="checkbox"/> There are abundant bank slides or slumps. <input type="checkbox"/> The lower banks are uniformly scoured and not vegetated. <input checked="" type="checkbox"/> Riparian vegetation is declining in stature or vigor, or many riparian trees and shrubs along the banks are leaning or falling into the channel. <i>→ more trees down than previous effort</i> <input type="checkbox"/> An obvious historical floodplain has recently been abandoned, as indicated by the age structure of its riparian vegetation. <input type="checkbox"/> The channel bed appears scoured to bedrock or dense clay. <input type="checkbox"/> Recently active flow pathways appear to have coalesced into one channel (i.e. a previously braided system is no longer braided). <input type="checkbox"/> The channel has one or more knickpoints indicating headward erosion of the bed.
<p>2</p> <p>Indicators of Active Aggradation</p>	<ul style="list-style-type: none"> <input type="checkbox"/> There is an active floodplain with fresh splays of coarse sediment (sand and larger that is not vegetated) deposited in the current or previous year. <input checked="" type="checkbox"/> There are partially buried living tree trunks or shrubs along the banks. <input checked="" type="checkbox"/> The bed is planar (flat or uniform gradient) overall; it lacks well-defined channel pools, or they are uncommon and irregularly spaced. <i>one big pool</i> <input type="checkbox"/> There are partially buried, or sediment-choked, culverts. <input type="checkbox"/> Perennial terrestrial or riparian vegetation is encroaching into the channel or onto channel bars below the bankfull contour. <input type="checkbox"/> There are avulsion channels on the floodplain or adjacent valley floor.
<p>Overall</p>	<p><input checked="" type="checkbox"/> Equilibrium <input type="checkbox"/> Degradation <input type="checkbox"/> Aggradation</p>

Riverine Wetland Entrenchment Ratio Calculation Worksheet

The following 5 steps should be conducted for each of 3 cross-sections located in the AA at the approximate midpoints along straight riffles or glides, away from deep pools or meander bends. An attempt should be made to place them at the top, middle, and bottom of the AA.

Steps	Replicate Cross-sections →	TOP	MID	BOT
1 Estimate bankfull width.	This is a critical step requiring familiarity with field indicators of the bankfull contour. Estimate or measure the distance between the right and left bankfull contours.	18	17	17 m
2: Estimate max. bankfull depth.	Imagine a level line between the right and left bankfull contours; estimate or measure the height of the line above the thalweg (the deepest part of the channel).	2.5	2.0	2.5 m
3: Estimate flood prone depth.	Double the estimate of maximum bankfull depth from Step 2.	5.0	4.0	5.0 m
4: Estimate flood prone width.	Imagine a level line having a height equal to the flood prone depth from Step 3; note where the line intercepts the right and left banks; estimate or measure the length of this line.	28	25	29 m
5: Calculate entrenchment ratio.	Divide the flood prone width (Step 4) by the bankfull width (Step 1).	1.6	1.5	1.7
6: Calculate average entrenchment ratio.	Calculate the average results for Step 5 for all 3 replicate cross-sections. Enter the average result here and use it in Table 13a or 13b.	1.6		

estimate too deep and soft to see middle

Structural Patch Type Worksheet for Riverine wetlands

Circle each type of patch that is observed in the AA and enter the total number of observed patches in Table below. In the case of riverine wetlands, their status as confined or non-confined must first be determined (see page 6) to determine with patches are expected in the system (indicated by a "1" in the table below). Any feature onsite should only be counted once as a patch type. If a feature appears to meet the definition of more than one patch type (i.e. swale and secondary channel) the practitioner should choose which patch type best illustrates the feature. Not all features at a site will be patch types.


**Please refer to the CRAM Photo Dictionary at www.cramwetlands.org for photos of each of the following patch types.*

STRUCTURAL PATCH TYPE (circle for presence)	Riverine (Non-confined)	Riverine (Confined)
Minimum Patch Size	3 m ²	3 m ²
Abundant wrackline or organic debris in channel, on floodplain	1	1
Bank slumps or undercut banks in channels or along shoreline	1	1
Cobbles and/or Boulders	1	1
Debris jams	1	1
Filamentous macroalgae or algal mats	1	1
Large woody debris	1	1
Pannes or pools on floodplain	1	N/A
Plant hummocks and/or sediment mounds	1	1
Point bars and in-channel bars	1	1
Pools or depressions in channels (wet or dry channels)	1	1
Riffles or rapids (wet or dry channels)	1	1
Secondary channels on floodplains or along shorelines	1	N/A
Standing snags (at least 3 m tall)	1	1
Submerged vegetation	1	N/A
Swales on floodplain or along shoreline	1	N/A
Variiegated, convoluted, or crenulated foreshore (instead of broadly arcuate or mostly straight)	1	1
Vegetated islands (mostly above high-water)	1	N/A
Total Possible	17	12
No. Observed Patch Types (enter here and use in Table 14 below)	2	

Worksheet for AA Topographic Complexity

At three locations along the AA, make a sketch of the profile of the stream from the AA boundary down to its deepest area then back out to the other AA boundary. Try to capture the benches and the intervening micro-topographic relief. To maintain consistency, make drawings at each of the stream hydrologic connectivity measurements, always facing downstream. Include the water level, an arrow at the bankfull contour, and label the benches. Based on these sketches and the profiles in Figure 10, choose a description in Table 16 that best describes the overall topographic complexity of the AA.

North

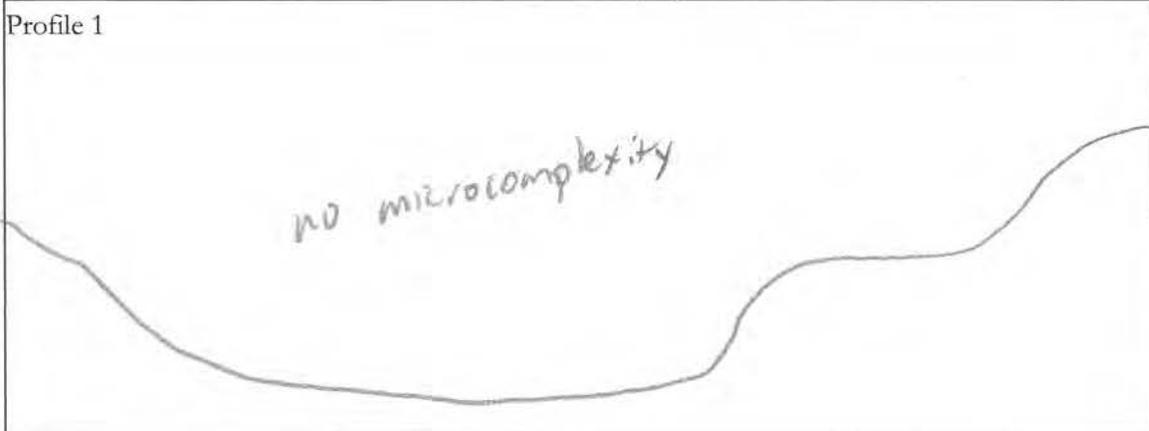

Plant Community Metric Worksheet: Co-dominant species richness for Riverine wetlands
 (A dominant species represents $\geq 10\%$ relative cover)

Special Note:

* Combine the counts of co-dominant species from all layers to identify the total species count. Each plant species is only counted once when calculating the Number of Co-dominant Species and Percent Invasion submetric scores, regardless of the numbers of layers in which it occurs.

Floating or Canopy-forming (non-confined only)	Invasive?	Short (<0.5 m)	Invasive?
		<i>Nasturtium</i>	Y
		<i>Castor Bean</i>	Y
none			
Medium (0.5-1.5 m)	Invasive?	Tall (1.5-3.0 m)	Invasive?
<i>Mulefat</i>	N	<i>Castor Bean</i>	Y
		<i>Mulefat</i>	N
Very Tall (>3.0 m)	Invasive?	Total number of co-dominant species for all layers combined (enter here and use in Table 18)	5
<i>Black Willow</i>	N		
<i>Arroyo Willow</i>	N		
<i>Castor Bean</i>	Y		
		Percent Invasion *Round to the nearest integer* (enter here and use in Table 18)	40

Tropaeolum majus

Ricinus communis

Baccharis salicifolia

Salix gooddingii

Salix lasiolepis

- lots of very young castor bean < 6"

Horizontal Interspersion Worksheet.

Use the spaces below to make a quick sketch of the AA in plan view, outlining the major plant zones (this should take no longer than 10 minutes). Assign the zones names and record them on the right. Based on the sketch, choose a single profile from Figure 12 that best represents the AA overall.

Willows throughout

Assigned zones:

- 1) *Cotton Bean*
- 2) *Willows*
- 3) *Mudflat*
- 4)
- 5)
- 6)

Worksheet for Wetland disturbances and conversions

Has a major disturbance occurred at this wetland?	Yes	<u>No</u>		
If yes, was it a flood, fire, landslide, or other?	flood	fire	landslide	other
If yes, then how severe is the disturbance?	likely to affect site next 5 or more years	likely to affect site next 3-5 years	likely to affect site next 1-2 years	
Has this wetland been converted from another type? If yes, then what was the previous type?	depressional	vernal pool	vernal pool system	
	non-confined riverine	confined riverine	seasonal estuarine	
	perennial saline estuarine	perennial non-saline estuarine	wet meadow	
	lacustrine	seep or spring	playa	

Stressor Checklist Worksheet

HYDROLOGY ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Point Source (PS) discharges (POTW, other non-stormwater discharge)		
Non-point Source (Non-PS) discharges (urban runoff, farm drainage)	X	X
Flow diversions or unnatural inflows		
Dams (reservoirs, detention basins, recharge basins)		
Flow obstructions (culverts, paved stream crossings)		
Weir/drop structure, tide gates		
Dredged inlet/channel		
Engineered channel (riprap, armored channel bank, bed)		
Dike/levees		
Groundwater extraction		
Ditches (borrow, agricultural drainage, mosquito control, etc.)		
Actively managed hydrology		
Comments		

PHYSICAL STRUCTURE ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Filling or dumping of sediment or soils (N/A for restoration areas)		
Grading/ compaction (N/A for restoration areas)		
Plowing/Discing (N/A for restoration areas)		
Resource extraction (sediment, gravel, oil and/or gas)		
Vegetation management		
Excessive sediment or organic debris from watershed		
Excessive runoff from watershed		
Nutrient impaired (PS or Non-PS pollution)	X	X
Heavy metal impaired (PS or Non-PS pollution)	X	X
Pesticides or trace organics impaired (PS or Non-PS pollution)	X	X
Bacteria and pathogens impaired (PS or Non-PS pollution)	X	X
Trash or refuse	X	X
Comments		

BIOTIC STRUCTURE ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Mowing, grazing, excessive herbivory (within AA)		
Excessive human visitation		
Predation and habitat destruction by non-native vertebrates (e.g., <i>Virginia opossum</i> and domestic predators, such as feral pets)		
Tree cutting/sapling removal		
Removal of woody debris		
Treatment of non-native and nuisance plant species		
Pesticide application or vector control		
Biological resource extraction or stocking (fisheries, aquaculture)		
Excessive organic debris in matrix (for vernal pools)		
Lack of vegetation management to conserve natural resources		
Lack of treatment of invasive plants adjacent to AA or buffer	X	X
Comments		

BUFFER AND LANDSCAPE CONTEXT ATTRIBUTE (WITHIN 500 M OF AA)	Present	Significant negative effect on AA
Urban residential	X	
Industrial/commercial		
Military training/Air traffic		
Dams (or other major flow regulation or disruption)		
Dryland farming		
Intensive row-crop agriculture		
Orchards/nurseries	X	
Commercial feedlots	X	
Dairies		
Ranching (enclosed livestock grazing or horse paddock or feedlot)	X	
Transportation corridor		
Rangeland (livestock rangeland also managed for native vegetation)		
Sports fields and urban parklands (golf courses, soccer fields, etc.)		
Passive recreation (bird-watching, hiking, etc.)	X	
Active recreation (off-road vehicles, mountain biking, hunting, fishing)		
Physical resource extraction (rock, sediment, oil/gas)		
Biological resource extraction (aquaculture, commercial fisheries)		
Comments		



5/12/15



N

Saturn Blvd

PC-UJ

Tijuana River Valley

Google earth

Eye alt: 1.11 km

© 2013 Google

Image © U.S. Geological Survey

© 2013 INEGI

lat: 32.551060 lon: -117.082195 elev: 6 m

Imagery Date: 2/29/2008 1994

250 m



Google earth


Eye alt 2.37 km

© 2013 Google
© 2013 INEGI
Image U.S. Geological Survey

lat 32.550924 lon -117.081387 elev 8 m

Imagery Date: 6/25/2008 1994

489 m

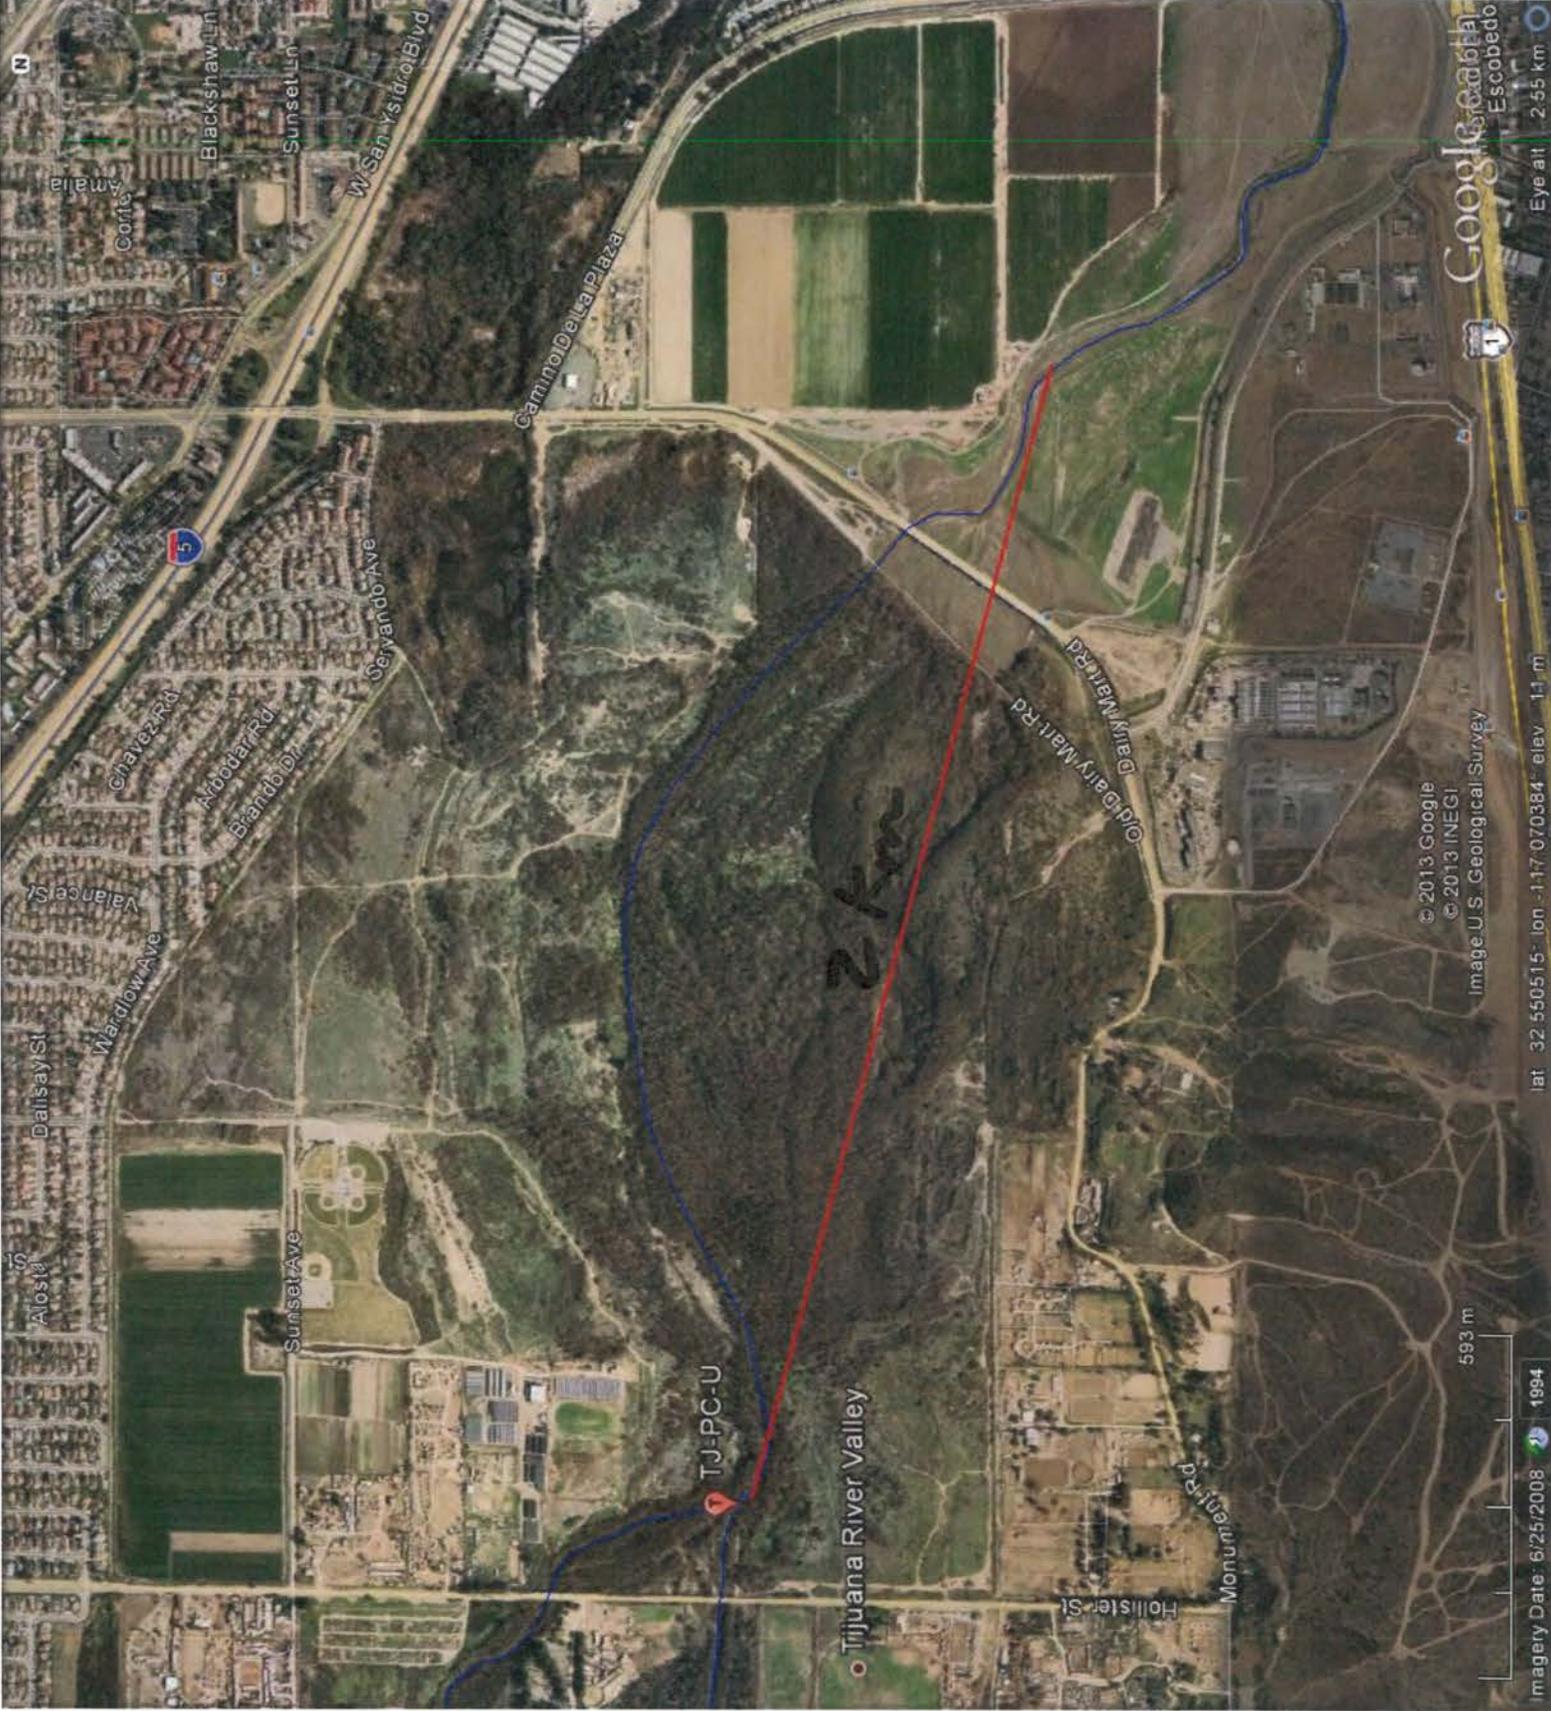

Alonso St
Dalisay St
Wardlow Ave
Valance St
Chavez Rd
Arbolar Rd
Brando Dr
Gervando Ave
Blackshaw Ln
Sunset Ln
W San Ysidro Blvd

Amalia
Corte

Sunset Ave

5

Camino Delta Plaza

TJ-PC-U

Tijuana River Valley

2 km

Old Dairy Mart Rd
Dairy Mart Rd

Hollister St
Monument Rd

Escobedo

© 2013 Google
© 2013 INEGI
Image U.S. Geological Survey

593 m

Imagery Date: 6/25/2008

1994

Eye alt: 2.55 km

Google Earth

lat: 32.550515 lon: -117.070384 elev: 1.1 m

Basic Information Sheet: Riverine Wetlands

Assessment Area Name: <i>Tijuana River - Downstream</i>	
Project Name: <i>Tijuana River Dredge</i>	
Assessment Area ID #: <i>AC-TVPCD-0512N</i>	
Project ID #:	Date: <i>5/12/15</i>
Assessment Team Members for This AA: <i>JR, TH</i>	
Average Bankfull Width: <i>5.3 m</i>	
Approximate Length of AA (10 times bankfull width, min 100 m, max 200 m): <i>100 m</i>	
Upstream Point Latitude: <i>32.5579</i>	Longitude: <i>-117.1035</i>
Downstream Point Latitude: <i>32.5576</i>	Longitude: <i>-117.1045</i>
Wetland Sub-type: <input type="checkbox"/> Confined <input checked="" type="checkbox"/> Non-confined	
AA Category: <input type="checkbox"/> Restoration <input type="checkbox"/> Mitigation <input type="checkbox"/> Impacted <input checked="" type="checkbox"/> Ambient <input type="checkbox"/> Reference <input type="checkbox"/> Training <input checked="" type="checkbox"/> Other: <i>Dredge Monitoring</i>	
Did the river/stream have flowing water at the time of the assessment? <input checked="" type="checkbox"/> yes <input type="checkbox"/> no	
<p>What is the apparent hydrologic flow regime of the reach you are assessing?</p> <p>The hydrologic flow regime of a stream describes the frequency with which the channel conducts water. <i>Perennial</i> streams conduct water all year long, whereas <i>ephemeral</i> streams conduct water only during and immediately following precipitation events. <i>Intermittent</i> streams are dry for part of the year, but conduct water for periods longer than ephemeral streams, as a function of watershed size and water source.</p> <input checked="" type="checkbox"/> perennial <input type="checkbox"/> intermittent <input type="checkbox"/> ephemeral	

Tidal Influence

Photo Identification Numbers and Description:

	Photo ID No.	Description	Latitude	Longitude	Datum
1	69 70	Upstream			
2		Middle Left			
3		Middle Right			
4	71 72	Downstream			
5					
6					
7					
8					
9					
10					

Site Location Description:

looking
down

looking
up

Comments:

Falling tide

Scoring Sheet: Riverine Wetlands

AA Name: <i>TJ River downstream</i>			Date: <i>5/12/15</i>	
Attribute 1: Buffer and Landscape Context (pp. 11-19)			Comments	
Stream Corridor Continuity (D)	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer:				
Buffer submetric A: <i>Percent of AA with Buffer</i>	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer submetric B: <i>Average Buffer Width</i>	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Buffer submetric C: <i>Buffer Condition</i>	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Raw Attribute Score = $D + [C \times (A \times B)^{1/2}]^{1/2}$			<i>22.0</i>	Final Attribute Score = (Raw Score/24) x 100 <i>91.7</i>
Attribute 2: Hydrology (pp. 20-26)				
Water Source	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Channel Stability	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Hydrologic Connectivity	Alpha.	Numeric		
	<i>D</i>	<i>3</i>		
Raw Attribute Score = sum of numeric scores			<i>18</i>	Final Attribute Score = (Raw Score/36) x 100 <i>50.0</i>
Attribute 3: Physical Structure (pp. 27-33)				
Structural Patch Richness	Alpha.	Numeric		
	<i>D</i>	<i>3</i>		
Topographic Complexity	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Raw Attribute Score = sum of numeric scores			<i>9</i>	Final Attribute Score = (Raw Score/24) x 100 <i>37.5</i>
Attribute 4: Biotic Structure (pp. 34-41)				
Plant Community Composition (based on sub-metrics A-C)				
Plant Community submetric A: <i>Number of plant layers</i>	Alpha.	Numeric		
	<i>A</i>	<i>12</i>		
Plant Community submetric B: <i>Number of Co-dominant species</i>	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Plant Community submetric C: <i>Percent Invasion</i>	Alpha.	Numeric		
	<i>C</i>	<i>6</i>		
Plant Community Composition Metric <i>(numeric average of submetrics A-C)</i>			<i>8</i>	
Horizontal Interspersion	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Vertical Biotic Structure	Alpha.	Numeric		
	<i>B</i>	<i>9</i>		
Raw Attribute Score = sum of numeric scores			<i>26</i>	Final Attribute Score = (Raw Score/36) x 100 <i>72.2</i>
Overall AA Score (average of four final Attribute Scores)			<i>62.8</i>	

Worksheet for Stream Corridor Continuity Metric for Riverine Wetlands

Lengths of Non-buffer Segments For Distance of 500 m Upstream of AA		Lengths of Non-buffer Segments For Distance of 500 m Downstream of AA	
Segment No.	Length (m)	Segment No.	Length (m)
1	0	1	0
2		2	
3		3	
4		4	
5		5	
Upstream Total Length	0	Downstream Total Length	0

Percent of AA with Buffer Worksheet

In the space provided below make a quick sketch of the AA, or perform the assessment directly on the aerial imagery; indicate where buffer is present, estimate the percentage of the AA perimeter providing buffer functions, and record the estimate amount in the space provided.

Percent of AA with Buffer: 100 %

Worksheet for calculating average buffer width of AA

Line	Buffer Width (m)
A	250
B	
C	
D	
E	
F	
G	
H	
Average Buffer Width *Round to the nearest integer*	250

Worksheet for Assessing Channel Stability for Riverine Wetlands

Condition	Field Indicators (check all existing conditions)
4 Indicators of Channel Equilibrium	<ul style="list-style-type: none"> <input checked="" type="checkbox"/> The channel (or multiple channels in braided systems) has a well-defined bankfull contour that clearly demarcates an obvious active floodplain in the cross-sectional profile of the channel throughout most of the AA. <input checked="" type="checkbox"/> Perennial riparian vegetation is abundant and well established along the bankfull contour, but not below it. <input checked="" type="checkbox"/> There is leaf litter, thatch, or wrack in most pools (if pools are present). <input checked="" type="checkbox"/> The channel contains embedded woody debris of the size and amount consistent with what is naturally available in the riparian area. <input type="checkbox"/> There is little or no active undercutting or burial of riparian vegetation. <input type="checkbox"/> If mid-channel bars and/or point bars are present, they are not densely vegetated with perennial vegetation. <input type="checkbox"/> Channel bars consist of well-sorted bed material (smaller grain size on the top and downstream end of the bar, larger grain size along the margins and upstream end of the bar). <input type="checkbox"/> There are channel pools, the spacing between pools tends to be regular and the bed is not planar throughout the AA <input checked="" type="checkbox"/> The larger bed material supports abundant mosses or periphyton.
4 Indicators of Active Degradation	<ul style="list-style-type: none"> <input checked="" type="checkbox"/> The channel is characterized by deeply undercut banks with exposed living roots of trees or shrubs. <input checked="" type="checkbox"/> There are abundant bank slides or slumps. <input checked="" type="checkbox"/> The lower banks are uniformly scoured and not vegetated. <input checked="" type="checkbox"/> Riparian vegetation is declining in stature or vigor, or many riparian trees and shrubs along the banks are leaning or falling into the channel. <input type="checkbox"/> An obvious historical floodplain has recently been abandoned, as indicated by the age structure of its riparian vegetation. <input type="checkbox"/> The channel bed appears scoured to bedrock or dense clay. <input type="checkbox"/> Recently active flow pathways appear to have coalesced into one channel (i.e. a previously braided system is no longer braided). <input type="checkbox"/> The channel has one or more knickpoints indicating headward erosion of the bed.
1 Indicators of Active Aggradation	<ul style="list-style-type: none"> <input type="checkbox"/> There is an active floodplain with fresh splays of coarse sediment (sand and larger that is not vegetated) deposited in the current or previous year. <input type="checkbox"/> There are partially buried living tree trunks or shrubs along the banks. <input checked="" type="checkbox"/> The bed is planar (flat or uniform gradient) overall; it lacks well-defined channel pools, or they are uncommon and irregularly spaced. <input type="checkbox"/> There are partially buried, or sediment-choked, culverts. <input type="checkbox"/> Perennial terrestrial or riparian vegetation is encroaching into the channel or onto channel bars below the bankfull contour. <input type="checkbox"/> There are avulsion channels on the floodplain or adjacent valley floor.
Overall	<input checked="" type="checkbox"/> Equilibrium <input checked="" type="checkbox"/> Degradation <input type="checkbox"/> Aggradation

Riverine Wetland Entrenchment Ratio Calculation Worksheet

The following 5 steps should be conducted for each of 3 cross-sections located in the AA at the approximate midpoints along straight riffles or glides, away from deep pools or meander bends. An attempt should be made to place them at the top, middle, and bottom of the AA.

Steps	Replicate Cross-sections →	TOP	MID	BOT
1 Estimate bankfull width.	This is a critical step requiring familiarity with field indicators of the bankfull contour. Estimate or measure the distance between the right and left bankfull contours.	3.0	7.0	6.0 m
2: Estimate max. bankfull depth.	Imagine a level line between the right and left bankfull contours; estimate or measure the height of the line above the thalweg (the deepest part of the channel).	0.6	0.8	0.8 m
3: Estimate flood prone depth.	Double the estimate of maximum bankfull depth from Step 2.	1.2	1.6	1.6 m
4: Estimate flood prone width.	Imagine a level line having a height equal to the flood prone depth from Step 3; note where the line intercepts the right and left banks; estimate or measure the length of this line.	5.2	8.5	8.0 m
5: Calculate entrenchment ratio.	Divide the flood prone width (Step 4) by the bankfull width (Step 1).	1.7	1.2	1.3
6: Calculate average entrenchment ratio.	Calculate the average results for Step 5 for all 3 replicate cross-sections. Enter the average result here and use it in Table 13a or 13b.			1.4

Structural Patch Type Worksheet for Riverine wetlands

Circle each type of patch that is observed in the AA and enter the total number of observed patches in Table below. In the case of riverine wetlands, their status as confined or non-confined must first be determined (see page 6) to determine with patches are expected in the system (indicated by a "1" in the table below). Any feature onsite should only be counted once as a patch type. If a feature appears to meet the definition of more than one patch type (i.e. swale and secondary channel) the practitioner should choose which patch type best illustrates the feature. Not all features at a site will be patch types.

**Please refer to the CRAM Photo Dictionary at www.cramwetlands.org for photos of each of the following patch types.*


STRUCTURAL PATCH TYPE (circle for presence)	Riverine (Non-confined)	Riverine (Confined)
Minimum Patch Size	3 m ²	3 m ²
Abundant wrackline or organic debris in channel, on floodplain	①	1
Bank slumps or undercut banks in channels or along shoreline	①	1
Cobbles and/or Boulders	1	1
Debris jams	1	1
Filamentous macroalgae or algal mats	1	1
Large woody debris	①	1
Pannes or pools on floodplain	1	N/A
Plant hummocks and/or sediment mounds	1	1
Point bars and in-channel bars	1	1
Pools or depressions in channels (wet or dry channels)	1	1
Riffles or rapids (wet or dry channels)	1	1
Secondary channels on floodplains or along shorelines	①	N/A
Standing snags (at least 3 m tall)	1	1
Submerged vegetation	1	N/A
Swales on floodplain or along shoreline	1	N/A
Variegated, convoluted, or crenulated foreshore (instead of broadly arcuate or mostly straight)	1	1
Vegetated islands (mostly above high-water)	1	N/A
Total Possible	17	12
No. Observed Patch Types (enter here and use in Table 14 below)	4	

newly tree fall
←

← one large pool, whole thing

Worksheet for AA Topographic Complexity

At three locations along the AA, make a sketch of the profile of the stream from the AA boundary down to its deepest area then back out to the other AA boundary. Try to capture the benches and the intervening micro-topographic relief. To maintain consistency, make drawings at each of the stream hydrologic connectivity measurements, always facing downstream. Include the water level, an arrow at the bankfull contour, and label the benches. Based on these sketches and the profiles in Figure 10, choose a description in Table 16 that best describes the overall topographic complexity of the AA.

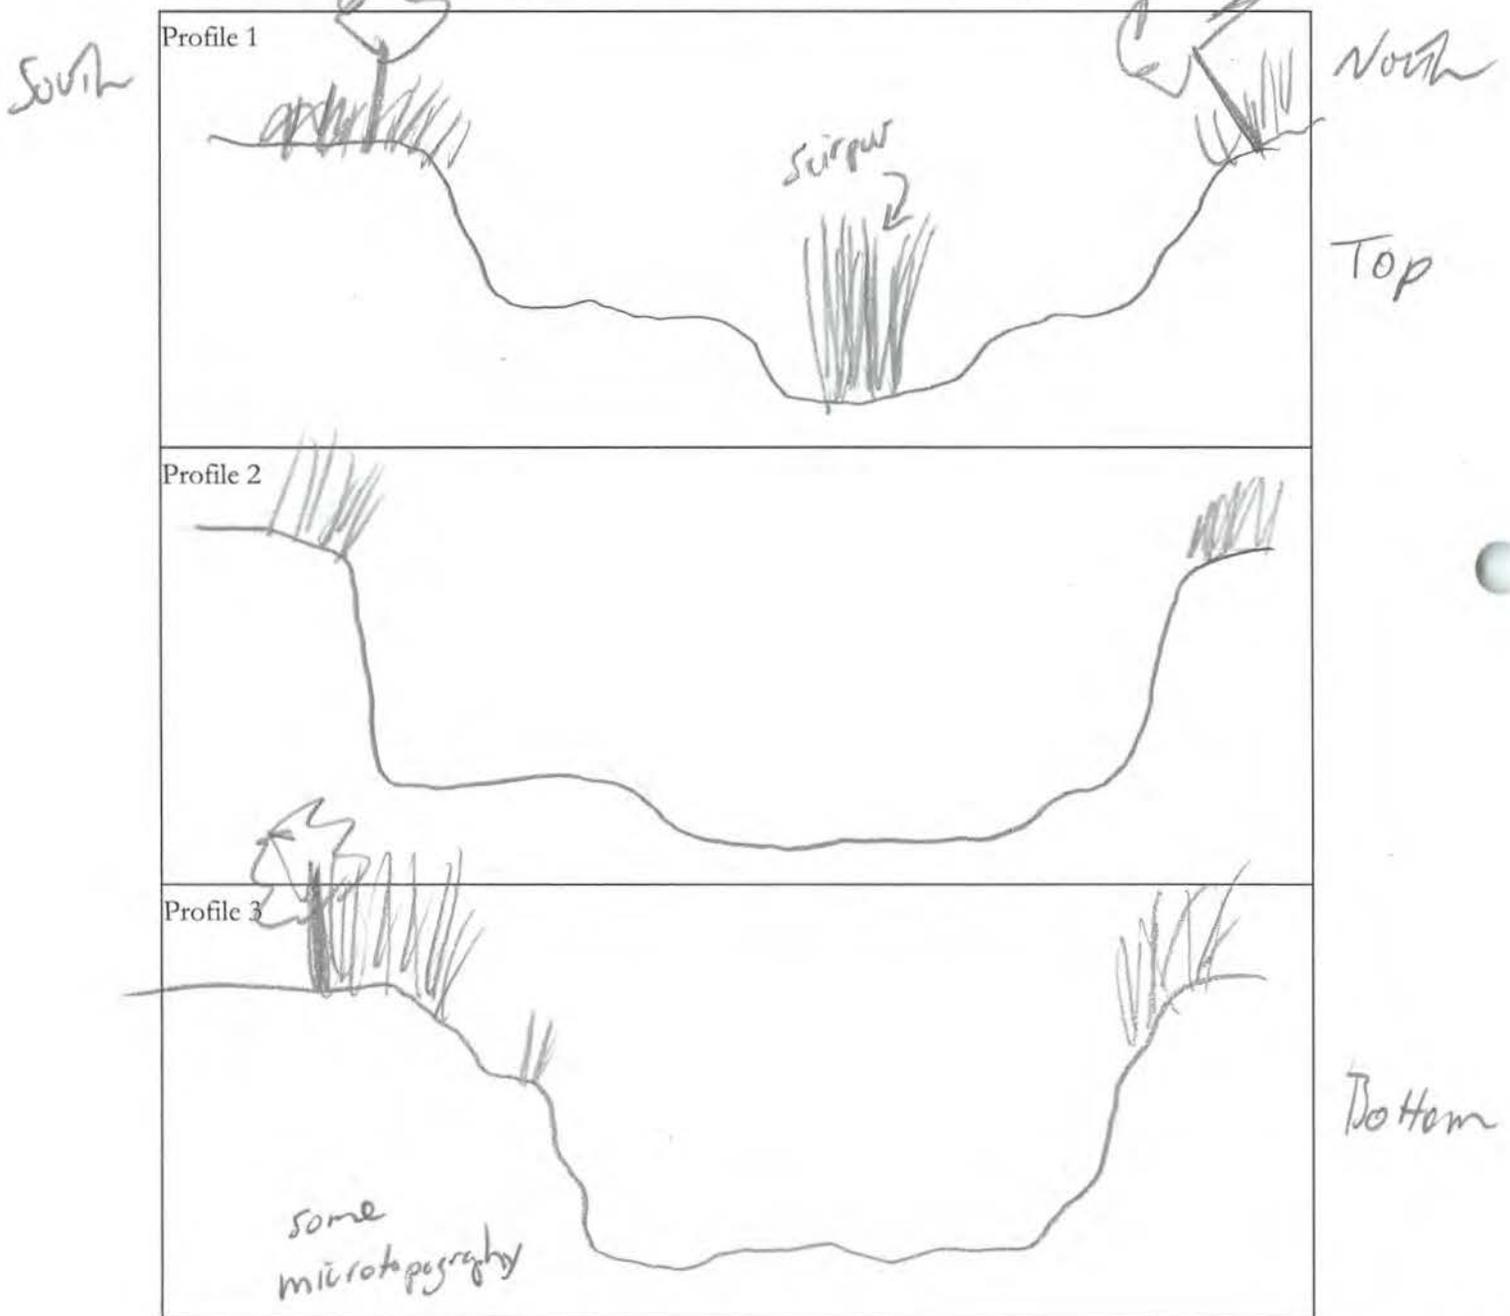

Plant Community Metric Worksheet: Co-dominant species richness for Riverine wetlands
 (A dominant species represents $\geq 10\%$ relative cover)

Special Note:

* Combine the counts of co-dominant species from all layers to identify the total species count. Each plant species is only counted once when calculating the Number of Co-dominant Species and Percent Invasion submetric scores, regardless of the numbers of layers in which it occurs.

Floating or Canopy-forming (non-confined only)	Invasive?	Short (<0.5 m)	Invasive?
none		Nasturtium	Y
Medium (0.5-1.5 m)	Invasive?	Tall (1.5-3.0 m)	Invasive?
mulefat	N	Scirpus californicus	N
		mulefat	N
Very Tall (>3.0 m)	Invasive?	Total number of co-dominant species for all layers combined (enter here and use in Table 18)	8
Arroyo Willow	N		
Tamarix	Y		
Arundo	Y		
Elderberry	N		
Black Willow	N		
		Percent Invasion *Round to the nearest integer* (enter here and use in Table 18)	38

Tropaneolum majus

Baccharis salicifolia

Salix lasiolepis

Tamarix aphylla


Arundo donax

Sambucus mexicana

Salix gooddingii

Horizontal Interspersion Worksheet.

Use the spaces below to make a quick sketch of the AA in plan view, outlining the major plant zones (this should take no longer than 10 minutes). Assign the zones names and record them on the right. Based on the sketch, choose a single profile from Figure 12 that best represents the AA overall.
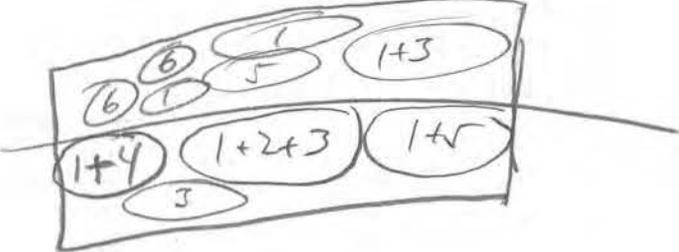
<p style="text-align: center; font-style: italic;">Willow background</p> 	<p>Assigned zones:</p> <ol style="list-style-type: none"> 1) Willow 2) Tamarix 3) Nuttall 4) Arundo 5) Nasturtium 6) Elderberry
--	--

Worksheet for Wetland disturbances and conversions

Has a major disturbance occurred at this wetland?	Yes	<u>No</u>		
If yes, was it a flood, fire, landslide, or other?	flood	fire	landslide	other
If yes, then how severe is the disturbance?	likely to affect site next 5 or more years	likely to affect site next 3-5 years	likely to affect site next 1-2 years	
Has this wetland been converted from another type? If yes, then what was the previous type?	depressional	vernal pool	vernal pool system	
	non-confined riverine	confined riverine	seasonal estuarine	
	perennial saline estuarine	perennial non-saline estuarine	wet meadow	
	lacustrine	seep or spring	playa	

Stressor Checklist Worksheet

HYDROLOGY ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Point Source (PS) discharges (POTW, other non-stormwater discharge)		
Non-point Source (Non-PS) discharges (urban runoff, farm drainage)	X	
Flow diversions or unnatural inflows		
Dams (reservoirs, detention basins, recharge basins)		
Flow obstructions (culverts, paved stream crossings)		
Weir/drop structure, tide gates		
Dredged inlet/channel		
Engineered channel (riprap, armored channel bank, bed)		
Dike/levees		
Groundwater extraction		
Ditches (borrow, agricultural drainage, mosquito control, etc.)		
Actively managed hydrology		
Comments		

PHYSICAL STRUCTURE ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Filling or dumping of sediment or soils (N/A for restoration areas)		
Grading/ compaction (N/A for restoration areas)		
Plowing/Discing (N/A for restoration areas)		
Resource extraction (sediment, gravel, oil and/or gas)		
Vegetation management		
Excessive sediment or organic debris from watershed		
Excessive runoff from watershed		
Nutrient impaired (PS or Non-PS pollution)	X	
Heavy metal impaired (PS or Non-PS pollution)	X	
Pesticides or trace organics impaired (PS or Non-PS pollution)	X	
Bacteria and pathogens impaired (PS or Non-PS pollution)	X	
Trash or refuse	X	
Comments		

BIOTIC STRUCTURE ATTRIBUTE (WITHIN 50 M OF AA)	Present	Significant negative effect on AA
Mowing, grazing, excessive herbivory (within AA)		
Excessive human visitation		
Predation and habitat destruction by non-native vertebrates (e.g., <i>Virginia opossum</i> and domestic predators, such as feral pets)		
Tree cutting/sapling removal		
Removal of woody debris		
Treatment of non-native and nuisance plant species		
Pesticide application or vector control		
Biological resource extraction or stocking (fisheries, aquaculture)		
Excessive organic debris in matrix (for vernal pools)		
Lack of vegetation management to conserve natural resources		
Lack of treatment of invasive plants adjacent to AA or buffer	<input checked="" type="checkbox"/>	
Comments		

BUFFER AND LANDSCAPE CONTEXT ATTRIBUTE (WITHIN 500 M OF AA)	Present	Significant negative effect on AA
Urban residential	<input checked="" type="checkbox"/>	
Industrial/commercial		
Military training/Air traffic	<input checked="" type="checkbox"/>	
Dams (or other major flow regulation or disruption)		
Dryland farming	<input checked="" type="checkbox"/>	
Intensive row-crop agriculture		
Orchards/nurseries		
Commercial feedlots		
Dairies		
Ranching (enclosed livestock grazing or horse paddock or feedlot)	<input checked="" type="checkbox"/>	
Transportation corridor		
Rangeland (livestock rangeland also managed for native vegetation)		
Sports fields and urban parklands (golf courses, soccer fields, etc.)		
Passive recreation (bird-watching, hiking, etc.)	<input checked="" type="checkbox"/>	
Active recreation (off-road vehicles, mountain biking, hunting, fishing)		
Physical resource extraction (rock, sediment, oil/gas)		
Biological resource extraction (aquaculture, commercial fisheries)		
Comments		



5/12/15

Google earth

Eye alt 663 m

lat 32.557665 lon -117.103246 elev 4 m

Imagery Date: 2/29/2008 1994

150m

© 2013 Google
© 2013 INEGI
Image U.S. Geological Survey

Sunset Ave

15th St

TJ-FC-D



N

15th St

Sunset Ave

TJ-PC-D

SODAN

KORAN

© 2013 Google
© 2013 INEGI
Image URL: Geological Survey

253 m

Imagery Date: 2/29/2008 1994

lat: 32.557604 lon: -117.103599 elev: 5 m

Google earth

Eye alt: 1.12 km



Google earth

Eye alt 2.20 km

lat 32.558347° lon -117.103440° elev 5 m

Imagery Date: 2/25/2008 1984

© 2013 Google
© 2013 INEGI
Image U.S. Geological Survey

501 m

TJ-PC-D

Saturn Blvd

Sunsat Ave

15th St

Boyd St

Wolviston Way
Royston Dr
Tama and Way
Ineborn Way
Tremaine Way
The Mal Ave
Bubbling Well Dr
Leon Ave

Saratoga St
Lexington St
Gallin St
York St



Eye alt 2:52 km

7 m

©2013 Google
Image U.S. Geological Survey

lat. 32.557246° lon. -117.092687° elev 1994

Imagery Date: 2/29/2008

Field Data Log Sheet

Site ID TJPC-U Watershed Tijuana Field Crew JR, TH Date 5/12/15
 Site-Specific Event # Wet Weather Dry Weather Time 0815

ATMOSPHERIC & OCEANIC CONDITIONS

Weather Sunny Partly Cloudy Overcast Fog Raining Drizzle
 Last Rain < 72 Hours < 72 Hours Rainfall None < 0.1" > 0.1"
 Tide High Mid Low Rising Falling
 Flow Flowing Ponded

SAMPLE CHARACTERISTICS

Odor None Musty Rotten Eggs Chemical Sewage Other _____
 Color None Yellow Brown White Gray Other _____
 Clarity Clear Slightly Cloudy Opaque Other _____
 Floatables None Trash Bubbles/Foam Sheen Other _____
 Deposits None Sediment/Gravel Fine Particles Stains Oily Deposits Other _____
 Vegetation None Limited Normal Excessive Other _____
 Biology None Insects Algae Snail Seaweed Mollusk Crustacean Other _____

FIELD MEASUREMENTS

Temp(°C) 18.2 Sp Conduct (µS/cm) 2354 pH 8.07
 Turbidity (NTU) 9.05 Salinity (ppt) 1.2 ppt DO (mg/L) 0.8

SAMPLE COLLECTION

Sample Type	Date	Time	Sample ID
Water	<u>5/12/15</u>	<u>0840</u>	<u>TJPCU-051215-01</u>

NOTES/COMMENTS

Fallen trees on path in to site

Field Data Log Sheet

Site ID TJPCD Watershed Tijuana Field Crew JR, TH Date 5/12/15
Site-Specific Event # Wet Weather Dry Weather Time 11:00

ATMOSPHERIC & OCEANIC CONDITIONS

Weather Sunny Partly Cloudy Overcast Fog Raining Drizzle
Last Rain > 72 Hours < 72 Hours Rainfall None < 0.1" > 0.1"
Tide High Mid Low Rising \uparrow Falling \downarrow
Flow Flowing Ponded

SAMPLE CHARACTERISTICS

Odor None Musty Rotten Eggs Chemical Sewage Other _____
Color None Yellow Brown White Gray Other _____
Clarity Clear Slightly Cloudy Opaque Other _____
Floatables None Trash Bubbles/Foam Sheen Other _____
Deposits None Sediment/Gravel Fine Particles Stains Oily Deposits Other _____
Vegetation None Limited Normal Excessive Other _____
Biology None Insects Algae Snail Seaweed Mollusk Crustacean Other _____

FIELD MEASUREMENTS

Temp(°C) 18.9 Sp Conduct (μ S/cm) 1491 pH 7.62
Turbidity (NTU) 4.28 Salinity (ppt) 0.75 DO (mg/L) 4.4

SAMPLE COLLECTION

Sample Type	Date	Time	Sample ID
Water	5/12/15	1200	TJPCD-051215-01
Water	5/12/15	1205	TJPCD-051215-02 Dup

NOTES/COMMENTS

Outgoing tide, high tide @ 4:41 am +4.4 ft

Sediment Sampling Fieldsheet for Tijuana River Estuary



Date: 5/12/2015

Personnel: JR, TH

Weather: Clear

Time / Height low tide: 11:22am : +0.2 feet

Time / Height high tide: 04:41 am : +4.4 feet

Station ID	Time	Grab #	Water Depth (m)	Penetration Depth (cm)	% Surface Intact	Overlying Water (Y/N)?	Acceptable (Y/N)?*	Sed Type	Color	Odor	Photo ID
TJPCD	1213	1	0.08	7	100	Y	Y	Sand	Grey	Sulfide	61, 62
TJPCD	1230	2	0.08m	6cm	100%	y	y	Sand	Grey	Sulfide	63, 64
TJPCD	1245	3	0.08m	6cm	100%	y	y	Sand	Grey	Sulfide	67, 68

65, 86

* Acceptability criteria: minimum 5-cm penetration, even sample surface, minimal disturbance/high % surface intact, overlying water present

** Record all grab attempts

Notes: Eckman Box Core

INTENTIONALLY LEFT BLANK

Appendix D

Analytical Laboratory Report

CERTIFICATE OF ANALYSIS

Client: AMEC Environment & Infrastructure 9177 Sky Park Court, Ste A San Diego CA, 92123	Report Date: 05/22/15 16:07
Attention: Kristina Schneider	Received Date: 05/13/15 11:10
Phone: (858) 278-3600	Turn Around: Normal
Fax: (858) 278-5300	Client Project: Tijuana River Receiver WatersMonitoring
Work Order(s): 5E13023	PO Number: 5025121037

NELAP #04229CA ELAP#1132 NEVADA #CA211 HAWAII LACSD #10143

The results in this report apply to the samples analyzed in accordance with the Chain of Custody document. Weck Laboratories, Inc. certifies that the test results meet all NELAC requirements unless noted in the case narrative. This analytical report is confidential and is only intended for the use of Weck Laboratories, Inc. and its client. This report contains the Chain of Custody document, which is an integral part of it, and can only be reproduced in full with the authorization of Weck Laboratories, Inc.

Dear Kristina Schneider :

Enclosed are the results of analyses for samples received 05/13/15 11:10 with the Chain of Custody document. The samples were received in good condition, at 2.9 °C and on ice. All analysis met the method criteria except as noted below or in the report with data qualifiers.

Case Narrative:

Reviewed by:

Hai Van Nguyen
Project Manager





AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Sampled by:	Lab ID	Matrix	Date Sampled
AC-TJPCD-051215-01	JR	5E13023-01	Water	05/12/15 12:00
AC-TJPCU-051215-01	JR	5E13023-02	Water	05/12/15 08:40
AC-TJPCD-051215-02	JR	5E13023-03	Water	05/12/15 12:05

ANALYSES

Anions by IC, EPA Method 300.0

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

5E13023-01 AC-TJPCD-051215-01

Sampled: 05/12/15 12:00

Sampled By: JR

Matrix: Water

Anions by IC, EPA Method 300.0

Method: EPA 300.0	Batch: W5E0648	Prepared: 05/13/15 12:00	Analyst: Alice T. Lee				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Chloride, Total	430	1.0	5.0	mg/l	10	05/13/15 16:06	

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods

Method: EPA 350.1	Batch: W5E0815	Prepared: 05/15/15 08:19	Analyst: Rebecca Juea Song				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Ammonia as N	0.19	0.048	0.10	mg/l	1	05/15/15 16:06	

Method: EPA 351.2	Batch: W5E0941	Prepared: 05/18/15 10:35	Analyst: Nina Katrina Reyes Aranas				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
TKN	0.63	0.050	0.10	mg/l	1	05/19/15 12:38	

Method: EPA 353.2	Batch: W5E0664	Prepared: 05/13/15 12:35	Analyst: Angela J Whittington				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Nitrate as N	0.057	0.041	0.10	mg/l	1	05/13/15 15:42	J
Nitrite as N	0.010	0.010	0.10	mg/l	1	05/13/15 20:31	J

Method: EPA 365.1	Batch: W5E0690	Prepared: 05/13/15 17:17	Analyst: Marilyn B Christian				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
o-Phosphate as P	0.076	0.0022	0.0020	mg/l	1	05/13/15 18:40	

Method: EPA 365.1	Batch: W5E1227	Prepared: 05/21/15 10:21	Analyst: Lin Chai				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Phosphorus as P, Total	0.23	0.0028	0.020	mg/l	2	05/22/15 10:47	

Method: SM 10200H	Batch: W5E0660	Prepared: 05/13/15 11:56	Analyst: Marilyn B Christian				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Chlorophyll-A	21	8.3	10	ug/l	1	05/22/15 12:19	

Method: SM 2320B	Batch: W5E0722	Prepared: 05/14/15 09:14	Analyst: Ashley J Partridge				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Alkalinity as CaCO3	550	0.56	10	mg/l	1	05/15/15 13:59	

Method: SM 2540D	Batch: W5E0824	Prepared: 05/15/15 10:16	Analyst: Lin Chai				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Total Suspended Solids	8		5	mg/l	1	05/15/15 12:01	



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

5E13023-02 AC-TJPCU-051215-01

Sampled: 05/12/15 08:40

Sampled By: JR

Matrix: Water

Anions by IC, EPA Method 300.0

Method: EPA 300.0	Batch: W5E0648	Prepared: 05/13/15 12:00					Analyst: Alice T. Lee
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Chloride, Total	360	2.5	12	mg/l	25	05/13/15 16:24	

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods

Method: EPA 350.1	Batch: W5E0815	Prepared: 05/15/15 08:19					Analyst: Rebecca Juea Song
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Ammonia as N	15	2.4	5.0	mg/l	50	05/15/15 16:18	

Method: EPA 351.2	Batch: W5E0941	Prepared: 05/18/15 10:35					Analyst: Nina Katrina Reyes Aranas
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
TKN	19	0.25	0.50	mg/l	5	05/19/15 16:27	

Method: EPA 353.2	Batch: W5E0664	Prepared: 05/13/15 12:35					Analyst: Angela J Whittington
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Nitrate as N	2.6	0.041	0.10	mg/l	1	05/13/15 15:44	
Nitrite as N	0.93	0.010	0.10	mg/l	1	05/13/15 20:32	

Method: EPA 365.1	Batch: W5E0690	Prepared: 05/13/15 17:17					Analyst: Marilyn B Christian
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
o-Phosphate as P	5.4	0.011	0.10	mg/l	50	05/13/15 18:50	

Method: EPA 365.1	Batch: W5E1227	Prepared: 05/21/15 10:21					Analyst: Lin Chai
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Phosphorus as P, Total	6.2	0.070	0.50	mg/l	2	05/22/15 10:51	M-06

Method: SM 10200H	Batch: W5E0660	Prepared: 05/13/15 11:56					Analyst: Marilyn B Christian
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Chlorophyll-A	ND	8.3	10	ug/l	1	05/22/15 12:19	

Method: SM 2320B	Batch: W5E0722	Prepared: 05/14/15 09:14					Analyst: Ashley J Partridge
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Alkalinity as CaCO3	360	0.56	10	mg/l	1	05/15/15 13:59	

Method: SM 2540D	Batch: W5E0824	Prepared: 05/15/15 10:16					Analyst: Lin Chai
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Total Suspended Solids	22		5	mg/l	1	05/15/15 12:01	



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

5E13023-03 AC-TJPCD-051215-02

Sampled: 05/12/15 12:05

Sampled By: JR

Matrix: Water

Anions by IC, EPA Method 300.0

Method: EPA 300.0	Batch: W5E0648	Prepared: 05/13/15 12:00	Analyst: Alice T. Lee				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Chloride, Total	410	2.5	12	mg/l	25	05/13/15 16:43	

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods

Method: EPA 350.1	Batch: W5E0815	Prepared: 05/15/15 08:19	Analyst: Rebecca Juea Song				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Ammonia as N	0.17	0.048	0.10	mg/l	1	05/15/15 16:18	

Method: EPA 351.2	Batch: W5E0941	Prepared: 05/18/15 10:35	Analyst: Nina Katrina Reyes Aranas				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
TKN	0.74	0.050	0.10	mg/l	1	05/19/15 12:42	

Method: EPA 353.2	Batch: W5E0664	Prepared: 05/13/15 12:35	Analyst: Angela J Whittington				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Nitrate as N	0.050	0.041	0.10	mg/l	1	05/13/15 15:46	J
Nitrite as N	0.016	0.010	0.10	mg/l	1	05/13/15 20:32	J

Method: EPA 365.1	Batch: W5E0690	Prepared: 05/13/15 17:17	Analyst: Marilyn B Christian				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
o-Phosphate as P	0.076	0.00022	0.0020	mg/l	1	05/13/15 18:46	

Method: EPA 365.1	Batch: W5E1227	Prepared: 05/21/15 10:21	Analyst: Lin Chai				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Phosphorus as P, Total	0.37	0.0070	0.050	mg/l	5	05/22/15 10:53	

Method: SM 10200H	Batch: W5E0660	Prepared: 05/13/15 11:56	Analyst: Marilyn B Christian				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Chlorophyll-A	28	8.3	10	ug/l	1	05/22/15 12:19	

Method: SM 2320B	Batch: W5E0722	Prepared: 05/14/15 09:14	Analyst: Ashley J Partridge				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Alkalinity as CaCO3	530	0.56	10	mg/l	1	05/15/15 13:59	

Method: SM 2540D	Batch: W5E0824	Prepared: 05/15/15 10:16	Analyst: Lin Chai				
Analyte	Result	MDL	MRL	Units	Dil	Analyzed	Qualifier
Total Suspended Solids	35		5	mg/l	1	05/15/15 12:01	



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

QUALITY CONTROL SECTION



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

Anions by IC, EPA Method 300.0 - Quality Control

Batch W5E0648 - EPA 300.0

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0648-BLK1)					Analyzed: 05/13/15 11:01						
Chloride, Total	ND	0.10	0.50	mg/l							
LCS (W5E0648-BS1)					Analyzed: 05/13/15 11:19						
Chloride, Total	3.83	0.10	0.50	mg/l	4.00		96	90-110			
Duplicate (W5E0648-DUP1)					Source: 5E11004-02 Analyzed: 05/13/15 12:17						
Chloride, Total	24.3	0.25	1.2	mg/l		24.1			0.7	20	
Duplicate (W5E0648-DUP2)					Source: 5E11004-03 Analyzed: 05/13/15 13:13						
Chloride, Total	21.2	0.50	2.5	mg/l		23.6			11	20	
Matrix Spike (W5E0648-MS1)					Source: 5E11004-02 Analyzed: 05/13/15 12:36						
Chloride, Total	62.0	1.0	5.0	mg/l	40.0	24.1	95	76-118			
Matrix Spike (W5E0648-MS2)					Source: 5E11005-01 Analyzed: 05/13/15 14:13						
Chloride, Total	5480	50	250	mg/l	2000	3750	86	76-118			
Matrix Spike Dup (W5E0648-MSD1)					Source: 5E11004-02 Analyzed: 05/13/15 12:54						
Chloride, Total	60.6	1.0	5.0	mg/l	40.0	24.1	91	76-118	2	20	
Matrix Spike Dup (W5E0648-MSD2)					Source: 5E11005-01 Analyzed: 05/13/15 14:32						
Chloride, Total	5480	50	250	mg/l	2000	3750	86	76-118	0.1	20	

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods - Quality Control

Batch W5E0660 - SM 10200H

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0660-BLK1)					Analyzed: 05/22/15 12:19						
Chlorophyll-A	ND	8.3	10	ug/l							
LCS (W5E0660-BS1)					Analyzed: 05/22/15 12:19						
Chlorophyll-A	45.9	8.3	10	ug/l	50.0		92	70-112			

Batch W5E0664 - EPA 353.2

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0664-BLK1)					Analyzed: 05/13/15 15:27						
Nitrate as N	ND	0.041	0.10	mg/l							
Nitrite as N	ND	0.010	0.10	mg/l							
Blank (W5E0664-BLK2)					Analyzed: 05/13/15 15:27						
Nitrate as N	ND	0.041	0.10	mg/l							
Nitrite as N	ND	0.010	0.10	mg/l							
LCS (W5E0664-BS1)					Analyzed: 05/13/15 15:29						
Nitrate as N	0.985	0.041	0.10	mg/l	1.00		98	90-110			
Nitrite as N	1.04	0.010	0.10	mg/l	1.00		104	90-110			
LCS (W5E0664-BS2)					Analyzed: 05/13/15 15:29						
Nitrate as N	0.985	0.041	0.10	mg/l	1.00		98	90-110			
Nitrite as N	0.983	0.010	0.10	mg/l	1.00		98	90-110			



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods - Quality Control

Batch W5E0664 - EPA 353.2

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Matrix Spike (W5E0664-MS1)					Source: 5E12067-07		Analyzed: 05/13/15 15:34				
Nitrate as N	2.32	0.041	0.10	mg/l	2.00	0.393	96	90-110			
Nitrite as N	1.86	0.020	0.20	mg/l	2.00	ND	93	90-110			
Matrix Spike Dup (W5E0664-MSD1)					Source: 5E12067-07		Analyzed: 05/13/15 15:36				
Nitrate as N	2.36	0.041	0.10	mg/l	2.00	0.393	99	90-110	2	20	
Nitrite as N	1.92	0.020	0.20	mg/l	2.00	ND	96	90-110	3	20	

Batch W5E0690 - EPA 365.1

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0690-BLK1)					Analyzed: 05/13/15 18:36						
o-Phosphate as P	0.000685	0.00022	0.0020	mg/l							J
LCS (W5E0690-BS1)					Analyzed: 05/13/15 18:33						
o-Phosphate as P	0.0493	0.00022	0.0020	mg/l	0.0500		99	90-110			
Matrix Spike (W5E0690-MS1)					Source: 5E13023-01		Analyzed: 05/13/15 18:41				
o-Phosphate as P	0.126	0.00022	0.0020	mg/l	0.0500	0.0763	99	90-110			
Matrix Spike Dup (W5E0690-MSD1)					Source: 5E13023-01		Analyzed: 05/13/15 18:43				
o-Phosphate as P	0.128	0.00022	0.0020	mg/l	0.0500	0.0763	103	90-110	2	20	

Batch W5E0722 - SM 2320B

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0722-BLK1)					Analyzed: 05/15/15 13:59						
Alkalinity as CaCO3	4.31	0.56	10	mg/l							J
LCS (W5E0722-BS1)					Analyzed: 05/15/15 13:59						
Alkalinity as CaCO3	254	0.56	10	mg/l	250		102	94-108			
Duplicate (W5E0722-DUP1)					Source: 5E11071-01		Analyzed: 05/15/15 13:59				
Alkalinity as CaCO3	155	0.56	10	mg/l		155			0.2	15	

Batch W5E0815 - EPA 350.1

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0815-BLK1)					Analyzed: 05/15/15 17:03						
Ammonia as N	ND	0.048	0.10	mg/l							
LCS (W5E0815-BS1)					Analyzed: 05/15/15 17:03						
Ammonia as N	0.255	0.048	0.10	mg/l	0.250		102	90-110			
Matrix Spike (W5E0815-MS1)					Source: 5E13023-02		Analyzed: 05/15/15 17:03				
Ammonia as N	27.4	2.4	5.0	mg/l	12.5	14.9	100	90-110			
Matrix Spike Dup (W5E0815-MSD1)					Source: 5E13023-02		Analyzed: 05/15/15 17:03				
Ammonia as N	27.3	2.4	5.0	mg/l	12.5	14.9	99	90-110	0.4	15	

Batch W5E0824 - SM 2540D

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0824-BLK1)					Analyzed: 05/15/15 12:01						



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

Conventional Chemistry/Physical Parameters by APHA/EPA/ASTM Methods - Quality Control

Batch W5E0824 - SM 2540D

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0824-BLK1)					Analyzed: 05/15/15 12:01						
Total Suspended Solids	ND		5	mg/l							
Duplicate (W5E0824-DUP1)					Source: 5E13082-01 Analyzed: 05/15/15 12:01						
Total Suspended Solids	11.0		5	mg/l		12.0			9	20	
Duplicate (W5E0824-DUP2)					Source: 5E13086-01 Analyzed: 05/15/15 12:01						
Total Suspended Solids	37.0		5	mg/l		37.0			NR	20	

Batch W5E0941 - EPA 351.2

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E0941-BLK1)					Analyzed: 05/19/15 14:30						
TKN	ND	0.050	0.10	mg/l							
Blank (W5E0941-BLK2)					Analyzed: 05/19/15 14:30						
TKN	ND	0.050	0.10	mg/l							
LCS (W5E0941-BS1)					Analyzed: 05/19/15 14:30						
TKN	1.02	0.050	0.10	mg/l	1.00		102	90-110			
LCS (W5E0941-BS2)					Analyzed: 05/19/15 14:30						
TKN	1.00	0.050	0.10	mg/l	1.00		100	90-110			
Duplicate (W5E0941-DUP1)					Source: 5E11004-02 Analyzed: 05/19/15 14:30						
TKN	1.85	0.050	0.10	mg/l		1.83			0.6	10	
Matrix Spike (W5E0941-MS1)					Source: 5E11005-01 Analyzed: 05/19/15 14:30						
TKN	3.13	0.050	0.10	mg/l	1.00	2.21	92	90-110			
Matrix Spike (W5E0941-MS2)					Source: 5E15107-08 Analyzed: 05/19/15 14:30						
TKN	1.34	0.050	0.10	mg/l	1.00	0.327	101	90-110			
Matrix Spike Dup (W5E0941-MSD1)					Source: 5E11005-01 Analyzed: 05/19/15 14:30						
TKN	3.19	0.050	0.10	mg/l	1.00	2.21	99	90-110	2	10	
Matrix Spike Dup (W5E0941-MSD2)					Source: 5E15107-08 Analyzed: 05/19/15 14:30						
TKN	1.36	0.050	0.10	mg/l	1.00	0.327	104	90-110	2	10	

Batch W5E1227 - EPA 365.1

Analyte	Result	MDL	MRL	Units	Spike Level	Source Result	%REC	% REC Limits	RPD	RPD Limit	Data Qualifiers
Blank (W5E1227-BLK1)					Analyzed: 05/22/15 10:37						
Phosphorus as P, Total	0.00225	0.0014	0.010	mg/l							J
LCS (W5E1227-BS1)					Analyzed: 05/22/15 10:38						
Phosphorus as P, Total	0.0515	0.0014	0.010	mg/l	0.0500		103	90-110			
Matrix Spike (W5E1227-MS1)					Source: 5E13023-01 Analyzed: 05/22/15 10:48						
Phosphorus as P, Total	0.276	0.0028	0.020	mg/l	0.0500	0.226	100	90-110			
Matrix Spike Dup (W5E1227-MSD1)					Source: 5E13023-01 Analyzed: 05/22/15 10:50						
Phosphorus as P, Total	0.280	0.0028	0.020	mg/l	0.0500	0.226	108	90-110	1	20	



AMEC Environment & Infrastructure
9177 Sky Park Court, Ste A
San Diego CA, 92123

Date Received: 05/13/15 11:10
Date Reported: 05/22/15 16:07

Notes and Definitions

M-06	Due to the high concentration of analyte inherent in the sample, sample was diluted prior to preparation. The MDL and MRL were raised due to this dilution.
J	Estimated conc. detected <MRL and >MDL.
ND	NOT DETECTED at or above the Reporting Limit. If J-value reported, then NOT DETECTED at or above the Method Detection Limit (MDL)
NR	Not Reportable
Dil	Dilution
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
% Rec	Percent Recovery
Sub	Subcontracted analysis, original report available upon request
MDL	Method Detection Limit
MDA	Minimum Detectable Activity
MRL	Method Reporting Limit

Any remaining sample(s) will be disposed of one month from the final report date unless other arrangements are made in advance.

An Absence of Total Coliform meets the drinking water standards as established by the California Department of Health Services.

The Reporting Limit (RL) is referenced as the Laboratory's Practical Quantitation Limit (PQL) or the Detection Limit for Reporting Purposes (DLR).

All samples collected by Weck Laboratories have been sampled in accordance to laboratory SOP Number MIS002.

To: 5E13023

Weck Laboratories, Inc.
14859 East Clark Avenue
City of Industry, CA 91745
Phone: (626) 336-2139
Fax: (626) 336-2634

Analysis Request and Chain of Custody

City of San Diego

Tijuana River Receiver Waters Monitoring 2012-2013
Project No.: 5025121037

From: AMEC Environment & Infrastructure
Attn: Kristina Schneider
9177 Sky Park Court
San Diego, CA 92123
Phone: (858) 278-3600 Fax: (858) 278-5300

SampleID	Date	Time	Analyses	Bottle Type	Preservative	Bottle Count
AC-TJPCU-0512N-01	5/12/15	0840	Alkalinity, Total [SM 2320B] Chloride [EPA 300.0] Nitrate-N [EPA 353.2] Nitrite-N [EPA 353.2]	2L - Polyethylene	6 °C	1
AC-TJPCU-0512N-01			Ammonia-N [EPA 350.1] Total Kjeldahl Nitrogen [EPA 351.2]	1L - Polyethylene	H2SO4	1
AC-TJPCU-0512N-01			Chlorophyll a [SM 10200H]	1L - Amber Polyethylene	6 °C	1
AC-TJPCU-0512N-01			Orthophosphate-P [EPA 365.3/365.1]	250mL - Polyethylene	6 °C, Filtered	1
AC-TJPCU-0512N-01			Total Phosphorous [EPA 365.1]	500mL - Polyethylene	H2SO4	1
AC-TJPCU-0512N-01			Total Suspended Solids [SM 2540D]	250mL - Polyethylene	6 °C	1

Sampler's Initials: JR Date/Time: 5/13/15 09:15 Received By: Hector Sanchez Date/Time: 5/13/15 09:15

Relinquished By: Brenda Stevens Date/Time: 5/13/15 11:10AM Received By: James Jma Date/Time: 5/13/15 11:00

Relinquished By: Hector Sanchez Date/Time: 5/13/15 11:00AM Received By: James Jma Date/Time: 5/13/15 11:00

Page: 2 of 3

5E13023

Analysis Request and Chain of Custody

From:
AMEC Environment & Infrastructure
Attn: Kristina Schneider
9177 Sky Park Court
San Diego, CA 92123
Phone: (858) 278-3600 Fax: (858) 278-5300

To:
Weck Laboratories, Inc.
14859 East Clark Avenue
City of Industry, CA 91745
Phone: (626) 336-2139
Fax: (626) 336-2634

City of San Diego
Tijuana River Receiver Waters Monitoring 2012-2013
Project No.: 5025121037

SampleID	Date	Time	Analyses	Bottle Type	Preservative	Bottle Count
AC-TJPCD-057215-01	5/12/15	1200	Alkalinity, Total [SM 2320B] ✓ Chloride [EPA 300.0] ✓ Nitrate-N [EPA 353.2] ✓ Nitrite-N [EPA 353.2] ✓	2L - Polyethylene	6 °C	1
AC-TJPCD-057215-01			Ammonia-N [EPA 350.1] ✓ Total Kjeldahl Nitrogen [EPA 351.2] ✓	1L - Polyethylene	H2SO4	1
AC-TJPCD-057215-01			Chlorophyll a [SM 10200H] ✓	1L - Amber Polyethylene	6 °C	1
AC-TJPCD-057215-01			Orthophosphate-P [EPA 365.3/365.1] ✓	250mL - Polyethylene	6 °C, Filtered	1
AC-TJPCD-057215-01			Total Phosphorous [EPA 365.1] ✓	500mL - Polyethylene	H2SO4	1
AC-TJPCD-057215-01			Total Suspended Solids [SM 2540D] ✓	250mL - Polyethylene	6 °C	1

Sampler's Initials: JR

Relinquished By: ~~Proskiansky~~ Date/Time: 5/13/15 09:15 Received By: Hector Sanchez Date/Time: 5/13/15 09:15

Relinquished By: Hector Sanchez Date/Time: 5/13/15 11:10 Received By: Jamaiah Date/Time: 5/13/15 11:10

Page: 1 of 3 292

5E13023

Analysis Request and Chain of Custody

From:
AMEC Environment & Infrastructure
Attn: Kristina Schneider
9177 Sky Park Court
San Diego, CA 92123
Phone: (858) 278-3600 Fax: (858) 278-5300

City of San Diego
Tijuana River Receiver Waters Monitoring 2012-2013
Project No.: 5025121037

To:
Weck Laboratories, Inc.
14859 East Clark Avenue
City of Industry, CA 91745
Phone: (626) 336-2139
Fax: (626) 336-2634

SampleID	Date	Time	Analyses	Bottle Type	Preservative	Bottle Count
AC-TJPCD-051215-02	5/12/15	1205	Alkalinity, Total [SM 2320B] Chloride [EPA 300.0] Nitrate-N [EPA 353.2] Nitrite-N [EPA 353.2]	2L - Polyethylene	6 °C	1
AC-TJPCD-051215-02			Ammonia-N [EPA 350.1] Total Kjeldahl Nitrogen [EPA 351.2]	1L - Polyethylene	H2SO4	1
AC-TJPCD-051215-02			Chlorophyll a [SM 10200H]	1L - Amber Polyethylene	6 °C	1
AC-TJPCD-051215-02			Orthophosphate-P [EPA 365.3/365.1]	250mL - Polyethylene	6 °C, Filtered	1
AC-TJPCD-051215-02			Total Phosphorous [EPA 365.1]	500mL - Polyethylene	H2SO4	1
AC-TJPCD-051215-02			Total Suspended Solids [SM 2540D]	250mL - Polyethylene	6 °C	1

Sampler's Initials: JR

Relinquished By: Kristina Schneider Date/Time: 5/13/15 09:15

Relinquished By: Hector Sanchez Date/Time: 5/13/15 11:10 AM

Date/Time: 05/13/15 0915

Date/Time: 5/13/15 1110

29