

One Alexandria Square Project

Waste Management Plan

November 2021 | 00022.00007.001

Submitted to:

City of San Diego
Development Services Department
1222 First Avenue
San Diego, CA 92101

Prepared for:

Alexandria Real Estate Equities, Inc.
10996 Torreyana Road Suite 250
San Diego, CA 92121

Prepared by:

HELIX Environmental Planning, Inc.
7578 El Cajon Boulevard
La Mesa, CA 91942

One Alexandria Square Project

Waste Management Plan

Submitted to:

City of San Diego
Development Services Department
1222 First Avenue
San Diego, CA 92101

Prepared for:

Alexandria Real Estate Equities, Inc.
10996 Torreyana Road Suite 250
San Diego, CA 92121

Prepared by:

HELIX Environmental Planning, Inc.
7578 El Cajon Boulevard
La Mesa, CA 91942

November 2021 | 00022.00007.001

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1.0 INTRODUCTION.....	1
1.1 Purpose of the Report.....	1
1.2 Project Location	1
1.3 Project Description	1
2.0 REGULATORY FRAMEWORK.....	3
2.1 State of California	3
2.2 Local Regulations	3
2.2.1 City of San Diego CEQA Significance Determination Thresholds.....	4
2.2.2 City of San Diego Refuse and Recyclable Materials Storage Ordinance.....	5
3.0 PRE-CONSTRUCTION WASTE	7
3.1 Demolition	7
3.1.1 Building Demolition	7
3.1.2 Pavement Demolition	9
3.2 Clearing and Grubbing	10
3.3 Grading.....	10
3.4 Summary of Pre-Construction Waste Generation and Diversion.....	11
3.4.1 Summary of Salvage Material	11
3.4.2 Summary of Recycled Material	11
4.0 CONSTRUCTION WASTE.....	13
4.1 Estimated Construction Waste Generation and Diversion.....	14
4.1.1 Proposed Post-Consumer Content Construction Materials	16
5.0 OCCUPANCY WASTE	16
5.1 Storage.....	16
5.2 Waste Generation – Existing Uses	17
5.3 Waste Generation – Project Uses.....	17
5.4 Change in Waste Generation	18
6.0 WASTE REDUCTION, RECYCLING, AND DIVERSION MEASURES.....	19
6.1 Construction Waste Management, Coordination, and Oversight.....	19
6.1.1 Contractor Agreements and City Coordination	19
6.1.2 Designation of a Solid Waste Management Coordinator	19
6.1.3 Contractor Waste Management Training.....	20
6.1.4 Daily Site Inspections by Contractor(s).....	20
6.1.5 Regular Removal of Waste Materials	21
6.1.6 City Verification.....	21
6.2 Construction Waste Reduction, Diversion Compliance, and Verification	21
6.2.1 Identification, Separation, and Diversion of Recyclable/Reusable Materials	21
6.2.2 Source Reduction Measures	22

TABLE OF CONTENTS (CONT.)

<u>Section</u>	<u>Page</u>
6.3 Operational Waste Management and Diversion Measures	23
7.0 CONCLUSION.....	24
7.1 Summary of Waste Generation and Diversion	24
7.2 Compliance with City and State Regulations	25
7.2.1 State of California	25
7.2.2 City of San Diego	25
8.0 LIST OF PREPARERS	26
9.0 REFERENCES	27

LIST OF APPENDICES

A	Certified Construction & Demolition Recycling Facility Directory
B	City of San Diego C&D Debris Conversion Rate Table
C	City of San Diego Waste Generation Factors – Occupancy Phase

LIST OF FIGURES

<u>No.</u>	<u>Title</u>	<u>Follows Page</u>
1	Regional Location.....	2
2	Project Vicinity	2
3	Site Plan	2

LIST OF TABLES

<u>No.</u>	<u>Title</u>	<u>Page</u>
1	Required Minimum Storage Areas for Non-Residential Development	5
2	City C&D Deposit Schedule	7
3	Existing Structure Demolition Waste Content.....	9
4	Pre-Construction Demolition, Clearing/Grubbing, and Grading Solid Waste Generation, Diversion Rates, and Facilities	12
5	Construction Solid Waste Generation, Diversion Rates, and Facilities.....	14
6	Estimated Annual Solid Waste Generation and Diversion Rates – Existing Buildings	17
7	Estimated Annual Solid Waste Generation and Diversion Rates – Proposed Buildings	18

ACRONYMS AND ABBREVIATIONS

AB	Assembly Bill
C&D	Construction and Demolition
CalRecycle	California Department of Resources Recycling and Recovery
CEQA	California Environmental Quality Act
CY	cubic yard(s)
DSD	Development Services Department (City of San Diego)
ESD	Environmental Services Department (City of San Diego)
FEMA	Federal Emergency Management Agency
IBC	International Building Code
ICC	International Code Council
IWMP	Integrated Waste Management Plan
lbs	pounds
R&D	research and development
SB	Senate Bill
SDMC	San Diego Municipal Code
SF	square foot/feet
SRRE	Source Reduction and Recycling Element
SWMC	Solid Waste Management Coordinator
WDM	Waste Diversion Measures
WMP	Waste Management Plan

This page intentionally left blank

1.0 INTRODUCTION

1.1 PURPOSE OF THE REPORT

The purpose of this Waste Management Plan (WMP) is to identify the quantity of solid waste that would be generated by the One Alexandria Square Project (project) throughout demolition, construction, and operation, and to identify measures to reduce the potential impacts associated with management of such waste.

Proper separation and diversion of recyclable waste materials is required in order to divert each material type to a recycling/reuse facility with the highest possible diversion rate. As discussed further in Section 2.0, Regulatory Framework, in order to comply with City of San Diego's (City's) waste reduction ordinances and the waste diversion goals established in State Assembly Bill (AB) 341, the project must achieve a 75 percent diversion rate during demolition and construction. The City's California Environmental Quality Act (CEQA) Significance Determination Thresholds for solid waste identify a threshold of 1,500 tons of waste or more during construction and demolition (C&D) for direct solid waste impacts, and 60 tons of waste or more during C&D for potentially significant cumulative solid waste impacts. The City Environmental Services Department's (ESD) Certified C&D Recycling Facility Directory (City 2021; Appendix A) provides guidance on identifying recycling/reuse facility locations, accepted materials, recycling/reuse rates, and associated disposal fees and/or the value of the materials accepted for recycling/reuse.

This WMP has been prepared consistent with applicable federal, State, and local laws, regulations, and standards pertinent to the project. Its goal is to implement an approach for managing waste that conserves landfill space, preserves environmental quality, conserves natural resources, and reduces disposal costs. Responsibility for ensuring ongoing WMP compliance would be under the direction of the Project Solid Waste Management Coordinator (SWMC), as assigned by Alexandria Real Estate Equities, Inc. (Applicant).

1.2 PROJECT LOCATION

The project site is an approximately 22-acre property located at 10933 North Torrey Pines Road in the City of San Diego (Figures 1 and 2, *Regional Location*, and *Project Vicinity*, respectively). The project site is currently developed with four buildings and multiple parking lots. The building uses include research and development (R&D), office space, and other supporting uses. The site is bounded by Callan Road, North Torrey Pines Road, Torreyana Road, and Science Park Road, excluding the southeast quadrant of the block, which contains the Sanford Burnham Prebys Medical Discovery Institute. Surrounding uses include a restaurant and industrial uses to the north, hotels, restaurants, a spa, and a golf course to the west, and medical laboratories and research centers to the east and south.

1.3 PROJECT DESCRIPTION

The project entails the reconfiguration and expansion of the existing site to add research and development (R&D) office/lab space (including underground parking), a parking structure, and an amenity village that would include accessory supporting uses such as food and beverage and retail. The project proposes to retain two of the existing four buildings and some parking areas, while redeveloping the remainder of the site (Figure 3, *Site Plan*). Specifically, the two buildings at the western portion of

the site, located at 10931/10933 North Torrey Pines Road and 10975 North Torrey Pines Road, would be demolished. The two remaining buildings located on the eastern portion of the site would be retained and are labeled as buildings B1 and B2 by the project. The project proposes to construct eight additional buildings and one parking garage. Three of the proposed buildings (buildings B3, B4, and B5) would also include subterranean parking. The square footages of the two buildings that will be retained, the eight proposed buildings, the proposed parking garage, and the total combined subterranean parking space for the three new buildings are listed below:

- B1: 67,266 square feet (SF)
- B2: 75,720 SF
- B3: 85,865 SF
- B4: 78,346 SF
- B5: 68,456 SF
- B6: 39,296 SF
- B7: 3,017 SF
- B8: 2,473 SF
- B9: 2,735 SF
- B10: 4,986 SF
- Parking Garage: 261,547 SF
- New Subterranean Parking: 110,518 SF

In total, the project would retain 142,986 SF in existing building space and would construct 657,239 SF, consisting of 285,174 SF of new building space, a 261,547 SF parking garage, and 110,518 SF of new subterranean parking space. Buildings B1 and B2 would continue to support existing uses, including R&D uses in both buildings in addition to retail and restaurant space in B1. Buildings B3, B4, B5, and B6 would be constructed to support R&D uses. Buildings B7, B8, B9, and B10 would serve as the Amenity Village, consisting of retail and restaurant uses.


The project proposes to retain 371 existing parking spaces, occurring at building B1, at building B2, and in Lot A. The breakdown of existing parking spaces that would be retained is listed below:

- B1: 49 subterranean spaces, 138 surface spaces
- B2: 68 subterranean spaces, 15 surface spaces
- Lot A: 101 surface spaces

The project proposes to construct 934 parking spaces. The proposed parking would occur in a parking garage and at buildings B3, B4, and B5. The breakdown of the proposed parking spaces is listed below:


- B3: 54 subterranean spaces
- B4: 60 subterranean spaces
- B5: 21 subterranean spaces
- Parking Garage: 799 spaces

Therefore, a total of 1,305 parking spaces would be present during project operation.

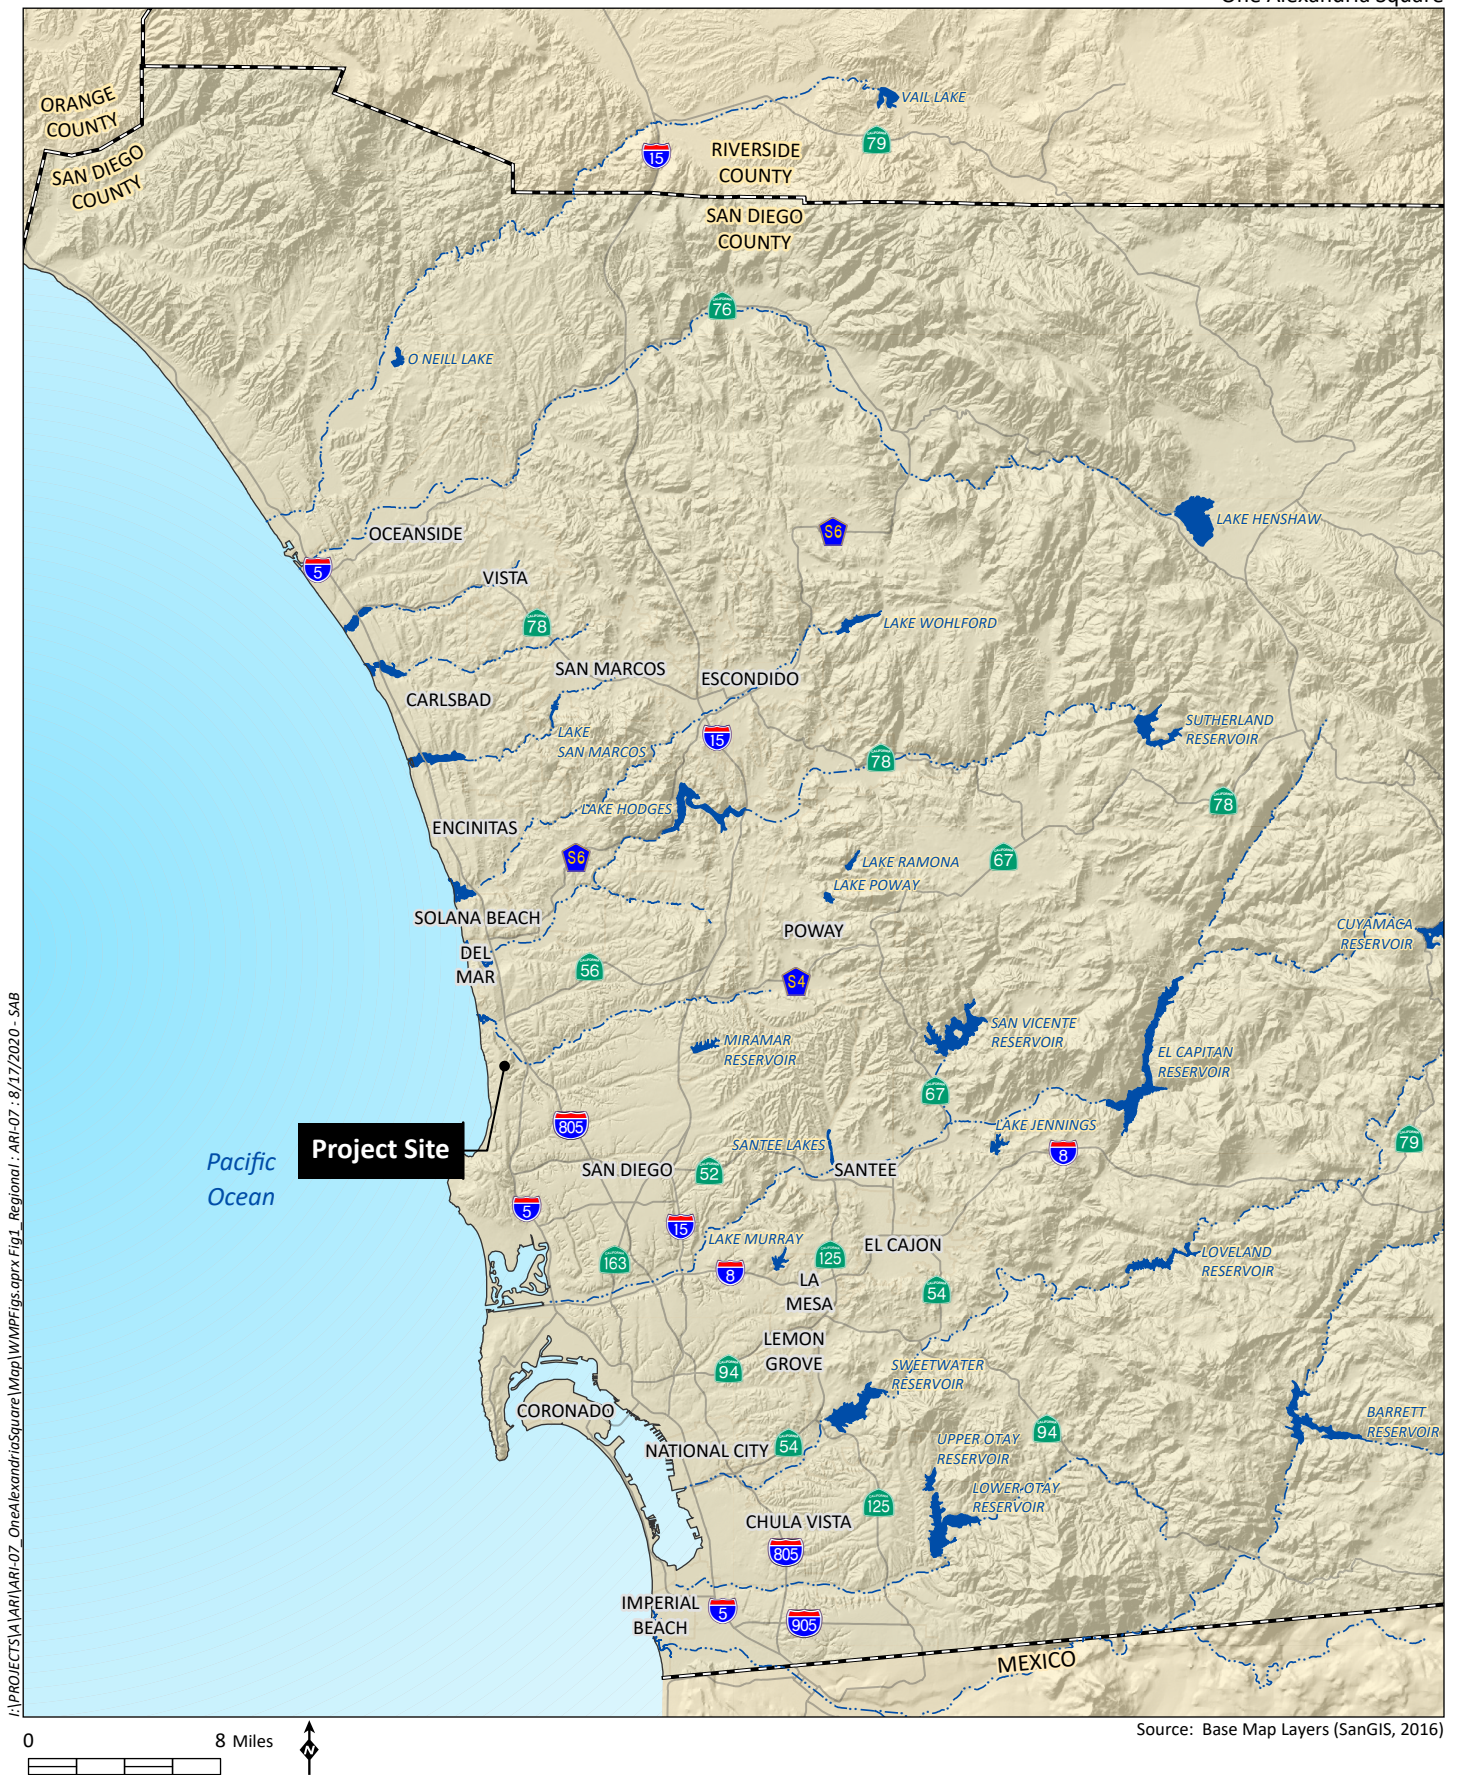



I:\PROJECTS\Alexandria Real Estate_00022\ARI-07_One Alexandria Square\Map\WMP\Fig3_SitePlan.indd 00022.7.1 - 11/23/2021 - SAB

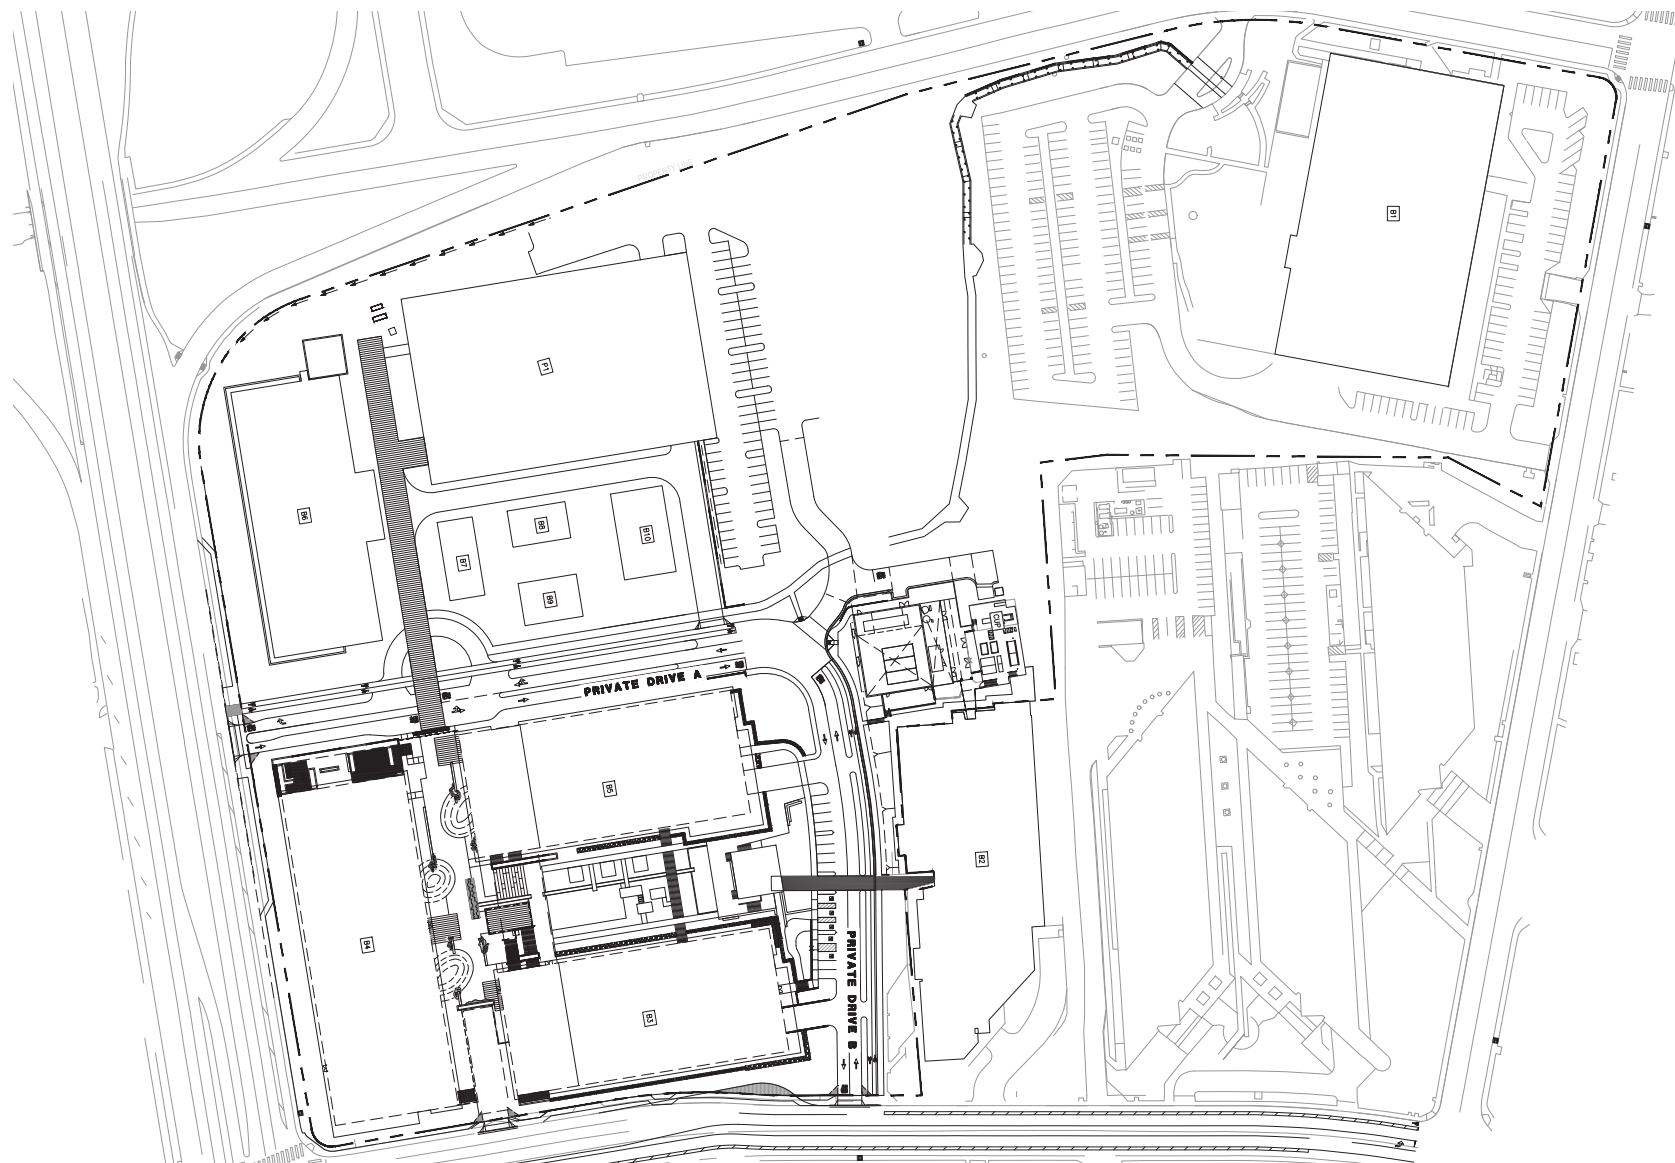

Source: Rick Engineering (2021)

2.0 REGULATORY FRAMEWORK

2.1 STATE OF CALIFORNIA

The State of California (State) Integrated Waste Management Act of 1989 (California Assembly Bill [AB] 939), which is administered by the California Department of Resources Recycling and Recovery (CalRecycle), requires counties to develop an Integrated Waste Management Plan (IWMP) that describes local waste diversion and disposal conditions, and lays out realistic programs to achieve the waste diversion goals. IWMPs compile Source Reduction and Recycling Elements (SRREs) that are required to be prepared by each local government, including cities. SRREs analyze the local waste stream to determine where to focus diversion efforts, and provide a framework to meet waste reduction mandates. The goal of the solid waste management efforts is not to increase recycling, but to decrease the amount of waste entering landfills. AB 939 required all cities and counties to divert a minimum 50 percent of all solid waste from landfill disposal.

In 2011, the State legislature enacted AB 341 (California Public Resource Code Section 42649.2), increasing the diversion target to 75 percent statewide. AB 341 also requires the provision of recycling service to commercial and residential facilities that generate 4 cubic yards (CY) or more of solid waste per week.

In October 2014, Governor Brown signed AB 1826 Chesbro (Chapter 727, Statutes of 2014), requiring businesses to recycle their organic waste on and after April 1, 2016, depending on the amount of waste they generate per week. Organic waste means food waste, green waste, landscape and pruning waste, nonhazardous wood waste, and food-soiled paper waste that is mixed in with food waste. For businesses that generate 8 or more CY of organic waste per week, this requirement began April 1, 2016, while those that generate 4 CY of organic waste per week must have an organic waste recycling program in place beginning January 1, 2017. This law also requires that on and after January 1, 2016, local jurisdictions across the State implement an organic waste recycling program to divert organic waste generated by businesses, including multi-family residential dwellings that consist of five or more units. This law phases in the mandatory recycling of commercial organics over time, while also offering an exemption process for rural counties.

In September 2016, Senate Bill (SB) 1383 (Chapter 395, Statutes of 2016) was approved, requiring a statewide reduction of organic waste disposal. Specifically, SB 1383 requires a 50 percent reduction of the statewide disposal of organic waste from the 2014 level by 2020, and a 75 percent reduction of the 2014 level by 2025. SB 1383 requires cities and counties to adopt regulations to achieve the specified targets for reducing organic waste in landfills.

2.2 LOCAL REGULATIONS

The City has enacted codes and policies directed at the achievement of State-required diversion levels, including the Refuse and Recyclable Materials Storage Regulations (San Diego Municipal Code [SDMC] Chapter 14, Article 2 Division 8), Recycling Ordinance (City 2007; SDMC Chapter 6, Article 6, Division 7), and the Construction and Demolition Debris Deposit Ordinance (City 2008; SDMC Chapter 6, Article 6, Division 6). The City's Zero Waste Plan, a component of the City's Climate Action Plan, was approved and adopted by City Council on July 13, 2015. The Zero Waste Plan identifies goals and strategies to achieve 75 percent diversion by 2020, 90 percent diversion by 2035, and "zero" waste by 2040 (City 2015).

Additionally, the City is in the process of implementing extensive procedural changes to comply with SB 1383, including developing collection operations, adopting purchasing policies, amending the City's Municipal Recycling Code, enacting building requirements, preparing enforcement responsibilities, and strategizing public education and outreach efforts. As part of this effort, starting in 2022, the City and City-certified private waste haulers will expand organic waste collection services for residents and businesses to meet the organic waste reduction goals set by SB 1383.

As stated in the City Development Services Department (DSD) CEQA Significance Determination Thresholds (City 2016a), implementation of these regulations and ordinances alone is not projected to achieve a 50 percent diversion rate, far below the current 75 percent diversion level targeted by the State and identified in the Zero Waste Plan for 2020. The City's ESD estimates that compliance with existing City ordinances and regulations alone achieves only an approximate 30 and 40 percent diversion rate for small and large projects, respectively (City 2013). Therefore, discretionary projects must undertake additional measures to comply with existing regulations.

2.2.1 City of San Diego CEQA Significance Determination Thresholds

The City's CEQA Significance Determination Thresholds establish solid waste generation thresholds for discretionary projects. Proposed projects that involve construction, demolition, and/or renovation that meet or exceed the thresholds described below are considered to have potentially significant solid waste impacts and require the preparation of a WMP.

Direct Impacts

A project would have a direct impact on solid waste services if it would generate 1,500 tons of waste or more during demolition and construction. Projects that include the construction, demolition, or renovation of 1,000,000 SF or more of building space are considered by the City to have the potential to generate this amount of waste, and therefore may have direct impacts on solid waste services. Additional considerations are as follows:

- The generation of large amounts of waste result in direct impacts that bring facilities closer to daily throughput limits, shorten facility lifespans, require increased numbers of trucks and other equipment, and make it difficult for the City to achieve required waste reduction levels. Waste management planning is based on a steady rate of waste generation and does not assume increased waste generation due to growth.
- While all projects are required to comply with the City's waste management ordinances, direct and cumulative impacts are mitigated by the implementation of project-specific WMPs, which may reduce solid waste impacts to below a level of significance.
- For projects over 1,000,000 SF, a significant direct and cumulative solid waste impact would result if the compliance with the City's ordinances and the WMP fail to reduce the impacts of such projects to below a level of significance and/or if a WMP for the project is not prepared and conceptually approved by the ESD prior to distribution of the draft environmental document for public review.

Cumulative Impacts

A project would have a cumulative impact on solid waste services if it would generate 60 tons of waste or more per year. Projects that include the construction, demolition, and/or renovation of 40,000 SF or more of building space are considered by the City to potentially generate this amount of waste and, therefore, may have cumulative impacts on solid waste services. Other projects such as new single-family residences on public streets or projects creating a demand for litter bin service may also cumulatively impact solid waste services.

While all projects are required to comply with the City's waste management ordinances, cumulative impacts are mitigated by the implementation of a project-specific WMP that reduces solid waste impacts to below a level of significance.

Project Potential Impacts

The project may generate more than 1,500 tons of solid waste materials during demolition and construction and therefore may exceed the City's threshold for direct solid waste impacts. The project also proposes construction of more than 40,000 SF, thereby exceeding the City's threshold for cumulative solid waste impacts without implementation of solid waste diversion measures.

Because implementation of the project without waste diversion measures may exceed direct and cumulative solid waste thresholds, the City has required preparation of this WMP in compliance with CEQA and City Guidelines, to ensure that the project contribution to the overall waste produced within the City would be reduced sufficiently to allow the City to comply with the waste reduction targets established in the Public Resources Code and State statutes.

2.2.2 City of San Diego Refuse and Recyclable Materials Storage Ordinance

San Diego Municipal Code (SDMC) Section 142.0801 et seq. contains the language of the City Refuse and Recyclable Materials Storage Ordinance (Storage Ordinance), an ordinance that is required by State law. Table 1, *Required Minimum Storage Areas for Non-residential Development*, (SDMC Table 142 08C) provides information on minimum exterior refuse and recyclable material storage areas for non-residential development.

Table 1
REQUIRED MINIMUM STORAGE AREAS FOR NON-RESIDENTIAL DEVELOPMENT

Gross Floor Area (SF)	Minimum Refuse Storage Area (SF)	Minimum Recyclable Material Storage Area (SF)	Total Minimum Storage Area (SF)
0-5,000	12	12	24
5,001-10,000	24	24	48
10,001-25,000	48	48	96
25,001-50,000	96	96	192
50,001-75,000	144	144	288
75,001-100,000	192	192	384
100,001+	192+48 SF for every 25,000 SF of building area above 100,001	192+48 SF for every 25,000 SF of building area above 100,001	384+96 SF for every 25,000 SF of building area above 100,001

SF = square feet

City of San Diego Recycling Ordinance

The City's Recycling Ordinance, found in SDMC Section 66.0701 et seq., was adopted in November 2007 (City 2007). The Recycling Ordinance requires the provision of recycling service for all commercial facilities, all single-family residences, and multi-family residences with more than 49 units. The Ordinance also provides an exemption for land uses that generate less than 6 CY of waste per week. However, as noted above, AB 341, which was chaptered after the City enacted this ordinance, has imposed a requirement that "captures" any uses being served with 4 CY or more of refuse capacity. This State requirement makes the provision of recycling service a virtually universal requirement. In addition, the Recycling Ordinance also requires development of educational materials to ensure occupants are informed about the City's ordinance and recycling services, including information on types of recyclable materials accepted.

City of San Diego Construction and Demolition Debris Deposit Ordinance

On July 1, 2008, the City's C&D Debris Deposit Ordinance became effective (City 2008). An amendment to the ordinance and revisions to the associated C&D deposit schedule were approved by the City Council on December 10, 2013 (effective January 1, 2014) and on April 19, 2016 (effective June 22, 2016). The C&D Debris Deposit Ordinance is designed to keep C&D materials out of local landfills and ensure that materials are diverted from disposal. The ordinance creates an economic incentive to recycle C&D debris through the collection of fully refundable deposits that are returned, in whole or in part, upon proof of the amount of C&D debris the project applicant diverted from landfill disposal. The ordinance requires that the majority of construction, demolition, and remodeling projects requiring building, combination, and demolition permits pay a refundable C&D Debris Recycling Deposit and divert at least 65 percent of their debris by recycling, reusing, or donating usable materials. The deposit is held until the applicant provides receipts demonstrating that a minimum 65 percent of the material generated has been diverted from disposal in landfills.

The C&D Ordinance stipulates that projects will be required to divert 75 percent of their wastes when mixed debris facilities with a permitted daily tonnage capacity of at least 1,000 tons maintain a 75 percent diversion rate for three consecutive calendar year quarters. Greater than 75 percent diversion also may be required for a project if a higher goal is specified during discretionary permitting. Mixed debris recyclers in San Diego County currently achieve between 74 and 82 percent diversion rates at their facilities (City 2021; Appendix A). This is because not everything that comes through the door is usable or marketable. While most of the facilities achieve a diversion rate equal to or greater than 75 percent, one facility has a diversion rate of 74 percent. For a project that would dispose of mixed debris at the facility that achieves a 74 percent diversion rate, virtually all clean C&D waste from a project must be source separated and sent to a material-specific recycling facility, such as aggregate and metal recyclers, in order to achieve an overall diversion rate of 75 percent. Higher diversion rates can also be accomplished by salvage and/or on-site reuse of C&D materials. The City's C&D thresholds and deposit amounts are shown below in Table 2, *City C&D Deposit Schedule*.

Table 2
CITY C&D DEPOSIT SCHEDULE

Building Category	Deposit per SF¹	Minimum SF Subject to Ordinance	Maximum SF Subject to Ordinance	Range of Deposits
Residential New Construction, Non-residential Alterations, Demolition	\$0.40	1,000	100,000	\$400-\$40,000
Non-residential New Construction	\$0.20	1,000	50,000	\$200-\$10,000
Flat Rate				
Residential Alterations	\$1,000	1,000	6,999	\$1,000

Source: City 2016b

¹ Deposit amounts are applied to the entire area(s) where work will be performed and are calculated based on square footage.

SF = square feet

3.0 PRE-CONSTRUCTION WASTE

Prior to initiation of the project's construction activities, site preparation would require clearing/grubbing and demolition. Clearing and grubbing would require removal of existing vegetation. Two of the site's existing structures, specifically the buildings in the northeast corner and southeast corner, would remain. Three existing parking lots would be preserved as well, located at building B1, at building B2, and in Lot A. All of the other existing structures within the project area would be demolished, including the remaining building, paved parking lot areas, and sidewalks, curbs, and gutters.

All C&D-generated waste would be subject to compliance with the source separation and diversion requirements contained in this WMP to divert, recycle, and/or re-use these materials to the maximum degree possible. As identified in the City's Certified C&D Recycling Facility Directory (City 2021; Appendix A), "Mixed C&D Debris" recyclers attain at most an 82 percent diversion rate, whereas "source separated" material recyclers can attain nearly 100 percent diversion rates (City 2021). As a result, in order to achieve the highest level of waste diversion from landfills, and highest dollar value for the quality of materials, the project would source separate (segregate) clean recyclable materials on the site by material type, to the maximum extent practicable, and divert them for recycling or reuse at City-certified facilities specializing in each material type.

3.1 DEMOLITION

3.1.1 Building Demolition

The project site currently consists of multiple parking lots and four buildings used for research and development, office space, and other supporting uses. Two of the buildings would be retained, but the two buildings located in the western portion of the project site, totaling approximately 147,458 SF, would be demolished.

3.1.1.1 Salvage

No salvage of materials in the existing buildings is proposed.

3.1.1.2 Recycling

The overall estimated quantity of debris from the buildings is based on the “General Building Formula” contained in the Federal Emergency Management Agency’s (FEMA) Debris Estimating Field Guide (2010). The formula multiplies building length, width, and height (in feet) by a constant of 0.33 to account for air space in the building, and divides the resulting number by 27 to convert cubic feet to cubic yards (CY; FEMA 2010):

$$\frac{\text{Length} \times \text{Width} \times \text{Height} \times 0.33}{27} = \text{CY}$$

The existing buildings are assumed to have an average height of approximately 24 feet. The square footage listed above equals their length times width. Using these dimensions, structural debris for the existing buildings is estimated as follows:

$$\frac{(147,458 \text{ SF} \times 24 \text{ feet} \times 0.33)}{27} = \mathbf{43,254 \text{ CY}}$$

Using this formula, it is determined that demolition of the buildings would result in approximately 43,254 CY of demolition debris. While the buildings appear to be concrete structures, specific materials contained in the existing building are not known. Therefore, estimates were pulled from the Military Base Closure Handbook – A Guide to Construction and Demolition Materials Recovery (CalRecycle 2002). According to this handbook, demolition of typical commercial concrete structures results in a C&D waste stream (by volume) as follows:¹

- 51 percent concrete
- 22 percent brick
- 18 percent wood
- 5 percent paperboard
- 3 percent metal

In addition to the percentages listed above, it is assumed that there are other recyclable “mixed debris” materials present in unknown quantities, which are estimated to comprise 20 percent of the total demolition debris. These materials would be too damaged or mixed to be source separated into clean materials and would be disposed of accordingly. An additional eight percent non-recyclable “waste” also was factored into the total waste stream anticipated for demolition of the structures. Factoring in the 28 percent mixed debris and trash that would be generated during demolition, the concrete, brick, wood, paperboard, and metal breakdown provided in the Military Base Closure Handbook would account for the remaining 72 percent of total waste.

¹ The *Military Base Closure Handbook – A Guide to Construction and Demolition Materials Recovery* has the percentage total of waste equaling 99 percent. This is likely due to rounding that was not disclosed in the document. To allow for balanced equations, a 0.2 percent was added to concrete, brick, wood, paperboard, and metal materials in the calculations.

The complete breakdown of waste types and volumes of demolition waste anticipated to be generated are shown in Table 3, *Existing Structure Demolition Waste Content*.

Table 3
EXISTING STRUCTURE DEMOLITION WASTE CONTENT

Material	Percent Waste by Material (%)¹	Volume Waste by Material (CY)²
Concrete	37	15,945
Brick	16	6,914
Wood – Clean ³	7	2,834
Wood – Treated ³	7	2,834
Paperboard	4	1,619
Metal	2	997
Mixed debris	20	8,651
Trash	8	3,460
BUILDING TOTAL		43,254

Sources: FEMA 2010; CalRecycle 2002

¹ Estimated percentages for concrete, brick, wood, paperboard, and metal provided by the Military Base Closure Handbook – A Guide to Construction and Demolition Materials Recovery (CalRecycle 2002) were broken down from the 72 percent of demolition materials remaining after subtracting 20 percent mixed debris and 8 percent trash. For example, the percent waste by material for concrete was generated by multiplying 72 percent by 51 percent (the concrete composition in commercial concrete structures) to yield 37 percent of the total waste generated during demolition.

² Table information subject to field verification during demolition.

³ For estimation purposes, wood waste materials are split 50 percent clean, and 50 percent treated to conservatively account for inability to recycle treated wood.

Note that numbers may not total due to rounding.

CY = cubic yard

It is assumed that treated wood, in addition to approximately eight percent of demolition waste, would not be recyclable. These materials would be disposed of at the Miramar Landfill at a zero percent diversion rate. The additional 20 percent of “mixed debris” demolition materials would be disposed of at a City-approved mixed debris materials recycling facility at a minimum 74 percent diversion rate (City 2020; Appendix A).

3.1.2 Pavement Demolition

Pavement demolition is expected to include multiple asphalt parking lots and internal roadways throughout the site. The paved parking surfaces at building B1, building B2, and in Lot A would remain. The Applicant has indicated that a total of approximately 200,680 SF of asphalt material would be removed. Demolition estimates for these materials have been calculated based on the following assumptions:

- Demolition estimate for asphalt (paved parking areas) assumes 3 inches thick and 142 pounds (lbs) per cubic foot. This would equate to approximately 7,124,140 lbs, or 3,562 tons, based on the 200,680 SF of existing on-site asphalt that will be demolished.

Salvage

Asphalt may have the potential to be salvaged and reused on-site. As a conservative estimate, it is assumed that all pavement material will be removed from the site.

Recycling

Quantities of parking, sidewalk, and sidewalk/curb demolition materials are estimated to total approximately 3,562 tons. The diversion rate for asphalt is 100 percent (City 2021; Appendix A). Therefore, the quantity diverted and recycled is estimated to total 3,562 tons.

3.2 CLEARING AND GRUBBING

Clearing and grubbing involves the removal of existing vegetation. The project is anticipated to require removal of approximately 1,686 CY of removed vegetation and other cleared materials during the clearing and grubbing process. Based on the City's C&D Debris Conversion Rate Table, which identifies a weight of 0.15 ton/CY of vegetation (City 2016c; Appendix B), the net export of removed vegetation and other cleared materials during the clearing and grubbing process is anticipated to be approximately 253 tons. Other waste materials associated with the clearing and grubbing are anticipated to include relatively negligible amounts of waste generated by contractors working on the site during the clearing and grubbing process.

Salvage

Although there is potential for some existing landscaping to be retained and reused on site, most of the existing vegetation within the project is assumed to be removed.

Recycling

Vegetation would be processed and recycled at a target rate of 100 percent diversion at Miramar Greenery, a City-certified green waste recycling facility. The City's Certified C&D Recycling Facility Directory (City 2021; Appendix A) states the diversion rate for clean source-separated materials shall be 100 percent. Other waste materials associated with the clearing and grubbing are anticipated to include negligible amounts of waste generated by contractors working on the site during the clearing and grubbing process.

3.3 GRADING

According to information provided by the Applicant, grading is anticipated to require 183,150 CY, or 238,095 tons, of cut and 5,200 CY, or 6,760 tons, of fill. Therefore, a net 177,950 CY, or 231,335 tons, would be exported off site. Estimates were based on the City's C&D Debris Conversion Rate Table, which identifies an excavated soil weight of 1.30 tons/CY (City 2016c; Appendix B).

Excavated soil is anticipated to be diverted at a rate of 100 percent to one of the facilities from the City's Certified C&D Recycling Facility Directory (City 2021; Appendix A). Certified facilities include the following:

- Hanson Aggregates West, Miramar, 9229 Harris Plant Road, San Diego, CA 92126
- Vulcan Carol Canyon Landfill and Recycle Site, 10051 Black Mountain Road, San Diego, CA 92126
- Moody's, 3210 Oceanside Boulevard, Oceanside, CA 92056
- Robertson's Ready Mix, 2094 Willow Glen Drive, El Cajon, CA 92019
- Terra Bella Nursery, 302 Hollister Street, San Diego, CA 92154

Other waste materials associated with grading are anticipated to include negligible amounts of waste generated by contractors working on site during the grading process.

3.4 SUMMARY OF PRE-CONSTRUCTION WASTE GENERATION AND DIVERSION

As discussed above, the waste materials to be generated during demolition, clearing and grubbing, and grading for project implementation would be source-separated for recycling or reuse at City-certified facilities specializing in each material type, as applicable. A summary of anticipated waste generation volumes and diversion rates for pre-construction activities is provided in Table 4, *Pre-Construction Demolition, Clearing/Grubbing, and Grading Solid Waste Generation, Diversion Rates, and Facilities*. As shown in the table, during pre-construction the project would generate 271,609 tons and divert 267,884 tons.

3.4.1 Summary of Salvage Material

Demolition of the buildings, parking lots, and curb/gutter/sidewalk would generate salvageable materials. However, as no specific inventory of reusable items has been conducted at this preliminary stage and no salvage plan has been prepared, no salvage is proposed.

3.4.2 Summary of Recycled Material

Materials generated during pre-construction demolition, clearing and grubbing, and grading that are designated for recycling would be source separated on site during these activities. The City's Certified C&D Recycling Facility Directory, updated quarterly, states the diversion rate for these materials shall be 100 percent, except mixed C&D debris which achieves a maximum 82 percent diversion rate at the EDCO CDI Recycling and Buy Back Center and the C&D/Inert Debris Processing Facility (City 2021).

Table 4
PRE-CONSTRUCTION DEMOLITION, CLEARING/GRUBBING, AND GRADING SOLID WASTE GENERATION, DIVERSION RATES, AND FACILITIES

Source of Material	Material	Volume (CY)	Tons/Unit Conversion Factor	Tons	Diversion Rate (Percent)	Facility/Destination of Materials	Tons Diverted	Tons Disposed
Building Demolition	Concrete	15,945	1.2	19,134	100%	A	19,134	0
	Brick	6,914	0.7	4,840	100%	A	4,840	0
	Clean Wood	2,834	0.15	425	100%	B	425	0
	Treated Wood	2,834	0.15	425	0%	C	0	425
	Paperboard	1,619	0.05	81	100%	A	81	0
	Metal	997	0.51	508	100%	A	508	0
	Mixed Debris	8,651	1.19	10,295	74%	A	7,618	2,677
	Trash	3,460	0.18	623	0%	C	0	623
Parking/Sidewalks/ Gutter Demolition	Asphalt/ Concrete	--	--	3,562	100%	A	3,562	0
Grading/Clearing/ Grubbing	Landscape Debris	1,686	0.15	253	100%	B	253	0
Grading	Wet Earth	177,950	1.3	231,335	100%	A	231,335	0
TOTAL				271,609	99%	--	267,884	3,725

Sources: City's Certified C&D Recycling Facility Directory (City 2021; Appendix A), City's C&D Debris Conversion Rate Table (City 2016c; Appendix B)

Facility/Destination Key:

A. Appropriate facility on City's Certified C&D Recycling Facility Directory

B. Miramar Greenery, 5180 Convoy Street, San Diego, CA 92111

C. Miramar Landfill, 5180 Convoy Street, San Diego, CA 92111

Notes:

- Table information subject to field verification during pre-construction.
- The Applicant would contract with source separating recycling facilities listed in the City's Certified C&D Recycling Facility Directory (City 2021) with an equal or greater diversion rate to ensure diversion rates meet those estimated in this table.
- Total diversion rate based on the percentage of total tons of waste diverted over the total tons of waste generated.

CF = cubic feet; CY = cubic yards

4.0 CONSTRUCTION WASTE

In order to estimate the quantity of waste generated during construction, City ESD staff recommends assuming each material type (carpet, ceiling tiles, etc.) would approximately equal the square footage of each structure. This square footage can then be multiplied by the weight of the material, and divided by 10 to account for 10 percent waste generated during the construction process. A 10 percent construction waste generation rate is a very conservative figure based on the following reasoning:

- The cost of purchasing construction materials in excess of the quantity required is prohibitive.
- Many materials, such as metal studs, come prefabricated in specific sizes, such that the contractor can accurately predict and purchase the specific quantity that would be required.
- Contractors can return unused and unneeded items (such as metal studs, appliances, fixtures, etc.) and/or utilize materials (such as brick or drywall) on other projects.
- Not all materials would be utilized throughout project square footage, so generation rates based on the total square footage are bound to be overestimated.

In the International Building Code (IBC), the International Code Council (ICC) classifies buildings into five categories based on their type of construction (ICC 2015). Construction Type I buildings are considered to be fire resistive, often by using non-combustible materials such as steel with a fire-resistant coating and concrete. Construction Type II buildings typically have non-combustible walls but are not considered to be fire resistive. Construction Type III buildings are combustible, typically built with block or brick walls and a wooden roof. Buildings that utilize heavy timber in their framework are classified as Construction Type IV. Construction Type V buildings have wooden frames are considered to be combustible. The classifications of the project's proposed buildings are Type II for buildings B3, B4, B5, B6, and the parking garage, and Type V for buildings B7, B8, B9, and B10.

There is also construction for "common areas," which would include internal roadway paving, vehicular parking paving, and pedestrian concrete paving for the plaza. The total area for the common areas would be 345,320 SF.

As indicated, the project proposes Type II construction for the proposed buildings B3, B4, B5, B6, and the parking garage, and Type V for buildings B7, B8, B9, and B10. Based on the proposed structures, the following building materials that may generate waste are likely to be used during construction:

- | | |
|-------------------------|---------------------|
| • Wood/Heavy timber | • Asphalt |
| • Drywall | • Ceramic tile |
| • Carpet/Carpet padding | • Ceiling tile |
| • Metals | • Brick/Masonry |
| • Concrete | • Roofing materials |

Other waste generated would consist of packaging materials from construction material, appliances, windows, etc., including the following:

- Corrugated cardboard (packaging)

- Industrial plastics (plastic wrap, fasteners, etc.)
- Styrofoam (appliance packaging, not peanuts)

4.1 ESTIMATED CONSTRUCTION WASTE GENERATION AND DIVERSION

The City uses a rule of thumb of 3 lbs/SF of waste materials generated during construction (3 lbs = 0.0015 tons). Material quantities are based on City guidance as follows:

- Total project SF x each material type = Total quantity of construction materials required
- Total construction material required x 10 percent = Anticipated quantity of construction waste generated

Anticipated project construction waste generation is shown in Table 5, *Construction Solid Waste Generation, Diversion Rates, and Facilities*.

Table 5
CONSTRUCTION SOLID WASTE GENERATION, DIVERSION RATES, AND FACILITIES

Source of Material	New Gross SF	Material	Diversion Rate (Percent) ¹	Tons Diverted ²	Tons Disposed
Building B3	85,865	Metals	100%	12.9	0.0
		Concrete/Asphalt	100%	12.9	0.0
		Wood	100%	12.9	0.0
		Brick/Masonry	100%	12.9	0.0
		Drywall	100%	12.9	0.0
		Carpet/Carpet Padding	100%	12.9	0.0
		Mixed Debris	74%	9.5	3.3
		Trash	0%	0.0	12.9
BUILDING B3 TOTAL			84%	86.8	16.2
Building B4	78,346	Metals	100%	11.8	0.0
		Concrete/Asphalt	100%	11.8	0.0
		Wood	100%	11.8	0.0
		Brick/Masonry	100%	11.8	0.0
		Drywall	100%	11.8	0.0
		Carpet/Carpet Padding	100%	11.8	0.0
		Mixed Debris	74%	8.7	3.1
		Trash	0%	0.0	11.8
BUILDING B4 TOTAL			84%	79.2	14.8

Source of Material	New Gross SF	Material	Diversion Rate (Percent) ¹	Tons Diverted ²	Tons Disposed
Building B5	68,456	Metals	100%	10.3	0.0
		Concrete/Asphalt	100%	10.3	0.0
		Wood	100%	10.3	0.0
		Brick/Masonry	100%	10.3	0.0
		Drywall	100%	10.3	0.0
		Carpet/Carpet Padding	100%	10.3	0.0
		Mixed Debris	74%	7.6	2.7
		Trash	0%	0.0	10.3
BUILDING B5 TOTAL			84%	69.2	12.9
Building B6	39,296	Metals	100%	5.9	0.0
		Concrete/Asphalt	100%	5.9	0.0
		Wood	100%	5.9	0.0
		Brick/Masonry	100%	5.9	0.0
		Drywall	100%	5.9	0.0
		Carpet/Carpet Padding	100%	5.9	0.0
		Mixed Debris	74%	4.4	1.5
		Trash	0%	0.0	5.9
BUILDING B6 TOTAL			84%	39.7	7.4
Building B7	3,017	Metals	100%	0.5	0.0
		Concrete/Asphalt	100%	0.5	0.0
		Wood	100%	0.5	0.0
		Brick/Masonry	100%	0.5	0.0
		Drywall	100%	0.5	0.0
		Carpet/Carpet Padding	100%	0.5	0.0
		Mixed Debris	74%	0.3	0.1
		Trash	0%	0.0	0.5
BUILDING B7 TOTAL			84%	3.1	0.6
Building B8	2,473	Metals	100%	0.4	0.0
		Concrete/Asphalt	100%	0.4	0.0
		Wood	100%	0.4	0.0
		Brick/Masonry	100%	0.4	0.0
		Drywall	100%	0.4	0.0
		Carpet/Carpet Padding	100%	0.4	0.0
		Mixed Debris	74%	0.3	0.1
		Trash	0%	0.0	0.4
BUILDING B8 TOTAL			84%	2.5	0.5
Building B9	2,735	Metals	100%	0.4	0.0
		Concrete/Asphalt	100%	0.4	0.0
		Wood	100%	0.4	0.0
		Brick/Masonry	100%	0.4	0.0
		Drywall	100%	0.4	0.0
		Carpet/Carpet Padding	100%	0.4	0.0
		Mixed Debris	74%	0.3	0.1
		Trash	0%	0.0	0.4
BUILDING B9 TOTAL			84%	2.8	0.5

Source of Material	New Gross SF	Material	Diversion Rate (Percent) ¹	Tons Diverted ²	Tons Disposed
Building B10	4,986	Metals	100%	0.7	0.0
		Concrete/Asphalt	100%	0.7	0.0
		Wood	100%	0.7	0.0
		Brick/Masonry	100%	0.7	0.0
		Drywall	100%	0.7	0.0
		Carpet/Carpet Padding	100%	0.7	0.0
		Mixed Debris	74%	0.6	0.2
		Trash	0%	0.0	0.7
BUILDING B10 TOTAL			84%	5.0	0.9
Parking Garage/ Subterranean Parking	372,065	Metals	100%	55.8	0.0
		Concrete/Asphalt	100%	55.8	0.0
		Brick/Masonry	100%	55.8	0.0
		Mixed Debris	74%	41.3	14.5
		Trash	0%	0.0	55.8
PARKING GARAGE/SUBTERRANEAN PARKING TOTAL			75%	208.7	70.3
Common Areas ³	345,320	Concrete/Asphalt	100%	51.8	0.0
COMMON AREAS TOTAL			100%	51.8	0.0
TOTAL			82%	548.8	124.2

¹ Trash would be taken to the Miramar Landfill (5180 Convoy Street, San Diego, CA 92111) at a zero percent diversion rate. All other construction debris would be taken to an appropriate facility listed on the City's Certified C&D Recycling Facility Directory. Facilities that process metals, concrete/asphalt, and wood all achieve a 100 percent diversion rate for these materials. Facilities that process mixed debris achieve a minimum 74 percent diversion rate, which was conservatively assumed for this project (City 2021; Appendix A).

² For each material type, construction waste quantities are calculated based on:
Three lbs of waste per building SF (e.g., 85,865 SF for building B3 x 3 lbs/SF = 257,595 lbs, or 129 tons);
Total construction material required x 10 percent = anticipated quantity of construction waste generated (12.9 tons)

³ Common areas include pedestrian concrete paving and vehicular paving.

Note that numbers may not total due to rounding.

lbs = pounds; SF = square feet

4.1.1 Proposed Post-Consumer Content Construction Materials

In order to further minimize waste, the project would utilize recycled content construction materials, where feasible. Given the preliminary nature of the project plans, a minimum target of five percent is anticipated, with verification of purchase of materials equating to this target to be provided prior to or during the pre-construction meeting. See Section 6.1, for the construction waste management, coordination, and oversight measures that would be implemented pursuant to this WMP.

5.0 OCCUPANCY WASTE

5.1 STORAGE

The project would be managed under the Applicant or its designee(s). The City's Storage Ordinance (SDMC Section 142.0801 et. seq.) requires the provision of separate bins for recyclable waste products to be separated from non-recyclable solid waste. To comply with the Storage Ordinance, recycling containers would be provided at convenient locations throughout the development, meeting or exceeding the minimums shown in Table 1.

5.2 WASTE GENERATION – EXISTING USES

The project site's existing uses that would be demolished as part of the project include R&D uses. To understand the change in waste generated during occupancy, estimates of existing waste generation of buildings that will be demolished were calculated. The City's ESD provides a list of waste generation factors for the occupancy phase of development, included as Appendix C of this report. Table 6, *Estimated Annual Solid Waste Generation and Diversion Rates – Existing Buildings*, shows the estimated waste generation and diversion for the existing R&D buildings on the site. Because existing buildings B1 and B2 would remain, they are not included in the calculations of existing or future uses.

Table 6
ESTIMATED ANNUAL SOLID WASTE GENERATION AND DIVERSION RATES – EXISTING BUILDINGS

Source of Material	Square Footage	Existing Building Use	Waste Generation Factor ¹	Tons Generated (per year)	Expected Percent Diverted from Source-Separated Recycling ²	Tons Diverted (per year)	Tons Disposed (per year)
Existing Building to be Demolished	147,458	Office	0.0017	250	40%	100	150
TOTAL				250	--	100	150

¹ Waste generation factors provided in Appendix C to this WMP.

² Reflects compliance with existing City Storage Ordinance and City Recycling Ordinance.

As shown in the table, the existing buildings planned to be demolished currently generate approximately 250 tons of waste, of which 150 tons would be disposed and 100 tons would be diverted. These estimates are based on the City's current waste generation factors, and do not take into consideration any additional sustainability measures and recycling programs that may be implemented by current vendors.

5.3 WASTE GENERATION – PROJECT USES

The Applicant or its designee(s) would educate the vendor(s) for on-site custodial duties regarding the appropriate waste diversion program to ensure the proper handling of waste. Each vendor employee would be educated on the principles of proper waste handling and diversion to meet the Applicant's goal to reduce/reuse/recycle. The estimated waste generation and diversion for the proposed buildings are shown in Table 7, *Estimated Annual Solid Waste Generation and Diversion Rates – Proposed Buildings*.

Table 7
ESTIMATED ANNUAL SOLID WASTE GENERATION AND DIVERSION RATES – PROPOSED BUILDINGS

Source of Material	Square Footage	Proposed Building Use ¹	Waste Generation Factor ¹	Tons Generated (per year)	Expected Percent Diverted from Source-Separated Recycling ^{2,3}	Tons Diverted (per year)	Tons Disposed (per year)
Building B3	85,865	Office	0.0017	146	40%	58	88
Building B4	78,346	Office	0.0017	133	40%	53	80
Building B5	68,456	Office	0.0017	116	40%	47	70
Building B6	39,296	Office	0.0017	67	40%	27	40
Building B7	3,017	Restaurant	0.0122	37	40%	15	22
Building B8	2,473	Restaurant	0.0122	30	40%	12	18
Building B9	2,735	Restaurant	0.0122	33	40%	13	20
Building B10	4,986	Restaurant	0.0122	61	40%	24	36
Parking Structure/ Subterranean Parking	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Common Areas	N/A	N/A	N/A	N/A	N/A	N/A	N/A
TOTAL				623	--	249	374

¹ Waste generation factors provided in Appendix C to this report; for buildings providing a variety of uses, the most conservative waste generation factor was used.

² Reflects compliance with existing City Storage Ordinance and City Recycling Ordinance.

³ The Applicant would contract with City-approved recycling haulers and disposal facilities.

As shown in the table, it is anticipated that at full buildout, approximately 374 tons of waste are anticipated to be disposed of annually, and approximately 249 tons are estimated to be diverted in association with the new structures. These estimates are based on the City's current waste generation factors, which do not take into consideration additional sustainability measures and recycling programs that may be implemented at the project and exceed the overall 40 percent diversion estimated by the City for occupancy. In addition, where a mix of uses is proposed, the most conservative waste generation factor was used since the anticipated SF for each use is not currently known at this time. For example, buildings B7, B8, B9, and B10 would have a mix of retail and restaurants, but a waste generation factor of 0.0122 for restaurants was conservatively applied in this analysis (compared to a waste generation rate of 0.0028 for retail). Because it is unlikely that all buildings would exclusively contain restaurants, the actual waste generation would be much lower than the estimated waste generation rates.

5.4 CHANGE IN WASTE GENERATION

Based on the difference between the existing buildings' waste generation and the proposed buildings' waste generation, the project would result in a net increase of 373 tons of waste. Of this, 224 tons would be disposed, and 149 would be diverted from the landfill. As noted, these estimates are conservative based on the assigned building uses, and do not take into account potential additional sustainability programs.

6.0 WASTE REDUCTION, RECYCLING, AND DIVERSION MEASURES

The Applicant is committed to waste reduction during all aspects of project demolition, grading, construction, and operation, and would incorporate the Waste Diversion Measures (WDM) described below to ensure compliance with applicable solid waste disposal and waste reduction regulations and ordinances. Mandatory compliance with these measures shall be included in all project contractor agreements, clearly reflected on project plans, and verifiable by City ESD staff through written submittals and/or site inspections as described below.

6.1 CONSTRUCTION WASTE MANAGEMENT, COORDINATION, AND OVERSIGHT

6.1.1 Contractor Agreements and City Coordination

All WDM described herein shall be included as part of contractor agreements and clearly reflected on project plans identifying activities required to be undertaken during clearing, grading, and construction. These measures shall also be provided in checklist format to City ESD staff prior to the initiation of any activities identified in the WMP. ESD staff shall be allowed access to the project site, project plans, and contractor education program meetings and materials (described below) to verify conformance with these measures.

6.1.2 Designation of a Solid Waste Management Coordinator

Prior to initiation of any construction, clearing, grading, or grubbing activities on site, the Applicant shall designate a Solid Waste Management Coordinator (SWMC) for the property with the authority to provide guidelines and procedures for contractor(s) and staff to implement waste reduction and recycling efforts. These responsibilities shall include, but are not limited to, the following:

- Prepare a Contractor Education Program on the waste separation and diversion/disposal procedures specified in this WMP. The Contractor Education Program shall contain, at a minimum, the following information:
 - Written and visual description of each waste type required to be source separated
 - Written and graphic description of how each waste type must be treated prior to and during source separation
 - Direction on which waste types go to mixed-debris facilities
 - Direction on which waste types go to Miramar Landfill
 - Direction on materials requiring special handling, such as hazardous materials
 - Contact for designated contractor in case of questions or emergency
 - Contact at City ESD in case of questions or emergency
 - Phone number, address, and telephone contact information for each contracted hauler and disposal/diversion facility to be utilized

- Ensure the correct number and signage of bins, as specified in this WMP.
- Ensure a maximum 5 percent contamination by different waste types/non-recyclable materials by weight in the bins.
- Ensure no overtopping of bins occurs.
- Work with contractor(s) to refine estimated quantities of each type of material that would be recycled, reused, or disposed of as waste, then assist contractor(s) with documentation of that waste through receipts at each recycling and landfill facility identified in this WMP, or as otherwise agreed to by ESD staff.
- Issue stop work orders if procedures and standards specified in this WMP are not being followed/met.
- Coordinate with ESD and/or Mitigation Monitoring staff, including regular communication and invitations to the work site, and ensure appropriate staff members are involved at every stage.
- Ensure ESD staff attendance at the contractor education meeting and pre-construction meetings of each phase of the development.

6.1.3 Contractor Waste Management Training

The project's SWMC or an ESD-approved contractor designee shall carry out Contractor Education Program presentations ensuring all project personnel are trained regarding content and requirements of this WMP. Prior to beginning work on any portion of the project, each member of the team, including all workers, subcontractors, and suppliers, shall be provided with a copy of the WMP, and undergo training on proper waste management procedures applicable to the project.

- The project's SMWC, or ESD-approved Contractor-designee shall carry out contractor waste management training presentations for each new group or individual hired, contracted, or assigned to work on the project.
- The SMWC and/or Contractor-designee shall ensure that each person working on the project has completed the waste management training by maintaining a written log to be signed and dated by each trainee upon completion of the training program. Copies of this written log, along with a list of all applicable personnel, shall be provided to City ESD staff for verification during each phase of project activities.

6.1.4 Daily Site Inspections by Contractor(s)

The project contractor(s) shall conduct daily inspections of the construction site to ensure compliance with the requirements of this WMP and with all other applicable laws and ordinances. Daily inspections shall include verifying the availability and number of dumpsters based on amount of debris being generated, verifying trash and recycled materials dumpsters are correctly labeled, ensuring proper sorting and segregation of materials, and ensuring excess materials are properly salvaged. The project contractor(s) shall report the results of the daily site inspections to the SWMC.

6.1.5 Regular Removal of Waste Materials

The project contractor(s) shall ensure removal of construction waste materials in sufficient frequency to prevent over-topping of bins. The accumulation and burning of on-site grading/land-clearing and construction waste materials shall be prohibited.

6.1.6 City Verification

The Applicant shall ensure a representative of the City's ESD attends pre-construction meetings prior to clearing, grading, and construction to ensure that the following items are verified:

- Material segregation, recycling, and reuse is occurring per the WMP;
- Soil is being transported to an appropriate facility for reuse;
- Grubbed materials are sent to a suitable green waste recycling facility;
- Contract documents have appropriate estimates and constraints to avoid "overbuying" construction materials;
- Contract documents specify methods to achieve five percent post-consumer content goal;
- Contamination levels (i.e., different waste types/non-recyclable materials) do not exceed five percent by weight;
- An appropriate diversion rate (as specified in this WMP) has been included on the deposit form;
- Contract documents specify agreements for each recyclable/reusable material type to be taken to an appropriate recycling/reuse facility, as specified in this WMP; and
- Minimum exterior refuse and recyclable material storage areas have been incorporated into project plans, as a requirement of the City Storage Ordinance (SDMC Section 142.0801 et seq.).

6.2 CONSTRUCTION WASTE REDUCTION, DIVERSION COMPLIANCE, AND VERIFICATION

6.2.1 Identification, Separation, and Diversion of Recyclable/Reusable Materials

The Applicant shall ensure that:

- Throughout project activities, waste materials shall be source separated on site into the appropriate bin based on materials type, as stated in this WMP. Materials generated during clearing, grading, and construction that would-be source separated and recycled are listed below:
 - Mixed C&D (wood, dirt, concrete, drywall, brick, metals, rock, asphalt, tile, cardboard)
 - Metals

- Concrete/Asphalt
 - Brick/Masonry
 - Wood
 - Drywall
 - Carpet/Carpet padding
 - Clean fill dirt
 - Green waste
- A separate bin for each clean waste material type to be generated during each phase of clearing, grading, and construction activity shall be provided on the site, subject to the following requirements:
 - Containers shall be clearly labeled, with a list of acceptable and unacceptable materials. The list of acceptable materials must be the same as the materials recycled at the receiving material recovery facility or recycling processor.
 - The collection containers for recyclable grading/land-clearing and construction waste shall contain no more than five percent non-recyclable materials, by weight.
 - Regular visual inspections of dumpsters and recycling bins shall be conducted to remove contaminants.
 - Recycling areas shall be clearly identified with large signs. Lists of acceptable and unacceptable materials shall be posted on recycling bins and throughout the project site and all recycled material signage shall be visible on at least two sides of haul containers.
 - Recycling bins shall be placed in areas that would be readily accessible and would minimize misuse or contamination. The SWMC shall be responsible for these efforts and they shall be reviewed at pre-construction meetings and/or during contractor education meetings, if conducted separately.
 - Recyclable and/or reusable waste materials collected in source-separated bins shall be diverted to recycling/reuse facilities as designated in Tables 4 and 5 of this WMP, or to another facility listed on the City's *Certified C&D Recycling Facility Directory*, should the designated facilities not be available.

6.2.2 Source Reduction Measures

Project contractors and subcontractors, in cooperation with the project's SWMC and ESD staff, as applicable, shall coordinate to minimize the over-purchasing of construction materials to lower the amount of materials taken to recycling and disposal facilities. The project shall minimize over-purchasing through purchase of pre-cut materials, whenever feasible. The following steps shall be undertaken:

- Detailed material estimates shall be used to reduce risk of unplanned and potentially wasteful material cuts.

- Contractor and subcontractor material purchasing agreements shall include a waste reduction provision requesting that: materials and equipment be delivered in packaging made of recyclable material; vendors reduce the amount of packaging; packaging be taken back by vendors for reuse or recycling; and vendors take back all unused product. Contracts containing this language shall be made available to ESD staff during ESD site visits for inspection.
- Post-consumer content products shall be employed in the design and construction of the new facilities with the goal of achieving five percent post-consumer content materials. Efforts to use post-consumer content may include using products manufactured with post-consumer content materials (i.e., products that were bought, used, and recycled by consumers), such as natural textiles, aggregate, or concrete. Receipts demonstrating post-consumer content shall be provided to ESD staff at or prior to the pre-construction meetings.
- Prior to submittal, final project plans shall indicate the anticipated source and quantity of materials to be reused on site, and the source, quantity, and percentage of post-consumer content waste products anticipated to be utilized for project construction.
- Contractors shall include the anticipated source and quantity of post-consumer content products proposed for reuse or purchase in their project bid.
- Final project plans inclusive of the information above shall be provided to ESD for verification.

6.3 OPERATIONAL WASTE MANAGEMENT AND DIVERSION MEASURES

The Applicant shall undertake and/or shall specify in contract language and/or sales/lease agreements with any tenant, operator, and/or future owner, a list of recycling requirements with which the Applicant or future tenants, operators, and/or owners shall be obligated to comply, including, but not limited to, the following:

- Recycling areas shall be clearly identified with large signs.
- Lists of acceptable and unacceptable materials shall be posted on recycling bins.
- All recycled material signage shall be visible on at least two sides of recycling containers.
- Recycling bins shall be placed in areas that would be readily accessible and would minimize misuse or contamination.
- Prepare and distribute recycling educational materials for inspection by ESD prior to certificate of occupancy.
- After materials are approved, distribute to all project site owners/occupants.
- Green waste generated by ongoing landscaping and landscape maintenance activities shall be source separated by the landscaping contractor, and diverted to Miramar Greenery.

Prior to issuance of any certificate of occupancy/tentative certificate of occupancy, the Applicant shall invite a representative of the City ESD to:

- Inspect and approve storage areas that have been provided consistent with the City's Storage Ordinance;
- Ensure that a hauler has been retained to provide recyclable materials collection, and, if applicable, landscape waste collection; and
- Inspect and approve education materials for building tenants/owners that are required pursuant to the City's Recycling Ordinance.

For specialized product purchasing (e.g., with recycled content) to be used during occupancy, the Applicant shall provide for inspection by ESD the documentation that would be used to carry out this requirement.

7.0 CONCLUSION

As discussed under Regulatory Framework, a project may result in a significant direct impact under the City CEQA Significance Determination Thresholds if it generates more than 1,500 tons of solid waste materials during construction and demolition. Projects that include the construction, demolition, and/or renovation of 40,000 SF or more of building space or generate approximately 60 tons of waste or more are considered to have potentially significant cumulative impacts on solid waste services. Further, AB 341 requires the diversion of 75 percent of solid waste and mandatory provision of recycling collection service during occupancy.

7.1 SUMMARY OF WASTE GENERATION AND DIVERSION

During pre-construction demolition, clearing/grubbing, and grading, the project would produce 271,609 tons of excavated soils, green waste, asphalt/concrete, and other C&D waste, and divert 267,884 tons of these materials from the landfill, as identified in Table 4. Approximately 3,725 tons of solid waste material generated during pre-construction is anticipated to be disposed of as non-recyclable/non-reusable waste at Miramar Landfill, for an overall pre-construction diversion rate of 99 percent.

During construction, the project would produce approximately 673 tons of solid waste (metal, concrete, concrete/steel, asphalt, brick/masonry, wood, drywall, carpet/carpet padding, mixed debris, and trash), and divert 549 tons of solid waste materials from the landfill, as identified in Table 5. The diverted material would consist of clean, source-separated (segregated) recyclable and/or reusable material, as well as mixed debris, to be deposited at the recycling/reuse facilities identified in the City's Certified C&D Recycling Facility Directory (City 2021; Appendix A). Approximately 124 tons of solid waste material generated during construction is anticipated to be disposed of as non-recyclable/non-reusable waste at Miramar Landfill, for an overall diversion rate during construction of approximately 82 percent.

With the combined pre-construction and construction phases, the project would produce 272,282 tons of solid waste and would divert 268,433 tons. This would be an overall diversion rate during pre-construction and construction of 99 percent.

During occupancy, it has been estimated that the project would generate an additional 373 tons of waste per year over existing conditions, of which 149 tons per year would be diverted to recycling/reuse facilities, resulting in an estimated 40 percent diversion of waste from the landfill, as identified in Table 7. These materials would consist of clean, recyclable materials, gathered in on site recycling bins. An additional 224 tons per year, or 60 percent of occupancy material generated, are estimated to be disposed of as non-recyclable/non-reusable waste at Miramar Landfill.

7.2 COMPLIANCE WITH CITY AND STATE REGULATIONS

Project compliance with City and State regulations is addressed below.

7.2.1 State of California

Based on the quantified waste generation and diversion rates discussed above, the project would exceed the 75 percent solid waste diversion rate for waste produced during the pre-construction and construction phases. The project would fail to meet the 75 percent waste reduction target annually once the buildings are occupied. This shortcoming is overcome by the following factors:

- The segregation proposed during pre-construction and construction would achieve an overall 99 percent diversion rate, exceeding the 75 percent target.
- The project would incorporate mandatory waste reduction, recycling, and diversion measures as identified in Sections 6.1 and 6.2 of this WMP during pre-construction and construction, to further reduce solid waste impacts.
- Ongoing diversion of green waste (landscaping debris) to Miramar Greenery would avoid unnecessary contributions to Miramar Landfill.
- To minimize generation of waste materials, the project would incorporate recycled, post-consumer content materials in interiors and exteriors, to the extent practicable.

In addition to these measures implemented during pre-construction and construction activities, the Applicant would commit to the recycling requirements identified in Section 6.3 of this WMP, to further reduce solid waste impacts during occupancy.

7.2.2 City of San Diego

Based on the quantified waste generation and diversion rates discussed above, the project would result in a significant impact regarding the City's CEQA Significance Determination Threshold for direct impacts to solid waste facilities during demolition and construction.

The project would be above the City's threshold (generation of more than 1,500 tons of solid waste materials) for direct impacts to solid waste facilities during demolition and construction ($3,725 + 124 = 3,849$ tons C&D materials to Miramar Landfill).

Regarding cumulative impacts, the project proposes greater than 40,000 SF of building space, and the project would be above the City's CEQA Significance Determination Threshold of 60 tons for disposal of waste during C&D. During occupancy, the project would achieve an average 40 percent diversion of

waste via source-separated recycling and would dispose of approximately 224 additional tons of waste per year once the buildings are occupied, compared to existing conditions. This would exceed the City's CEQA Significance Determination Threshold for cumulative impacts to solid waste services.

As mitigation, the City requires implementation of this document, a project-specific WMP, to identify measures for waste reduction. These waste exceedances would be overcome by the waste reduction achieved during construction through measures described in Sections 6.1 and 6.2 of this WMP. Through the quantified waste generation and diversion rates discussed in this document, the project would exceed the 75 percent solid waste diversion rate for waste produced during demolition and construction phases by achieving an overall 99 percent diversion rate. In addition, the measures specified for operation in Section 6.3 of this WMP would provide adequate waste management. Regarding trash and recycling storage space during operation, for the office, restaurant, and retail uses, the project would provide at least 1,095 SF of trash and recycling storage space, per the City Storage Ordinance (Table 1). The project would comply with the City Recycling Ordinance by providing adequate space, bins, and educational materials for recycling during occupancy. Additionally, the project would provide adequate organic waste disposal space once regulations are adopted by the City.

Through compliance with waste diversion measures included in this WMP, plus implementation of sustainability and efficiency features, the project's direct solid waste impact would be less than significant and the project's contribution to a cumulative solid waste generation would be reduced to a level that is less than cumulatively considerable.

8.0 LIST OF PREPARERS

Kristen Garcia	Environmental Planner
Vanessa Toscano	Project Manager
Yara Fisher	QA/QC

9.0 REFERENCES

California Department of Resources Recycling and Recovery (CalRecycle). 2002. Military Base Closure Handbook – A Guide to Construction and Demolition Materials Recovery. As amended, January (prepared under former agency name “California Integrated Waste Management Board”).

Federal Emergency Management Agency (FEMA). 2010. Debris Estimating Field Guide (FEMA 329). Federal Emergency Management Agency, U.S. Department of Homeland Security. September. Available at:
http://www.fema.gov/pdf/government/grant/pa/fema_329_debris_estimating.pdf.

International Code Council (ICC). 2015. 2015 International Building Code, Chapter 6: Types of Construction. October. Available at: <https://codes.iccsafe.org/content/IBC2015/chapter-6-types-of-construction>.

San Diego, City of. 2021. 2021 Certified Construction & Demolition Recycling Facility Directory. Environmental Services Department. October 4. Available at:
<https://www.sandiego.gov/sites/default/files/certified-cd-recycling-facility-directory.pdf>.

2016a. California Environmental Quality Act Significance Determination Thresholds. July.

2016b. Construction and Demolition (C&D) Debris Recycling Fact Sheet. June 29. Available at:
https://www.sandiego.gov/sites/default/files/legacy/development-services/pdf/industry/infobulletin/cd_fact_sheet_6_29_16.pdf.

2016c. City of San Diego Construction & Demolition Debris Conversion Rate Table. June 6.

2015. City of San Diego Zero Waste Plan. July. Available at:
<https://www.sandiego.gov/sites/default/files/legacy/mayor/pdf/2015/ZeroWastePlan.pdf>.

2013. California Environmental Quality Act: Guidelines for a Waste Management Plan. June. Available at:
<http://www.sandiego.gov/environmentalservices/pdf/recycling/wmpguidelines.pdf>.

2012. City of San Diego Waste Generation Factors – Occupancy Phase. October 1.

2011. California Environmental Quality Act Significance Determination Thresholds. Development Services Department. Available at:
<http://www.sandiego.gov/developmentservices/pdf/news/sdtceqa.pdf>. January, as amended.

2008. Construction and Demolition Debris Deposit Ordinance (Municipal Code Chapter 6, Article 6, Division 6). January 1.

2007. Recycling Ordinance (Municipal Code Chapter 6, Article 6, Division 7). November.

1997. Refuse and Recyclable Materials Storage Regulations (Municipal Code Chapter 14, Article 2 Division 8). December 9.

State of California. 1989. California Integrated Waste Management Act of 1989. State of California Assembly Bill 939.

Appendix A

Certified Construction & Demolition Recycling Facility Directory



• **Material taken to a landfill is DISPOSAL. NO diversion credit is given for any material taken to a landfill.**

• You must use one of these facilities to receive diversion credit.

• Please call ahead to confirm details such as accepted materials, days and hours of operation, limitations on vehicle types, and cost.

• Ensure the project address and permit number are on the receipt.

The facilities marked below with an asterisk are transfer stations

IMPORTANT DRIVER INSTRUCTIONS - If you deliver to a transfer station, you must have your driver:

- State that your load is Construction and Demolition (C&D) debris, and ensure it is coded correctly on the receipt.

- Tickets coded as "MSW, trash, or refuse" will receive 0% credit.

	Asphalt/Concrete	Brick/Block/Rock	Building Materials for Reuse	Cardboard	Carpet	Carpet Padding	Ceiling Tile	Ceramic Tile/Porcelain	Clean Fill Dirt	Clean Wood/Green Waste	Drywall	Industrial Plastics	Lamps/Light Fixtures	Metal	Mixed Inerts	Styrofoam Blocks	Trash	Mixed C & D Debris
EDCO Recovery & Transfer 3660 Dalbergia St, San Diego, CA 92113 619-234-7774 www.edcodisposal.com	•								•							•		76%
EDCO Station Transfer Station & Buy Back Center 8184 Commercial St, La Mesa, CA 91942 619-466-3355 www.edcodisposal.com	•			•					•			•				•		76%
EDCO CDI Recycling & Buy Back Center 224 S. Las Posas Rd, San Marcos, CA 92078 760-744-2700 www.edcodisposal.com				•	•	•						•				•		82%
Escondido Resource Recovery 1044 W. Washington Ave, Escondido 760-745-3203 www.edcodisposal.com																		76%
Fallbrook Transfer Station & Buy Back Center 550 W. Aviation Rd, Fallbrook, CA 92028 760-728-6114 www.edcodisposal.com				•								•				•		76%
Otay C&D/Inert Debris Processing Facility 1700 Maxwell Rd, Chula Vista, CA 91913 619-421-3773 www.sd.disposal.com																		74%
Ramona Transfer Station & Buy Back Center 324 Maple St, Ramona, CA 92065 760-789-0516 www.edcodisposal.com				•								•				•		76%
SANCO Resource Recovery & Buy Back Center 6750 Federal Blvd, Lemon Grove, CA 91945 619-287-5696 www.edcodisposal.com				•	•	•						•						76%
Allan Company 6733 Consolidated Wy, San Diego, CA 92121 858-578-9300 www.allancompany.com/facilities				•								•						
Allan Company Miramar Recycling 5165 Convoy St, San Diego, CA 92111 858-268-8971 www.allancompany.com/facilities				•								•						
Alpine Asphalt & Concrete Recycling 5690 Willows Rd, Alpine, CA 91901 760-451-6481 www.alpineasphaltandconcrete.com	•	•	•					•										
Alpine Asphalt & Concrete Recycling 0 Duro Rd, Escondido, CA 92028 760-451-6481 www.alpineasphaltandconcrete.com	•	•	•					•										
Aquafil Carpet Collection 187 Mace St, Chula Vista, CA 91911 619-816-0787 www.aquafil.com				•	•													



• **Material taken to a landfill is DISPOSAL. NO diversion credit is given for any material taken to a landfill.**

• You must use one of these facilities to receive diversion credit.

• Please call ahead to confirm details such as accepted materials, days and hours of operation, limitations on vehicle types, and cost.

• Ensure the project address and permit number are on the receipt.

***If using a transfer station, you must:**

- State that your load is Construction and Demolition (C&D) debris, and ensure it is coded correctly on the receipt.

- Tickets coded as "MSW, trash, or refuse" will receive 0% credit.

	Asphalt/Concrete	Brick/Block/Rock	Building Materials for Reuse	Cardboard	Carpet	Carpet Padding	Ceiling Tile	Ceramic Tile/Porcelain	Clean Fill Dirt	Clean Wood/Green Waste	Drywall	Industrial Plastics	Lamps/Light Fixtures	Metal	Mixed Inerts	Styrofoam Blocks	Trash	Mixed C & D Debris
Aquafil Carpet Collection 7720 Formula Pl, San Diego , CA 92126 602-562-0444 www.aquafil.com				•	•													
Armstrong World Industries, Inc. 300 S. Myrida St, Pensacola, FL 32505 877-276-7876 (Press 1, Then 8) www.armstrong.com/commceilingsna						•												
CMS Recycling Inc. 1428 West Mission Rd, Escondido, CA 92029 760-741-6300 www.cmsmetals.com			•									•						
DFS Flooring 10178 Willow Creek Rd, San Diego, CA 92131 858-630-5200 www.dfsflooring.com				•	•													
Duco Metals 220 Bingham Drive Suite 100, San Marcos, CA 92069 760-747-6330 www.ducometals.com												•						
Escondido Materials 500 N. Tulip St, Escondido, CA 92025 760-432-4690 www.weirasphalt.com	•																	
F.J. Willert Contracting 2385 Cactus Rd, San Diego, CA 92154 619-421-1980 www.fjwillert.com	•																	
Habitat for Humanity ReStore 8101 Mercury Ct, San Diego, CA 92108 619-516-5267 www.sandiegohabitat.org		•																
Hanson Aggregates – Hollister St 389 Hollister St, San Diego, CA 92154 858-974-3849	•																	
Hanson Aggregates West – Lakeside Plant 12560 Highway 67, Lakeside, CA 92040 858-547-2141	•																	
Hanson Aggregates West – Miramar 9229 Harris Plant Rd, San Diego, CA 92126 858-974-3849	•						•											
HVAC Exchange 2675 Faivre St, Chula Vista, CA 91911 619-423-1564 www.hvacx.com												•						



• **Material taken to a landfill is DISPOSAL. NO diversion credit is given for any material taken to a landfill.**

• You must use one of these facilities to receive diversion credit.

• Please call ahead to confirm details such as accepted materials, days and hours of operation, limitations on vehicle types, and cost.

• Ensure the project address and permit number are on the receipt.

***If using a transfer station, you must:**

- State that your load is Construction and Demolition (C&D) debris, and ensure it is coded correctly on the receipt.

- Tickets coded as **"MSW, trash, or refuse"** will receive 0% credit.

	Asphalt/Concrete	Brick/Block/Rock	Building Materials for Reuse	Cardboard	Carpet	Carpet Padding	Ceiling Tile	Ceramic Tile/Porcelain	Clean Fill Dirt	Clean Wood/Green Waste	Drywall	Industrial Plastics	Lamps/Light Fixtures	Metal	Mixed Inerts	Styrofoam Blocks	Trash	Mixed C & D Debris
Inland Pacific Resource Recovery 12650 Slaughterhouse Canyon Rd, Lakeside, CA 92040 619-390-1418 www.iprrgreen.com									•									
Los Angeles Fiber Company 4920 S. Boyle Ave, Vernon, CA 90058 323-589-5637 www.lafiber.com				•	•													
Miramar Greenery, City of San Diego 5180 Convoy St, San Diego, CA 92111 858-694-7000 www.miramargreenery.com									•									
Moody's 3210 Oceanside Blvd, Oceanside, CA 92056 760-433-3316 www.moodyselecorazonrecycling.com	•							•						•				
RAMCO 8354 Nelson Way, Escondido, CA 92026 760-205-1797 www.ramco.us.com	•																	
Reclaimed Aggregates Chula Vista 855 Energy Way, Chula Vista, CA 91913 619-656-1836	•													•				
Robertson's Ready Mix 2094 Willow Glen Dr, El Cajon, CA 92019 619-593-1856 www.rrmca.com	•							•						•				
Rockridge Crushing 12485 Highway 67, Lakeside, CA 92040 619-324-7065	•																	
SA Recycling 3055 Commercial St, San Diego, CA 92113 619-238-6740 www.sarecycling.com													•					
SA Recycling 1211 S. 32nd St, San Diego, CA 92113 619-234-6691 www.sarecycling.com													•					
SCOR Industries 2321 South Willow Ave, Bloomington, CA 92316 909-820-5046 www.scorindustries.com	•	•	•			•		•	•	•		•	•					
Terra Bella Nursery 302 Hollister St, San Diego, CA 92154 619-585-1118 www.terrabellanursery.com								•	•									



2021 Certified Construction & Demolition (C&D) Recycling Facility Directory

- **Material taken to a landfill is DISPOSAL. NO diversion credit is given for any material taken to a landfill.**
- You must use one of these facilities to receive diversion credit.
- Please call ahead to confirm details such as accepted materials, days and hours of operation, limitations on vehicle types, and cost.
- Ensure the project address and permit number are on the receipt.

***If using a transfer station, you must:**

- State that your load is Construction and Demolition (C&D) debris, and ensure it is coded correctly on the receipt.
- Tickets coded as **"MSW, trash, or refuse"** will receive 0% credit.

[illegible]

Appendix B

City of San Diego C&D Debris Conversion Rate Table



CITY OF SAN DIEGO

Construction & Demolition (C&D) Debris

Conversion Rate Table

This worksheet lists materials typically generated from a construction or demolition project and provides formulas for converting common units (i.e. cubic yards, square feet, and board feet) to tons. It is a tool that should be used for preparing your Waste Management Form - Part I, which requires that quantities be provided in tons.

Note: Weigh receipts are required for your refund request.

Step 1: Enter the estimated quantity for each applicable material in Column I, based on units

Step 2: Multiply by Tons/Unit figure listed in Column II. Enter the result for each material in Column III.

If using Excel version, column III will automatically calculate tons.

Step 3: Enter quantities for each separated material from Column III on this worksheet into the corresponding section of your Waste Management Form - Part I.

Category	Material	Column I		Column II		Column III	
		Volume	Unit	Tons/Unit		Tons	
Asphalt/Concrete	Asphalt (broken)		cy	x	0.70	=	
	Concrete (broken)		cy	x	1.20	=	
	Concrete (solid slab)		cy	x	1.30	=	
Brick/Masonry/Tile	Brick (broken)		cy	x	0.70	=	
	Brick (whole, palletized)		cy	x	1.51	=	
	Masonry Brick (broken)		cy	x	0.60	=	
	Tile		sq ft	x	0.00175	=	
Building Materials (doors, windows, cabinets, etc.)			cy	x	0.15	=	
Cardboard (flat)			cy	x	0.05	=	
Carpet	By square foot		sq ft	x	0.0005	=	
	By cubic yard		cy	x	0.30	=	
Carpet Padding/Foam			sq ft	x	0.000125	=	
Ceiling Tiles	Whole (palletized)		sq ft	x	0.0003	=	
	Loose		cy	x	0.09	=	
Drywall (new or used)	1/2" (by square foot)		sq ft	x	0.0008	=	
	5/8" (by square foot)		sq ft	x	0.00105	=	
	Demo/used (by cubic yd)		cy	x	0.25	=	
Earth	Loose/Dry		cy	x	1.20	=	
	Excavated/Wet		cy	x	1.30	=	
	Sand (loose)		cy	x	1.20	=	
Landscape Debris (brush, trees, etc)			cy	x	0.15	=	
Mixed Debris	Construction		cy	x	0.18	=	
	Demolition		cy	x	1.19	=	
Scrap metal			cy	x	0.51	=	
Shingles, asphalt			cy	x	0.22	=	
Stone (crushed)			cy	x	2.35	=	
Unpainted Wood & Pallets	By board foot		bd ft	x	0.001375	=	
	By cubic yard		cy	x	0.15	=	
Garbage/Trash			cy	x	0.18	=	
Other (estimated weight)			cy	x estimate		=	
			cy	x estimate		=	
			cy	x estimate		=	
Total All							

Appendix C

City of San Diego Waste Generation Factors – Occupancy Phase

Waste Generation Factors – Occupancy Phase

The following factors are used by the City of San Diego Environmental Services Department to estimate the expected waste generation in a new residential or commercial development.

Residential Uses

Residential Unit = 1.6 tons/year/unit

Multi-family Unit = 1.2 tons/year/unit

Example: To calculate the amount of waste that will be generated from a project with 100 new homes, multiply the number of homes by the generation factor.

100 single family homes x 1.6 = 160 tons/year

100 multi-family units x 1.2 = 120 tons/year

Commercial/Industrial Uses

General Retail	0.0028
Restaurants & Bars	0.0122
Hotels/Motels	0.0045
Food Stores	0.0073
Auto/Service/Repair	0.0051
Medical Offices	0.0033
Hospitals	0.0055
Office	0.0017
Transp/Utilities	0.0085
Manufacturing	0.0059
Education	0.0013
Unclassified Services	0.0042

Example: To calculate the amount of waste that could be generated from a new building with 10,000 square feet for offices and 10,000 square feet for manufacturing, multiply the square footage for each use by the generation factor.

10,000 square feet x 0.0017 = 17 tons/year

10,000 square feet x 0.0059 = 59 tons per year

Total estimated waste generation for building = 76 tons/year