


PLAN


12" WIDE BORDER WITH 1/4" GROOVES APPROX. 3/4" OC

PLAN

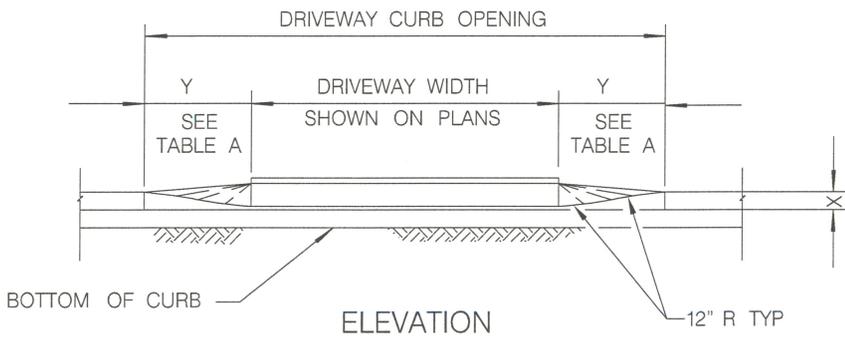


ELEVATION

TABLE A	
X	Y
CURB HEIGHT	RAMP LENGTH
1"	0-6"
2"	1'-6"
3"	2'-6"
4"	3'-6"
5"	4'-6"
6"	5'-6"
7"	6'-6"
8"	7'-6"

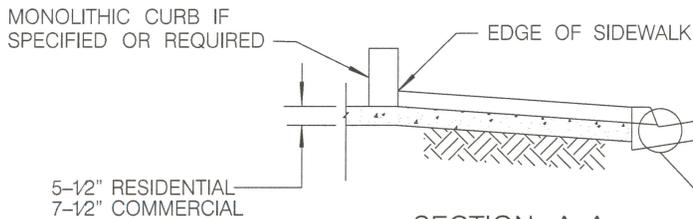

SECTION A-A



NOTES:

1. NO CONCRETE SHALL BE PLACED UNTIL FORMS AND SUBGRADE ARE INSPECTED.
2. CONCRETE SHALL BE 520-C-2500 FOR RESIDENTIAL USE; 560-C-3250 FOR COMMERCIAL USE.
3. SEE STANDARD DRAWING SDG-164 FOR WIDTH AND LOCATION REQUIREMENTS.
4. SEE OTHER STANDARD DRAWINGS FOR CURB AND JOINT DETAILS.
5. ALL HISTORICAL STAMPS / IMPRESSIONS (STREET NAME, CONTRACTOR NAME, AND DATE) SHALL BE PRESERVED.
6. FOR DESIGNATED URBANIZED COMMUNITIES, SIDEWALK DESIGN (SCORING PATTERN, COLOR, TEXTURE) SHALL BE IN CONFORMANCE WITH HISTORIC DESIGN ON ADJACENT PROPERTIES.

REVISION	BY	APPROVED	DATE
ORIGINAL*	KA	J. NAGELVOORT	01/12
UPDATED	RB	J. NAGELVOORT	10/15

CITY OF SAN DIEGO - STANDARD DRAWING

**CONCRETE DRIVEWAY
(FOR CONFINED RIGHT-OF-WAY)**

RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE

CA Bungca 10/15/15
COORDINATOR R.C.E. 56523 DATE

DRAWING NUMBER **SDG-162**